

Variable frequency drives **DC1, DA1, DB1, DM1, DG1** and **DX1**
Decentralized, electronic drive system **Rapid Link 5**

Variable speed starter **DE1**
Soft starters **DS7, S711** and **S811+**

Product Range Catalog

Efficient drive technology for starting,
controlling and regulating motors



EATON

Powering Business Worldwide



We make what matters work.*



At Eaton, we believe that power is a fundamental part of just about everything people do. That's why we're dedicated to helping our customers find new ways to manage electrical, hydraulic and mechanical power more efficiently, safely and sustainably. To improve people's lives, the communities where we live and work, and the planet our future generations depend upon. Because this is what really matters. And we're here to make sure it works.

EATON

Powering Business Worldwide

To learn more go to:
[Eaton.com/whatmatters](https://www.eaton.com/whatmatters)

We make what matters work.

Table of Contents

	Page
Switch, protect, and drive your motors – Today and tomorrow	2
Product overview	4
Software and tools	8
Soft starters	
DS7 soft starters up to 110 kW (two-phase control)	14
S711 soft starters up to 315 kW (three-phase control)	40
S811+ soft starters up to 710 kW (three-phase control)	56
PowerXL variable speed starter PowerXL variable frequency drives	
DE1 variable speed starter up to 7.5 kW	72
DC1 variable frequency drives up to 22 kW	90
DB1 variable frequency drives up to 4 kW	124
DA1 variable frequency drives up to 160 kW	144
DM1 variable frequency drives up to 22 kW	172
DG1 variable frequency drives up to 630 kW	196
DX1 variable frequency drives up to 160 kW	228
General accessories and engineering	252
Rapid Link 5 decentralized drive system	
AS-Interface RAM05, RASP5	274
PROFINET RAM05, RASP5	285
Ethernet/IP RAM05, RASP5	292
Accessory devices	296
Appendix (motor data, motor information)	306
Worldwide export of machines and systems	310
Service information	312

Future-proof switching, protection and operation of motors

With Eaton, you are ideally prepared for meeting the requirements of the new ErP Directive. In addition to revising our existing product range for the safe switching, protection and operation of motors, we have also added a number of clever new solutions.

Flexible solutions for greater energy efficiency

We offer flexible solutions for all types of machine-building applications, from fans, pumps and conveyor belts to hydraulic pumps and more. Whether your application requires constant speed, soft starting or simple or complex speed control – we offer a wide range of products for combination with standard motors and highly energy-efficient drives.



Versatile communication and data acquisition options



Our intelligent connection system reduces wiring costs by up to 85 %. At the same time, it reduces installation errors and simplifies both planning and commissioning. The connected devices deliver both analog and digital data, for example on machine states, motor currents or energy consumption. This helps to increase the availability of machines and systems while optimizing their energy consumption.

Moreover, we also offer additional communication systems. With CANopen or Modbus RTU, you can choose the system that best matches the needs of your plant.

System control and data storage and visualization

The trend towards greater data transparency, particularly with regard to optimizing energy consumption in motor applications, not only requires data to be collected, but also to be analyzed more effectively. The data storage options offered by the machine itself are not sufficient for this purpose. Therefore, the data need to be collected and forwarded to a server for processing via the control system. We also offer the right solution for this task, irrespective of whether the data are locally processed or uploaded to the cloud.

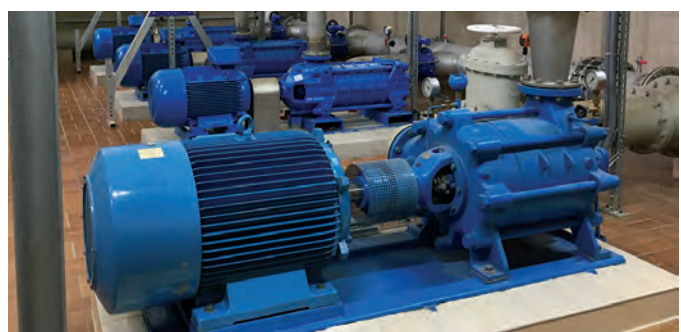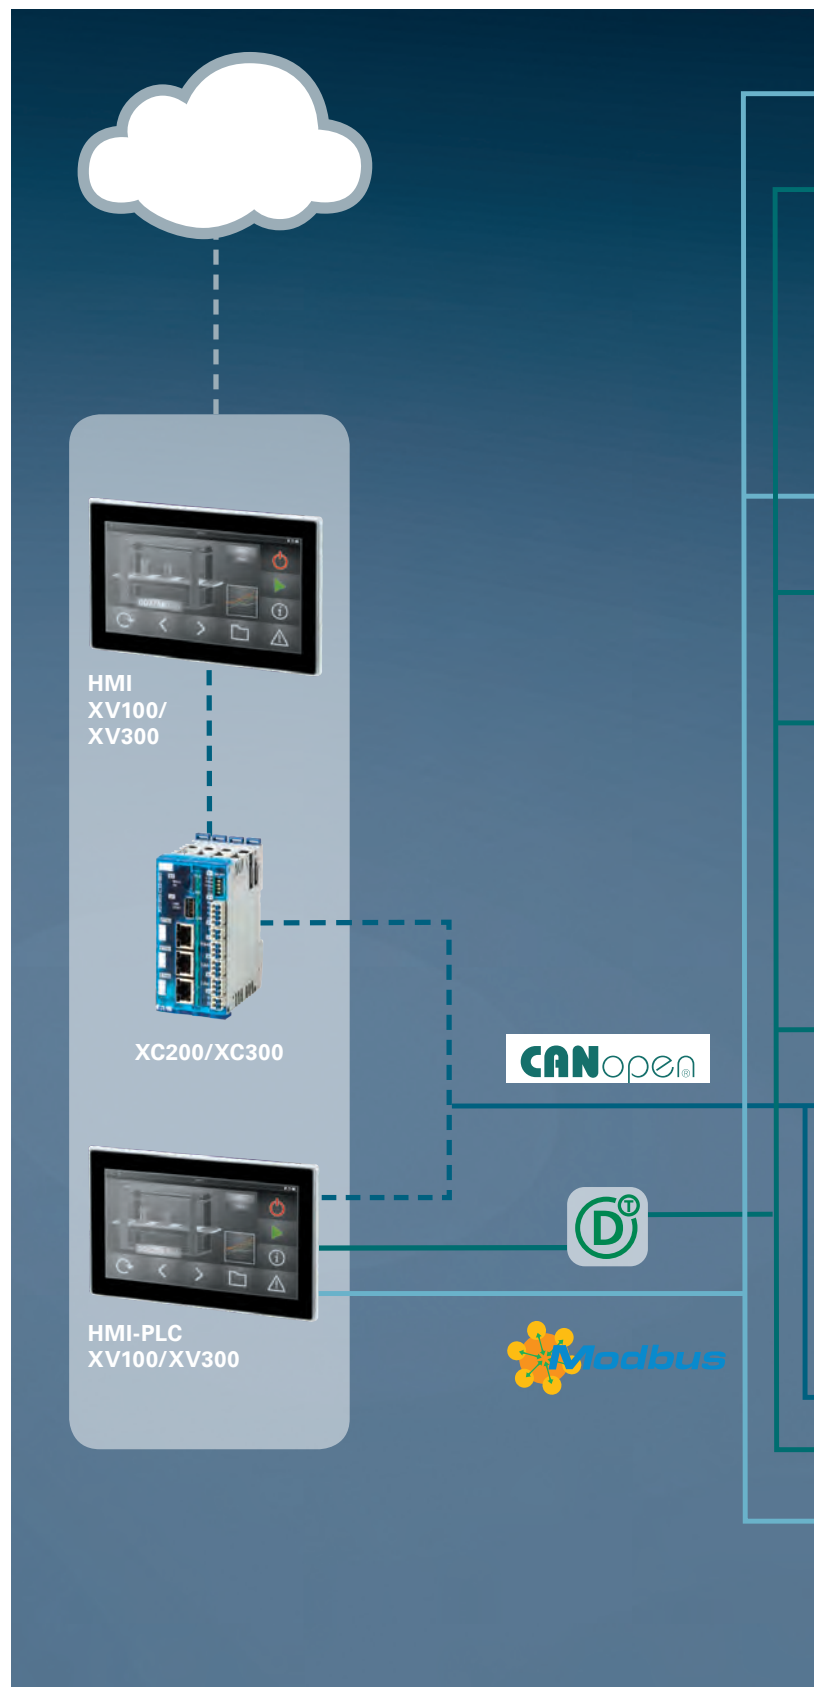

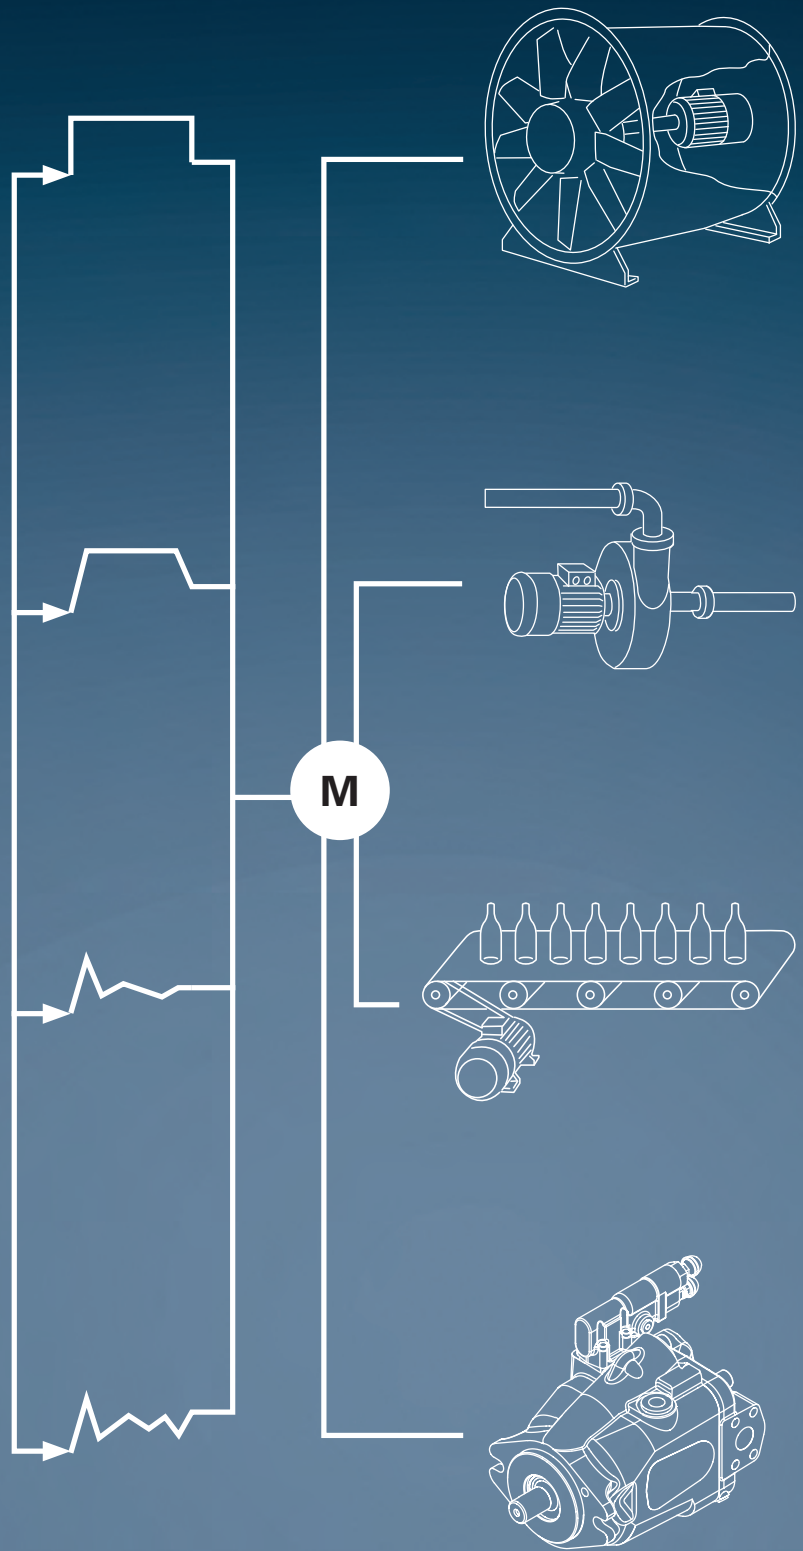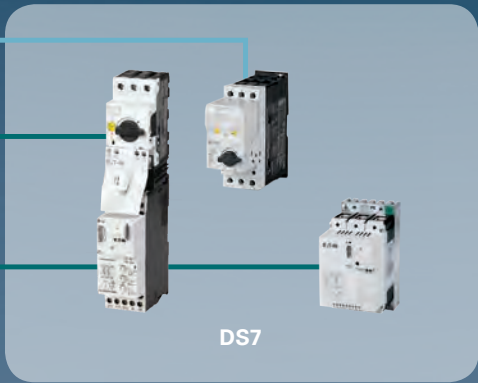





Energy savings of 15 % for the pumping station of a waterworks



When the pump system of a waterworks had to be replaced, Aquatech, an Eaton Solution Partner, developed a new drive system in cooperation with the operator. This enabled the operator to reduce its operating and maintenance costs and achieve a rapid return on investment for the system upgrade. The combination of DG1 drives with IE4 motors allows for speed-controlled operation: During start-up, the pumping capacity increases only gradually.

Thereby avoiding the voltage peaks and pressure surges that often plagued the old system. In fact, this has enabled the waterworks to entirely eliminate gate valves during start-up. With the new system, sudden pressure changes in the water mains are also a thing of the past – thanks to the variable frequency drives, which gradually reduce the power output of the pumps. As a result, the non-return valves now close in a much more gentle manner, which translates into less wear on the equipment.

Variable frequency drives product overview

 <p>DE1/DE11 Machinery Micro</p>	 <p>DC1 Machinery Compact</p>	 <p>DB1 OEM Cold Plate</p>	 <p>DA1 Machinery Advanced</p>
<ul style="list-style-type: none"> Automatic doors and barriers Drilling machines, milling machines Airlocks, industrial washing machines DC1: Dezentralized applications (IP66) Pumps, low-power fans Conveyor belts, treadmills 		<ul style="list-style-type: none"> Mobile pumps Motor-mounted compressors Gas burners 	<ul style="list-style-type: none"> Extruders, compressors Crane and lifting equipment Tunneling machines, draw benches Crushers, mixers, stirrers Dezentralized applications (IP66)
<ul style="list-style-type: none"> V/f Control mode 	<ul style="list-style-type: none"> V/f Control mode Sensorless vector control (SLV) Permanent magnet, synchronous reluctance, and brushless DC motors 		<ul style="list-style-type: none"> V/f Control mode Sensorless vector control (SLV) Closed-loop vector control (CLV) Permanent magnet, synchronous reluctance and brushless DC motors
<p>DE11:</p> <ul style="list-style-type: none"> Plug-in terminals Configurable relay output PTC/EX: Option EMT6 	<ul style="list-style-type: none"> Brake Chopper optional PTC/EX: Option EMT6 		<ul style="list-style-type: none"> Standard + internal PLC Brake Chopper STO (SIL2/3, PL d/e) PTC/EX: Option EMT6
<p>Digital Inputs 3 (4)</p> <p>Analog inputs 1 (1)</p> <p>Digital Outputs 0</p> <p>Analog Outputs 0</p> <p>Relay outputs 1</p> <p>Expansion slots 1</p>	<p>Digital Inputs 3 (4)</p> <p>Analog inputs 1 (2)</p> <p>Digital Outputs 0 (1)</p> <p>Analog Outputs 1 (1)</p> <p>Relay outputs 1</p> <p>Expansion slots 1</p>		<p>Digital Inputs 4 (5+3)</p> <p>Analog inputs 1 (2)</p> <p>Digital Outputs 0 (2)</p> <p>Analog Outputs 2 (2)</p> <p>Relay outputs 2</p> <p>Expansion slots 1</p>
<p>0.25 - 2.2 kW (1~ 230 V/3~ 230 V)</p> <p>0.37 - 7.5 kW (3~ 400 V/3~ 400 V)</p>	<p>0.37 - 0.55 kW (1~ 115 V/1~ 115 V)</p> <p>0.37 - 1.1 kW (1~ 115 V/3~ 230 V)</p> <p>0.37 - 1.1 kW (1~ 230 V/1~ 230 V)</p> <p>0.37 - 4 kW (1~ 230 V/3~ 230 V)</p> <p>0.37 - 11 kW (3~ 230 V/3~ 230 V)</p> <p>0.75 - 22 kW (3~ 400 V/3~ 400 V)</p>	<p>0.37 - 1.5 kW (1~ 230 V/3~ 230 V)</p> <p>0.75 - 4.0 kW (3~ 400 V/3~ 400 V)</p>	<p>0.75 - 2.2 kW (1~ 230 V/3~ 230 V)</p> <p>0.75 - 75 kW (3~ 230 V/3~ 230 V)</p> <p>0.75 - 160 kW (3~ 400 V/3~ 400 V)</p> <p>0.75 - 110 kW (3~ 575 V/3~ 575 V)</p>
<p>drivesConnect & drivesConnect mobile App</p>			

Rapid Link product overview

 <p>RAM05 Decentralized motor starter</p>	 <p>RASP5 Decentralized variable frequency drive</p>
<ul style="list-style-type: none"> Conveyor belts with constant speed 	<ul style="list-style-type: none"> Roller and belt conveyors Chain conveyors
<ul style="list-style-type: none"> Quick Stop 	<ul style="list-style-type: none"> Electronic reversing start (DOL and reversing starter)
<ul style="list-style-type: none"> 2/4 sensor inputs, 2 outputs Manual/automatic mode 	<ul style="list-style-type: none"> Configurable motor protection / thermistor protection Special material handling equipment functions
<ul style="list-style-type: none"> 0.09 - 3.0 kW (400 V AC) 	<ul style="list-style-type: none"> 0.75 - 4.0 kW (400 V AC)
<p>drivesConnect & drivesConnect mobile App</p>	

**DM1
General
Purpose
Micro**



**DM1 Pro
General
Purpose
Compact**



**DG1
General
Purpose**



**DX1
High
performance**



- Pumps, fans
- Compressors
- HVAC
- Mills, crushers, presses
- Conveyor belts

- V/f Control mode

- V/f Control mode
- Sensorless vector control (SLV)
- Permanent magnet motors

- V/f Control mode
- Sensorless vector control (SLV)
- Torque control (SLV)
- Permanent magnet motors

- Machinery
- Flying cutter
- Winder/Unwinder
- Crane/Hoist
- Printing machines
- Mills
- Mixer
- Crushers
- Presses
- Conveyor belts
- Permanent magnet motors
- Synchronous reluctance motors
- Hybrid synchronous reluctance motors

- Multi-drive / multi-pump
- Brake Chopper
- PTC/EX: Option EMT6

- Multi-drive / multi-pump, web server
- Brake Chopper
- STO: SIL 2, PL d, Cat. 3
- PTC/EX: Option EMT6
- Logic Engine

- Multi-drive / multi-pump, RTC, web server
- Brake Chopper on-board (≥ 61 A optional)
- STO: SIL 1, PL c, Cat. 1
- PTC/EX: Option EMT6
- Logic Engine

- Speed control, RTC
- Master-Follower, Torque control
- STO: SIL3 PLc Cat.4 10 additional safety features (optional)
- User Access Control
- Full-color touchscreen keypad
- Logic Engine EN61131
- Cyber security to IEC/EN 62443
- PTC / EX: Option EMT6

Digital Inputs	4
Analog inputs	1
Digital Outputs	0
Analog Outputs	1
Relay outputs	1
Expansion slots	0

Digital Inputs	4
Analog inputs	1
Digital Outputs	0
Analog Outputs	1
Relay outputs	2
Expansion slots	1

Digital inputs	8 (+12)
Analog inputs	2 (+2)
Digital outputs	1 (+6)
Analog outputs	2 (+4)
Relay outputs	3 (+6)
Expansion slots	2

Digital inputs	6 (+24)
Analog inputs	2 (+4)
Digital outputs	1 (+12)
Analog outputs	2 (+8)
Relay outputs	2 (+12)
Expansion slots	4

- 0.18 - 15 kW (3~ 230 V/3~ 230 V)
- 0.37 - 22 kW (3~ 400 V/3~ 400 V)
- 5 - 25 HP (3~ 575 V/3~ 575 V)

- 0.18 - 1.5 kW (1~ 115 V/3~ 230 V)
- 0.18 - 5.5 kW (1~ 230 V/3~ 230 V)
- 0.18 - 15 kW (3~ 230 V/3~ 230 V)
- 0.37 - 22 kW (3~ 400 V/3~ 400 V)
- 5 - 25 HP (3~ 575 V/3~ 575 V)

- 0.75 - 90 kW (3~ 230 V/3~ 230 V)
- 0.75 - 630 kW (3~ 400 V/3~ 400 V)
- 2.2 - 750 HP (3~ 575 V/3~ 575 V)

- 0.75 - 90 kW (3~ 230 V/3~ 230 V)
- 0.75 - 160 kW (3~ 400 V/3~ 400 V)
- 2.2 - 250 HP (3~ 575 V/3~ 575 V)

PowerXpert inControl

Soft starter product overview

**DS7
Industrial Micro**



**S711
Industrial
General
Purpose**



**S811+
Industrial
General
Purpose**



- Pumps
- Fans
- Treadmills
- Compressors
- Conveyors
- 2-phase control
- SmartWire-DT
- Enhanced diagnostics
- Control voltage: 24 V AC/DC / 110 - 230 V AC
- 1.5 - 110 kW (200 - 480 V AC)

- Pumps, Fans
- Compressors
- Conveyors
- Travelator
- 3-phase control
- Cybersecurity
- Enhanced diagnostics
- Control voltage: 24 V DC / 110 - 250 V AC
- Pumping algorithms
- 3 - 225 kW (200 - 600 V AC)
- Mixers, mills
- Crusher plants
- Buzz / band saws
- Integrated bypass
- In-Delta connection

- Pumps, Fans
- Compressors
- Conveyors
- Travelator
- 3-phase control
- Integrated bypass
- Control voltage: 24 V DC
- Dedicated pumping algorithms
- 7.5 - 450 kW (200 - 600 V AC)
- 160 - 710 kW (690 V AC)
- Mixers, mills
- Crusher plants
- Buzz / band saws
- In-Delta connection



Pumps and fans



Material handling






Compressors




Machines

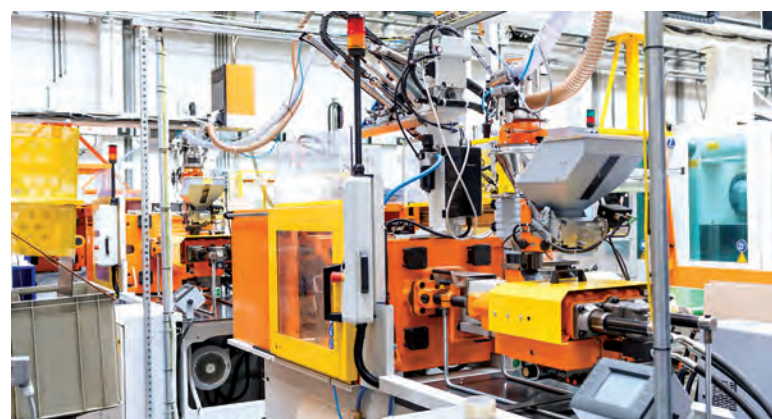

drivesConnect – The Software for optimal implementation.


The drivesConnect software and the drivesConnect mobile smartphone app are powerful commissioning tools for PowerXL DE1, DC1, DA1, DB1 variable frequency drives and the Rapid Link 5 electronic drive system. Beside parameterization and diagnosis user-defined internal logic links can be set up through the function block editor and transferred to the variable frequency drives.

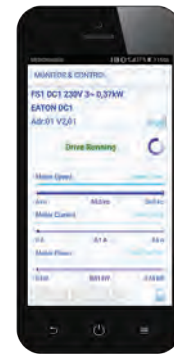

Android/iOS
drivesConnect
Mobile App

Parameter Editor

The parameterization function has an uncluttered, easy to understand user interface. With the editor variable frequency drives can be parameterized both online and offline. In online mode monitor values can be used for diagnostics.

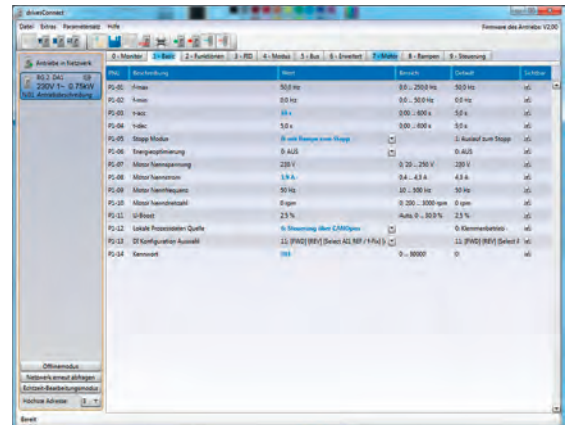


Parameter-Editor starting screen

Drive control/monitor

The drive control/monitor function makes it possible to easily run connected variable frequency drives with the use of software. This not only means that individual drive functions can be quickly accessed, but also that devices can be easily activated and deactivated.

Scope/Data Logger

The scope/data logger can be used to graphically show up to four selected variable frequency drive parameters as curves. This ensures that the behavior of display values such as motor voltage and motor current during ongoing operation can be tracked directly – and even recorded.

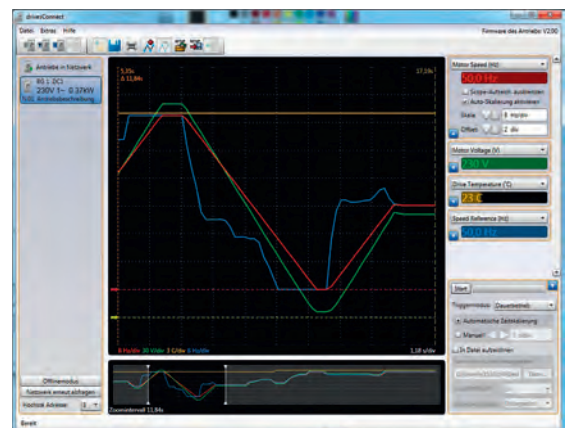


Display showing recorded signals

Function block editor

Together with the DA1 variable frequency drive, the Function Block Editor provides the option of using PLC programming to create separate logic operations – with time dependencies, for example – within the variable frequency drive. In fact, using the blocks from the “Inputs/Outputs,” “Logic Functions,” “Arithmetic,” “Comparators,” “Timers,” “Counters,” “Data Handling,” and “Drive Functions” function groups makes it possible to generate your own applications within the Editor.

By simulating the PLC program, invalid blocks can be identified as errors and corrected directly. This makes it possible to adapt the variable frequency drive to any application, cutting down on additional hardware costs in the process.

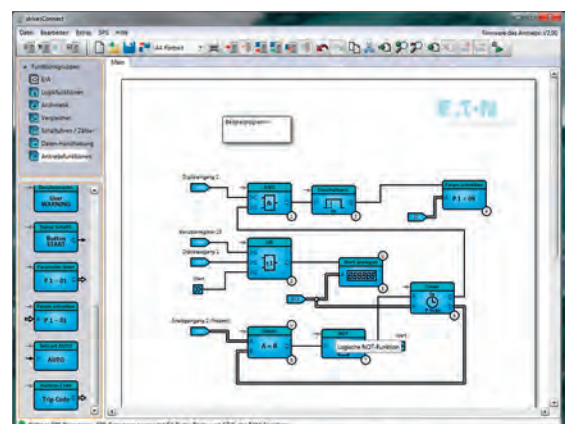

Example of visualization with various function blocks

Download:

Eaton.com/drivesconnect

Online installation:

www.drive-support-studio.com/OTS/Eaton/downloads/deploy/drivesConnect.htm

Communications stick

Easily transfer parameter configurations

The “DX-COM-STICK3” communications stick makes it possible to quickly and easily transfer parameters from your laptop to PowerXL variable frequency drives using Bluetooth. In addition, the stick can be used to establish a connection to the drivesConnect mobile smartphone app. The convenience of this feature is only matched by the stick’s copy function, which can be used to transfer parameter sets from one variable frequency drive to another. This makes the stick a perfect little helper – especially when it comes to mass production operations.




Additional PC tools

Selection aid

Simple planning and engineering

An electronic selection aid provides simple planning, helping you quickly select the drive required for your application and the associated switchgear, protective elements, chokes, and filters complete with the corresponding article number.

Eaton.com/drives-configurator

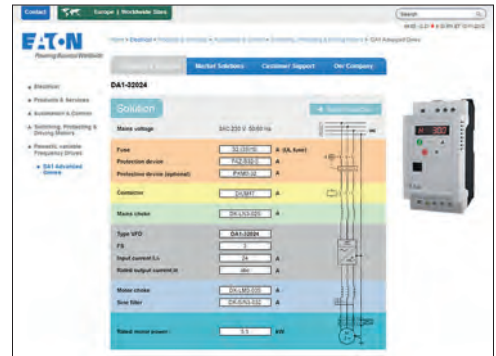

Energy savings estimator

A few steps are all it takes to determine your energy needs and save big


The “Energy Savings Estimator” is a program that calculates the estimated energy needed for applications involving fans and/or pumps. After entering your project information, you will get an estimate of the energy savings and payback time that can be achieved when using variable frequency drives instead of conventional speed controllers.

Eaton.com/energysavingsestimator



Power Xpert inControl – The Eaton platform that makes configuring parameters a cinch.

The Power Xpert inControl computer program is a powerful commissioning tool for PowerXL DG1, DM1 and DX1 variable frequency drives. In addition to its parameter configuration and diagnostic functionalities, it can be used to configure and view the internal oscilloscope featured by DG1 or DX1 devices, making it possible to obtain plots for up to eight channels using 10 ms intervals. Moreover, Power Xpert inControl is not a platform for DG1 or DX1 variable frequency drives exclusively, but instead will be used for all future Eaton devices with communication capabilities as well.

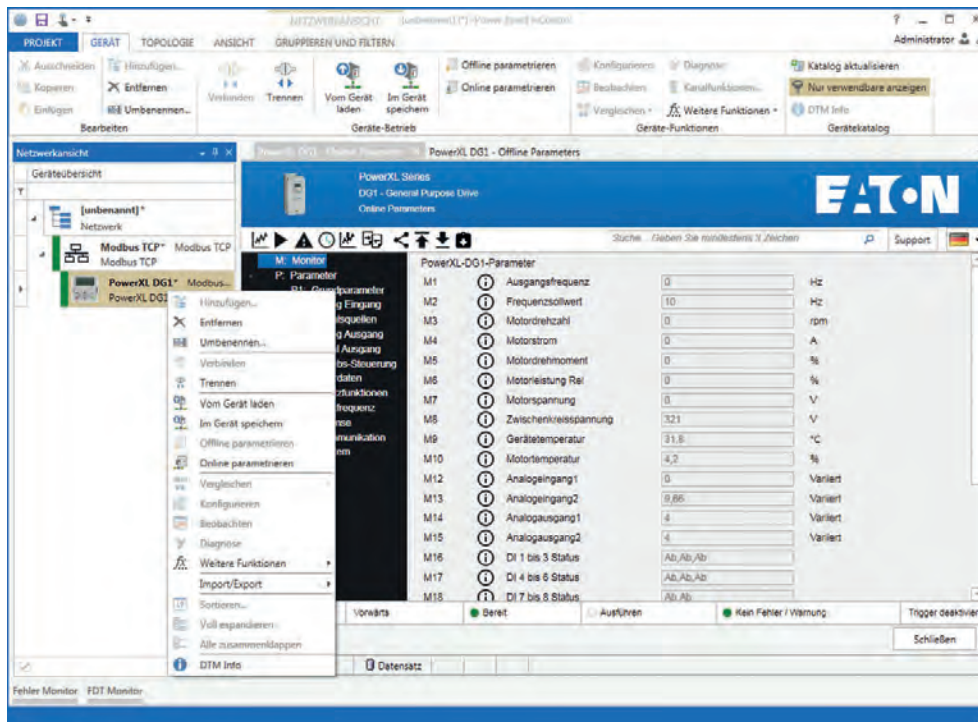

Serial or Ethernet

The connection to a computer can be established either with a serial RS485 connection or via Ethernet. DG1 and DX1 units feature hardware ports for both of these options, and Power Xpert inControl has drivers for both interfaces. In other words, the choice is up to you.

Parameterization

Online and offline

The parameterization function has an uncluttered, easy to understand user interface. With the editor variable frequency drives can be parameterized both online and offline. In online mode monitor values can be used for diagnostics.



Internal DG1 and DX1 oscilloscope

Faster analysis with 10 ms intervals


Together with Power Xpert inControl, DG1 and DX1 devices can be used to plot up to 8 signals at the same time. However, most serial connections to a computer only allow for data to be sampled at relatively large time intervals, which is why DG1 and DX1 units feature an integrated 8 channel oscilloscope as well. This oscilloscope makes it possible to analyze faster processes with plots using 10 ms as the time interval, and Power Xpert inControl provides comprehensive options for configuring the oscilloscope and selecting trigger signals.



Compare and document data sets

Online and offline

The comparison function enables DG1 as well as DX1 devices to compare their parameters to another data set quickly and easily. Likewise, data can be quickly and easily entered in a spreadsheet program and filtered to see changed/different parameters – regardless of whether the comparison data comes from a different device in the system or from a saved or default data set. This provides an optimal way of reliably documenting all changes without having to go through every single parameter one at a time.

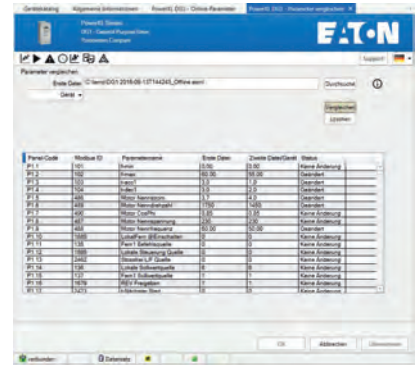


Exceptional memory

Track changes easily

Made some changes by accident? Do you need to figure out why your drive won't start anymore all of a sudden?

This is where the DG1's and DX1's abilities to save the last 100 parameter change, together with a timestamp, comes in handy. Power Xpert inControl can read and show these changes, making it easy to undo undesirable changes.

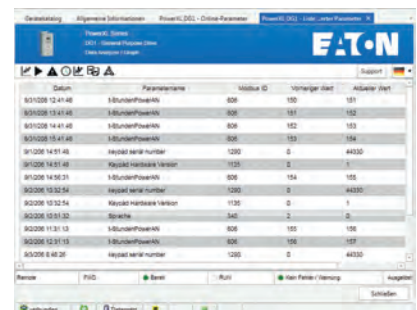

PC-connection

Cable (Modbus RTU):

By using a wired USB connection, up to 63 variable frequency drives can be connected to a PC via Modbus RTU. The software can then be used to conveniently configure their parameters.

Cable (Modbus TCP):

By using a wired Ethernet connection, virtually any number of variable frequency drives can be connected to a PC via Modbus TCP. The software can then be used to conveniently configure their parameters.

Wireless via WLAN:

An external WLAN gateway can be used to integrate the DG1 and the DX1 into industrial wireless networks. The connection to the actual drive is established with an Ethernet connection in this case. When using this type of connection, inControl will work as though it were directly connected to the corresponding drive, and remote diagnostics will work smoothly as always.

S711 Connect App & Communication

The S711 Connect is designed to optimize how industrial customers manage and optimize their daily workflow. The S711 Connect stands out with its robust design and advanced features, ensuring your operations run smoothly and efficiently. This intuitive and compact app is engineered to provide high-speed data transfer with minimal latency over Bluetooth Low Energy, making it an indispensable tool for modern industrial environments.




Efficient and reliable solution

The S711 Connect app is tailored for industrial customers, including managers, IT professionals, and engineers who seek a reliable and efficient solution to enhance their network infrastructure. This is the perfect choice for those looking to streamline their operations and achieve greater efficiency. Choosing the S711 soft starter means investing in the future of your business. With its advanced features and smart design, this device offers a reliable and efficient solution that meets the demands of modern industrial environments.

Eaton.com/s711app



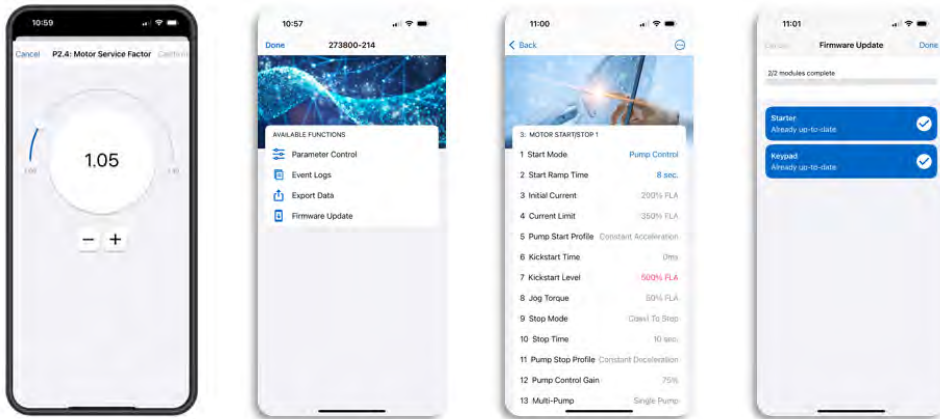

Key features



Configuration of parameters via app

The S711 Connect offers an intuitive app available on both Android and iOS platforms, allowing users to configure parameters effortlessly.



Data analysis

Efficiently read and filter data logs to gain valuable insights into your operations. This feature helps in monitoring performance and identifying areas for improvement.



Easy storage and backup

With the S711 Connect, storing and backing up parameters can be done easily. Whether you prefer local storage or cloud solutions, this app has you covered, ensuring your data is always secure and accessible.



Convenient download

Download configurations and logs as ZIP packages for easy storage or sharing with support teams. This functionality ensures that you can quickly access and distribute critical information when needed.



Effortless machine management

Managing different machine configurations has never been easier. The S711 Connect allows you to handle multiple setups with ease, providing flexibility and control over your operations.



Easy firmware updates

Keep your soft starter firmware up-to-date with fast and easy updates via the app. This ensures that your system is always running the latest software, enhancing performance and security.

S711 Select tool: Selection made easy

S711 Select is dedicated PC software designed to simplify the process of choosing the perfect soft starter for your application. Just enter your application parameters, and S711 Select will recommend the ideal model tailored to your needs. The tool calculates the maximum Full Load Amps (FLA) for your selected model, ensuring optimal performance and compatibility. With S711 Select, complex calculations become effortless, making it easy and accurate to find the right solution for your application.

Eaton.com/s711





DS7 soft starters

Soft to start, powerful in torque

Soft starters have become a well-established alternative to the star-delta starter. This is where the DS7, featuring two-phase control and designed to work seamlessly with DILM and PKZ switchgear, comes in. It can be flexibly combined with other units and adds the ability to “start motors softly” to the switching, protection, and starting functions common to control panels.

A patented method ensures that motor run-ups will be exceptionally soft while providing a higher torque than other available solutions.

Performance range:

- 4 - 200 A
- 1.10 - 110 kW (U_e : 200 - 480 V)

Applications:

- Conveyor belts
- Fans
- Pumping
- Cooling compressors

Designed for normal applications such as pumps, fans and small conveyors, the compact DS7 soft starter is ideal.

The DS7 is also available with a SmartWire-DT connection to simplify wiring and enhance functionality as an automation solution.

Features:

- Ramp time in a range of 1 to 30 s (for starting) or 0 to 30 s (for stopping)
- Starting voltage in the range from 30 % to 100 % of the mains voltage
- Control voltages: 24 V AC/DC, 110 V AC or SmartWire-DT
- The thermal load on the engine is lower thanks to asymmetric ignition control
- Ambient temperature -40 °C to 60 °C

Accessory:

- Three-phase commoning links
- Terminal cover
- Feeder unit
- IP2X protection against contact with a finger
- Device fans
- Mounting kit


For more information, visit:
Eaton.com/ds7



1.1 DS7 soft starters

System overview	16
DS7 system overview < 32 A	16
DS7 system overview > 32 A	18
Key to type references	19
Description	20
Ordering	21
Basic devices	21
Accessories	22
Engineering	26
General information on engineering	26
Design with different load cycles	28
Connection examples	30
Assigned switching and protective elements for DS7	32
Technical specifications	33
Dimensions and weights	35

System overview

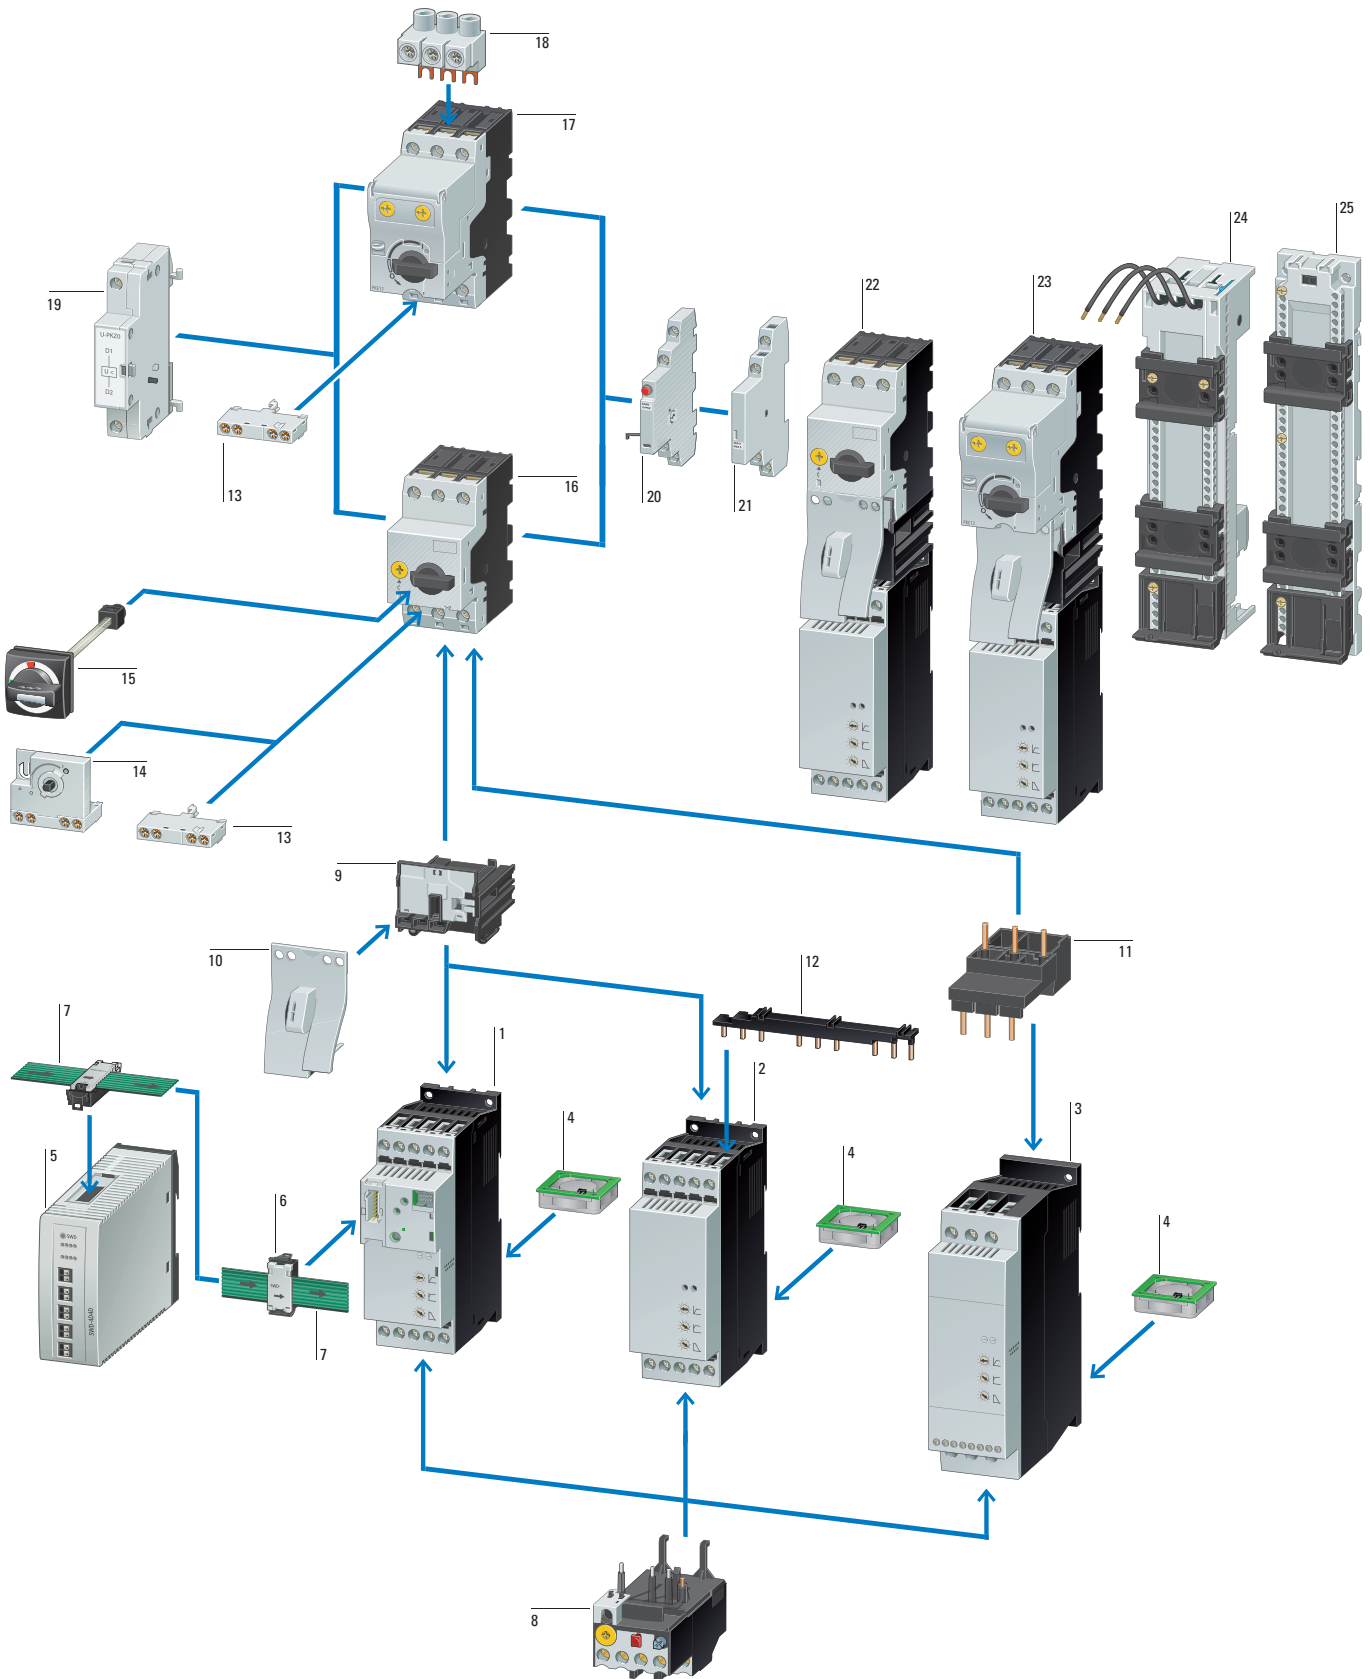


DS7 soft starters with SmartWire-DT 1 → Page 21	PKZM0-XDM wiring set in tool-less plug connection 9 → Page 23	Connection clamp 18 → Page 24
DS7 soft starters in frame size 1 for assigned motor current up to 12 A 2 → Page 21	PKZM0-XM wiring set 11 → Page 23	Voltage release 19 → Catalog "Solutions for machinery and systems"
DS7 soft starters in frame size 2 for assigned motor current up to 32 A 3 → Page 21	Three-phase commoning link 12 → Page 24	Trip indicator 20 → Catalog "Solutions for machinery and systems"
DS7-FAN-32 device fan 4 → Page 25	Standard auxiliary contact 13 → Catalog "Solutions for machinery and systems"	Standard auxiliary contact 21 → Catalog "Solutions for machinery and systems"
SmartWire-DT gateway 5 → Catalog "Solutions for machinery and systems"	Early-make auxiliary contact 14 → Catalog "Solutions for machinery and systems"	Motor-starter combination with PKZ 22 → Catalog "Solutions for machinery and systems"
SmartWire-DT external device plug 6 → Catalog "Solutions for machinery and systems"	Door coupling handle 15 → Catalog "Solutions for machinery and systems"	Motor-starter combination with PKE 23 → Catalog "Solutions for machinery and systems"
SmartWire-DT flat band conductor 7 → Catalog "Solutions for machinery and systems"	Motor Protective Circuit Breakers PKZM0 16 → Catalog "Solutions for machinery and systems"	Busbar adapter 24 → Page 23
Overload relay 8 → Page 23	Motor Protective Circuit Breakers PKE 17 → Catalog "Solutions for machinery and systems"	Top-hat rail adapter 25 → Page 23

1.1

DS7 soft starters


DS7 > 32 A system overview

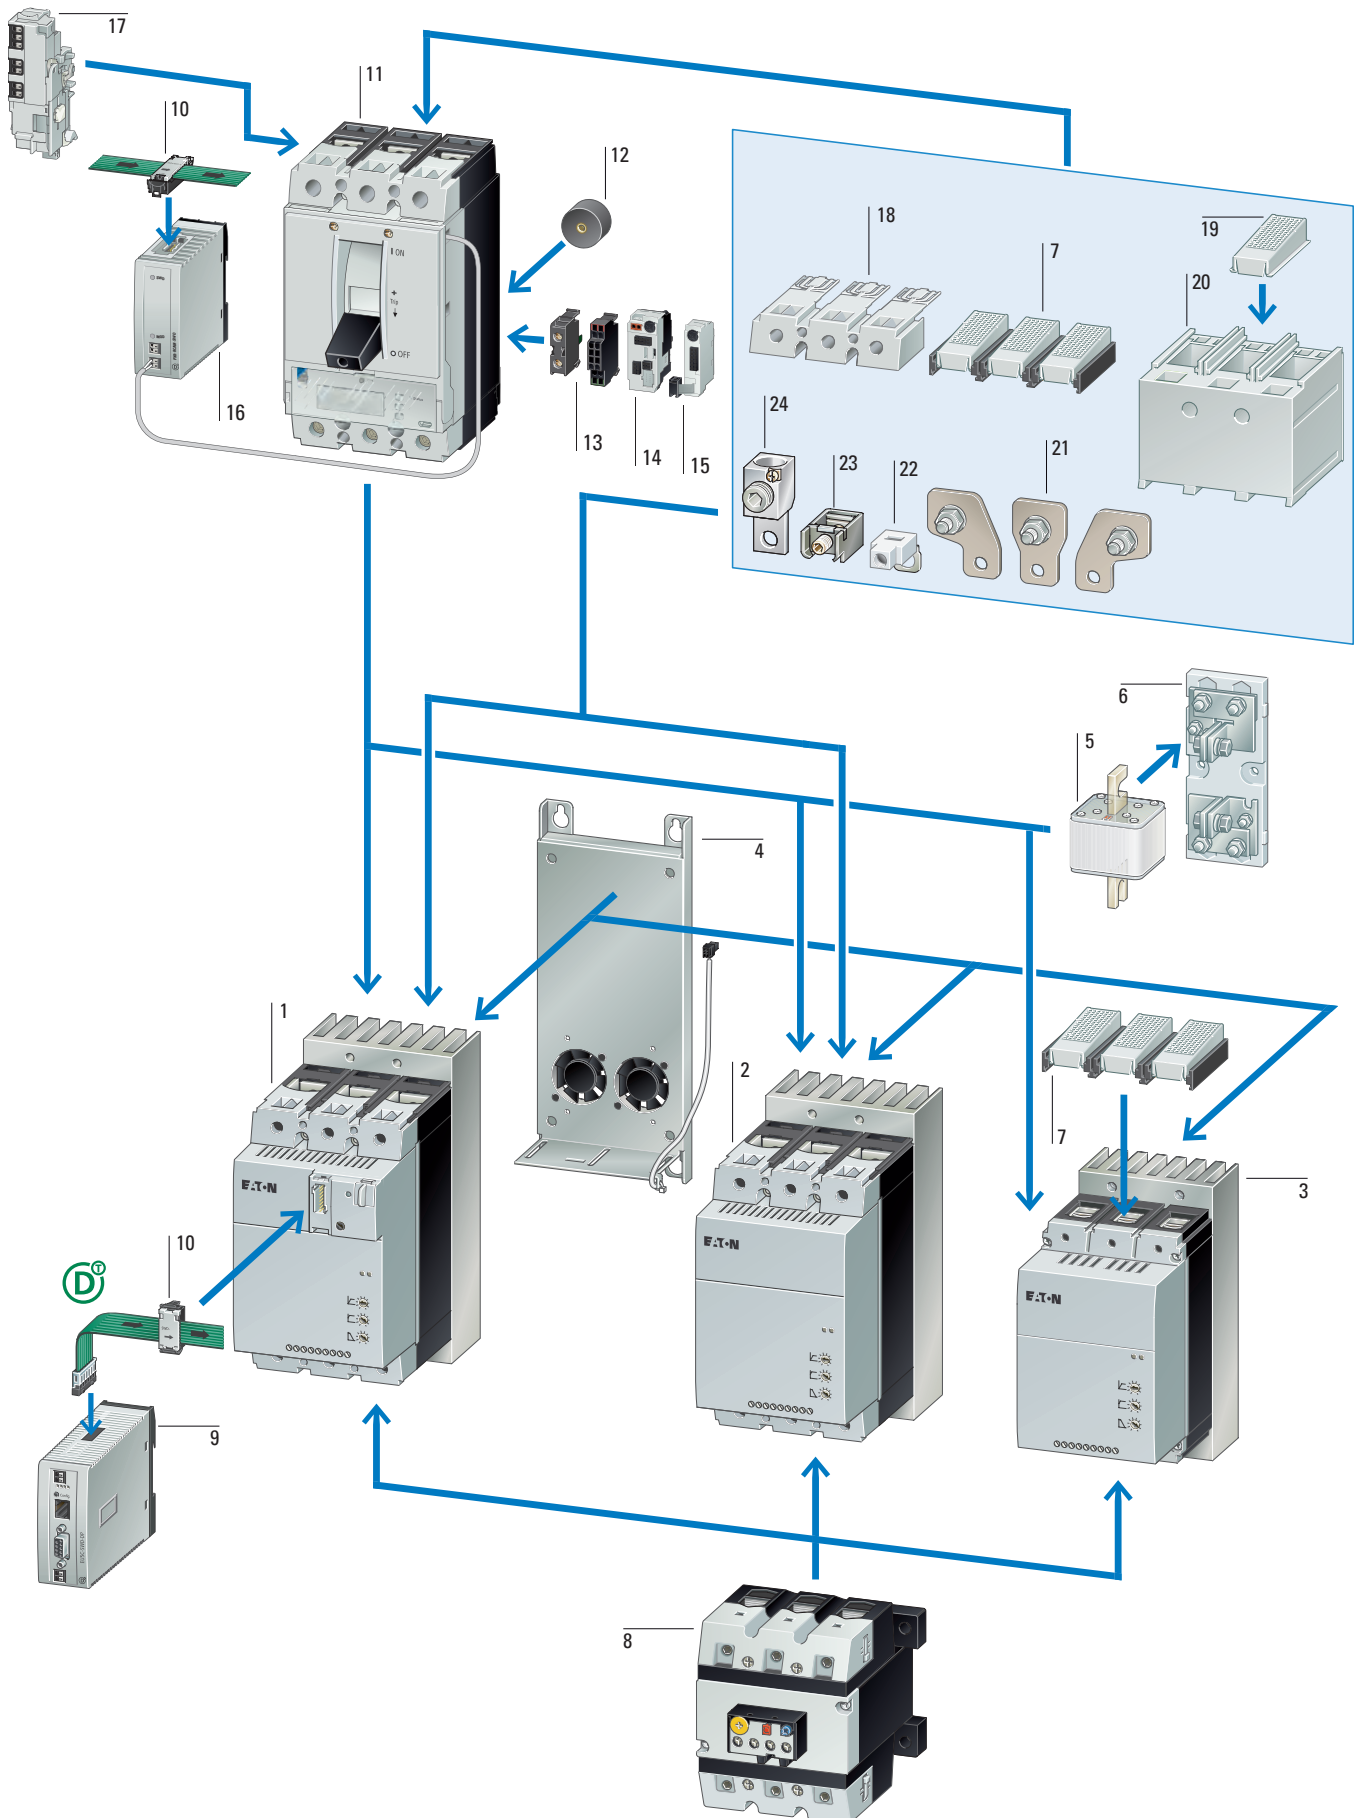

DS7 system overview > 32 A, catalog number selection

DS7 with SmartWire-DT 1 → Page 21	SmartWire-DT external device plug 10 → Catalog "Solutions for machinery and systems"	Voltage release/Early-make auxiliary contact 17 → Catalog "Solutions for machinery and systems"
DS7 size 4 up to 200 A 2 → Page 21	NZM circuit breakers 11 → Catalog "Solutions for machinery and systems"	Terminal cover for terminals 18 → Page 24
DS7 size 3 up to 100 A 3 → Page 21	Spacer 12 → Catalog "Solutions for machinery and systems"	IP2X protection against contact with a finger 19 → Page 25
Device fans 4 → Page 25	Standard auxiliary contact, Tripindicating auxiliary switch 13 → Catalog "Solutions for machinery and systems"	Terminal cover for cable lugs 20 → Page 24
Superfast semiconductor fuses 5 → Page 22	BSM interface module 14 → Catalog "Solutions for machinery and systems"	Connection width extension 21 → Catalog "Solutions for machinery and systems"
Fuse bases for superfast semiconductor fuses 6 → Page 22	Interface communication module for Modbus RTU 15 → Catalog "Solutions for machinery and systems"	Control circuit terminal 22 → Catalog "Solutions for machinery and systems"
IP2X protection against contact with a finger 7 → Page 25	NZM communication module for SmartWire-DT 16 → Catalog "Solutions for machinery and systems"	Frame clamps 23 → Catalog "Solutions for machinery and systems"
Overload relay 8 → Page 23		Tunnel terminals for Al and Cu cable 24 → Catalog "Solutions for machinery and systems"
Gateways for SmartWire-DT 9 → Catalog "Solutions for machinery and systems"		

Key to type references

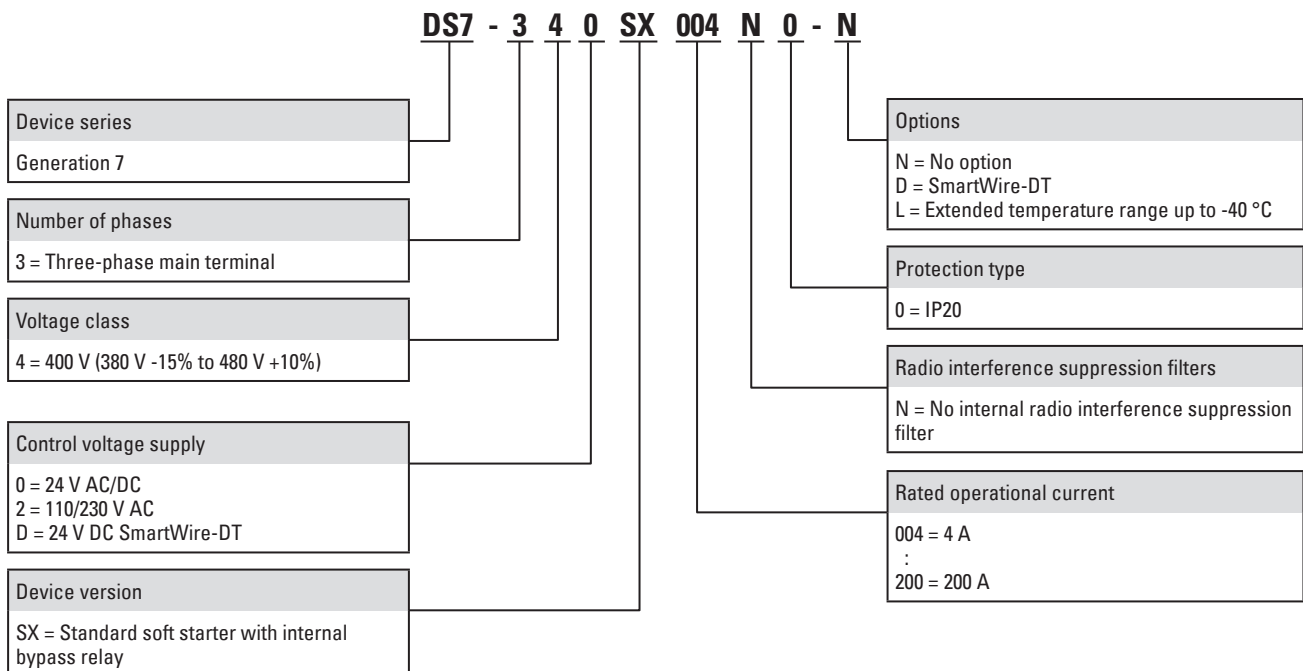

Description



Application

DS7 soft starters are two-phase control soft starters used to soft start three-phase AC motors in applications with a normal operating frequency and a current range of 3 to 200 A (1.1 to 110 kW with a 400 V supply voltage). Closing transients and DC components during startup are effectively suppressed and guarantee even motor starting. The special control method (asymmetrical firing control) for the soft start function avoids the DC components (Eaton patent) that are normally produced by two-phase control soft starters. This prevents the formation of an elliptically rotating field, which would otherwise result in the motor not accelerating smoothly and increase starting times unnecessarily. Accordingly, the smooth starting provided by DS7 soft starters is comparable to that provided by three-phase control soft starters.

Functions

Typical fields of application for the DS7 soft starters series are:

- Pump drives: pressure surges are prevented through soft starting reducing mechanical loads on the entire system and lengthening its life.
- Fan drives: soft starting keeps fan belts from slipping, preventing premature wear. This not only lowers operating costs, but also extends the corresponding system's life.
- Conveyor belts: conveyor belts start running smoothly, instead of starting with a jolt. This ensures that any goods being conveyed will not topple over. In addition, it prevents mechanical damage to the belt itself, making it last longer.

Features

- The ramp time can be adjusted by potentiometer within a range of 1 to 30 s (for starting) or 0 to 30 s (for stopping) with a potentiometer
- The start voltage (or start torque) can be adjusted within a range of 30 to 100 percent of the mains voltage with a potentiometer
- Significant reduction in switch-on current, achieved with a short soft start ramp time (min. 1 s) for lamp and heating loads
- Internal bypass relay: switches on automatically after the end of the ramp, bypassing the internal thyristors.
- This makes it possible to comply with radio interference level B without any additional measures.
- The motor's thermal load is smaller than it would be without asymmetric ignition control.
- Designed specifically for long cables

Documentation

Surface mounting and standard mounting procedures are described in the corresponding instruction leaflets and in the manual.

Instruction leaflets:
 IL03902003Z: for size 1 devices (up to 12 A motor output)
 IL03902004Z: for size 2 devices (up to 32 A motor output)
 IL03902005Z: for size 3, 4 devices (up to 200 A motor output)

Manual:
 MN03901001Z

You can download the documentation for the DS7 soft starters at: Eaton.com/documentation

Communication interface SmartWire-DT

The use of a SmartWire-DT interface completely eliminates the need for conventional control wiring. This has several advantages:

- No incorrect wiring
- Faster wiring
- Cost saving

The interface can be used to send control commands to a DS7-SWD device and modify and diagnose the latter's parameter configuration; in addition, the control electronics can be powered via the SmartWire-DT cable.

The device is controlled with one of three selectable profiles:

- A "start/stop" profile, which should already be familiar from the PKE motor protective circuit breaker and contactor combination
- An 8 bit-wide profile for the soft starter, which is provided the same way for the variable frequency drive and features more options
- A control profile comparable to a Profidrive profile, just like the one available for the variable frequency drive.

Regardless of the profile chosen, a DS7-SWD device's parameters can be read and written to at any time by using acyclical services.

DS7-SWD devices make it possible to read and write to all device parameters. The mechanisms of the parameter channel that is described for the drives in the Profidrive profile are used for this purpose. This profile provides a standardized parameter access method for variable frequency drives and soft starters.

It is also possible to overwrite the potentiometer settings on the DS7-SWD, which can come in handy, for instance, when a change made to the machine needs to be undone.

DS7-SWD devices come with a detailed diagnostic system with options that extend far beyond those of wired devices. In addition to having an error log, DS7-SWD devices can detect and report nine different device faults. A warning parameter is used to report any alarm messages present. Moreover, the response to each individual fault can be customized. Finally, there are 35 additional messages for communication errors. Using a DS7 in connection with a PKE opens up new functionalities that were previously thought impossible to implement with a low-cost soft starter and that were reserved to significantly more expensive devices. Combining a PKE unit and a DS7-SWD makes it possible to completely protect the DS7-SWD device against overloads. In addition, it provides a current limiting function and can be used to report thermal loads to higher-level controllers.

Extended temperature range


DS7-340SX...-L soft starters can operate at temperatures as low as -40 °C.


Ordering

Rated operational current	Assigned motor output		Model code	Catalog number	Model code	Catalog number	Std. pack
Device (AC-53)	at 400 V, 50 Hz	at 460 V, 60 Hz					
I_b	P	P					


Soft starters

Soft starters for three-phase loads
Mains supply voltage (50/60 Hz)
 U_{LN} 200 - 480 V AC


			U_c 24 V AC/DC U_s 24 V AC/DC Standard temperature range				U_c 24 V AC/DC U_s 24 V AC/DC Expanded temperature range down to -40 °C
4	1.5	2	DS7-340SX004N0-N	134847	DS7-340SX004N0-L	171740	1 unit
7	3	5	DS7-340SX007N0-N	134849	DS7-340SX007N0-L	171741	
9	4	5	DS7-340SX009N0-N	134910	DS7-340SX009N0-L	171742	
12	5.5	10	DS7-340SX012N0-N	134911	DS7-340SX012N0-L	171743	
16	7.5	10	DS7-340SX016N0-N	134912	DS7-340SX016N0-L	171744	
24	11	15	DS7-340SX024N0-N	134913	DS7-340SX024N0-L	171745	
32	15	25	DS7-340SX032N0-N	134914	DS7-340SX032N0-L	171746	
41	22	30	DS7-340SX041N0-N	134916	DS7-340SX041N0-L	171747	
55	30	40	DS7-340SX055N0-N	134917	DS7-340SX055N0-L	171748	
70	37	50	DS7-340SX070N0-N	134918	DS7-340SX070N0-L	171749	
81	45	60	DS7-340SX081N0-N	134919	DS7-340SX081N0-L	171750	
100	55	75	DS7-340SX100N0-N	134920	DS7-340SX100N0-L	171751	
135	75	100	DS7-340SX135N0-N	134921	DS7-340SX135N0-L	171752	
160	90	125	DS7-340SX160N0-N	134922	DS7-340SX160N0-L	171753	
200	110	150	DS7-340SX200N0-N	134923	DS7-340SX200N0-L	171754	
			U_c 110 - 230 V AC U_s 110 - 230 V AC				U_c 24 V DC U_s 24 V DC 
4	1.5	2	DS7-342SX004N0-N	134925	DS7-34DSX004N0-D	134943	1 unit
7	3	5	DS7-342SX007N0-N	134927	DS7-34DSX007N0-D	134945	
9	4	5	DS7-342SX009N0-N	134928	DS7-34DSX009N0-D	134946	
12	5.5	10	DS7-342SX012N0-N	134929	DS7-34DSX012N0-D	134947	
16	7.5	10	DS7-342SX016N0-N	134930	DS7-34DSX016N0-D	134948	
24	11	15	DS7-342SX024N0-N	134931	DS7-34DSX024N0-D	134949	
32	15	25	DS7-342SX032N0-N	134932	DS7-34DSX032N0-D	134950	
41	22	30	DS7-342SX041N0-N	134934	DS7-34DSX041N0-D	134952	
55	30	40	DS7-342SX055N0-N	134935	DS7-34DSX055N0-D	134953	
70	37	50	DS7-342SX070N0-N	134936	DS7-34DSX070N0-D	134954	
81	45	60	DS7-342SX081N0-N	134937	DS7-34DSX081N0-D	134955	
100	55	75	DS7-342SX100N0-N	134938	DS7-34DSX100N0-D	134956	
135	75	100	DS7-342SX135N0-N	134939	DS7-34DSX135N0-D	134957	
160	90	125	DS7-342SX160N0-N	134940	DS7-34DSX160N0-D	134958	
200	110	150	DS7-342SX200N0-N	134941	DS7-34DSX200N0-D	134959	




4 - 12 A



16 - 32 A



41 - 100 A

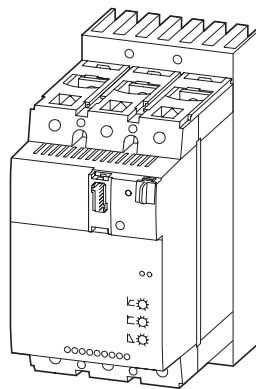

135 - 200 A

1.1


DS7 soft starters

Accessories


Nominal Current	Max. heat dissipation P_v W	Fuse body size	For use with	Catalog number	Std. pack
-----------------	-------------------------------------	----------------	--------------	----------------	-----------

Superfast semiconductor fuses

DIN 43653, 690/700 V (IEC/UL)
Pitch measure 80 mm




16	5.5	000	DS7-34...SX004N0-...	170M1359	10 units
25	9	000	DS7-34...SX007N0-...	170M1361	
32	10	000	DS7-34...SX009N0-... DS7-34...SX012N0-...	170M1362	
50	15	000	DS7-34...SX016N0-...	170M1364	
63	16	000	DS7-34...SX024N0-...	170M1365	
80	19	000	DS7-34...SX032N0-...	170M1366	
125	26	1*	DS7-34...SX041N0-... DS7-34...SX055N0-...	170M3013	
200	45	1	DS7-34...SX070N0-... DS7-34...SX081N0-... DS7-34...SX100N0-...	170M4008	
315	58	1	DS7-34...SX135N0-...	170M4010	
400	65	2	DS7-34...SX160N0-... DS7-34...SX200N0-...	170M5008	








For use with fuse body size	Catalog number	Std. pack
-----------------------------	----------------	-----------

Fuse Bases

Dimensions (W x H x D) mm 145 x 43 x 50	000, 00	170H1007	3 units
205 x 88 x 80	1*, 1, 2, 3	170H3004	



	For use with	Model code Catalog number	Std. pack
	DS7-34...SX004...	ZB12-4 278438	1 unit
	DS7-34...SX007... DS7-34...SX009...	ZB12-10 278440	
	DS7-34...SX012...	ZB12-12 278441	
	DS7-34...SX016...	ZB32-16 278452	
	DS7-34...SX024...	ZB32-24 278453	
	DS7-34...SX032...	ZB32-32 278454	
	Wiring set		
	For DOL Starter		
	DS7-34...SX004...	PKZM0-XDM12 283149	1 unit
	DS7-34...SX007... DS7-34...SX009... DS7-34...SX012...		
	Electric contact module		
	DS7-34...SX016... DS7-34...SX024... DS7-34...SX032...	PKZM0-XM32DE 239349	5 units
	Busbar adapter		
		PKZM0, PKE + DS7...004N... PKZM0, PKE + DS7...007N... PKZM0, PKE + DS7...009N... PKZM0, PKE + DS7...012N...	BBA0L-25 142526
PKZM0, PKE + DS7...016N... PKZM0, PKE + DS7...024N... PKZM0, PKE + DS7...032N...		BBA0L-32 142527	1 unit
Top-hat rail adapter			
45 mm wide adapter plate			
PKZM0, PKE + DS7...004N... PKZM0, PKE + DS7...007N... PKZM0, PKE + DS7...009N... PKZM0, PKE + DS7...012N...		PKZM0-XC45L 142529	1 unit
PKZM0, PKE + DS7...016N... PKZM0, PKE + DS7...024N... PKZM0, PKE + DS7...032N...		PKZM0-XC45L/2 142570	1 unit

For use with	Model code Catalog number	Std. pack	Notes
--------------	------------------------------	-----------	-------

Three-phase commoning links

Protected against accidental contact, short-circuit proof,
 $U_g = 690\text{ V}$, $I_g = 35\text{ A}$
 can be extended by rotating installation ($\sum I_g \leq 35\text{ A}$)



DS7-34...SX004... DS7-34...SX007... DS7-34...SX009... DS7-34...SX012...	DILM12-XDSB0/3 240084	5 units	For the primary side of DS7 Suitable for 3 DS7 soft starters Length 112 mm
--	---------------------------------	---------	--




DS7-34...SX012...	DILM12-XDSB0/4 240085		For the primary side of DS7 Suitable for 4 DS7 soft starters Length 157 mm
-------------------	---------------------------------	--	--



	DILM12-XDSB0/5 240086		For the primary side of DS7 Suitable for 5 DS7 soft starters Length 202 mm
--	---------------------------------	--	--

Feeder unit



DS7-34...SX004... DS7-34...SX007... DS7-34...SX009... DS7-34...SX012...	DILM12-XEK 240083	5 units/4	For three-phase commoning link, protected against accidental contact, $U_g = 690\text{ V}$, $I_g = 35\text{ A}$. Terminal capacity: Stranded 2.5 - 16 mm ² Flexible with ferrule 2.5 - 16 mm ² AWG14 - 8
--	-----------------------------	-----------	--

Terminal cover


Type contains parts for a terminal located at top or bottom for 3-pole circuit breakers.

**knockout
for box terminal**




DS7-34...SX041... DS7-34...SX055... DS7-34...SX070... DS7-34...SX081... DS7-34...SX100...	NZM1-XKSFA 100780	1 unit	Enhancement of the busbar tag shroud (simple protection against contact with a finger). Cannot be combined with NZM-XSTK control circuit terminal.
---	-----------------------------	--------	---

knockout



DS7-34...SX135... DS7-34...SX160... DS7-34...SX200...	NZM2-XKSFA 104640	1 unit	Enhancement of the busbar tag shroud (simple protection against contact with a finger). Protection when reaching into the cable connection area with the connection of cables in the box terminal. With two conductors max cross-section 22 mm ² or AWG4. Cannot be combined with NZM-XSTK control circuit terminal.
---	-----------------------------	--------	--



DS7-34...SX135... DS7-34...SX160... DS7-34...SX200...	NZM2-XKSA 260038	1 unit	Busbar tag shroud where cable lugs, busbars or tunnel terminals are used. When using insulated conductor material to IP1X.
---	----------------------------	--------	---

For use with	Model code Catalog number	Std. pack	Notes
--------------	------------------------------	-----------	-------

IP2X protection against contact with a finger

Type contains parts for a terminal located at top or bottom for 3-pole circuit breakers.
Enhancement of the busbar tag shroud to IP2X.

for box terminal

NZM2, PN2, N2	NZM2-XIPK 266773	1 unit	Protection when reaching into the cable connection area with the connection of cables in the box terminal. With 2 conductors max cross section 25 mm ² or AWG4. Cannot be combined with NZM-XSTK control circuit terminal.
---------------	----------------------------	--------	---

for cover NZM2-XKSA or NZM2 or NZM2...(C)NA and N(S)2...NA

NZM2, PN2, N(S)2	NZM2-XIPA 266777	1 unit	When mounting NZM2...(C)NA or NZM...-NA the following applies: with 2 conductors max cross section 25 mm ² or AWG4.
------------------	----------------------------	--------	---

Mounting kit

when using covers NZM1-XKSFA and NZM2-XKSA


DS7-34xSX041NO-x	DE6-MNT-NZM	1 unit	–
DS7-34xSX055NO-x	107323		
DS7-34xSX070NO-x			
DS7-34xSX081NO-x			
DS7-34xSX100NO-x			
DS7-34xSX135NO-x			
DS7-34xSX160NO-x			
DS7-34xSX200NO-x			

Device fans

Device fan for increasing the load cycle (more starts per hour higher or longer-lasting starting current)



DS7-34...SX004...	DS7-FAN-032	1 unit	Flush-mounted fan
DS7-34...SX007...	135553		
DS7-34...SX009...			
DS7-34...SX012...			
DS7-34...SX016...			
DS7-34...SX024...			
DS7-34...SX032...			




DS7-34...SX041...	DS7-FAN-100		Bottom fans
DS7-34...SX055...	169021		
DS7-34...SX070...			
DS7-34...SX081...			
DS7-34...SX100...			

DS7-34...SX135...	DS7-FAN-200		
DS7-34...SX160...	169022		
DS7-34...SX200...			

Communication cable PKE

6 pole
Prefabricated with two plugs
For connecting the PKE to DS7-SWD




DS7...SWD	PKE32-COM 168970	1 unit	
-----------	----------------------------	--------	--

Engineering

Generalized phase control of motor voltage

By means of generalized phase control, the soft starter adjusts the grid's voltage (U_{LN}) smoothly from an adjustable start value to 100 % of the rated value U_{LN} .

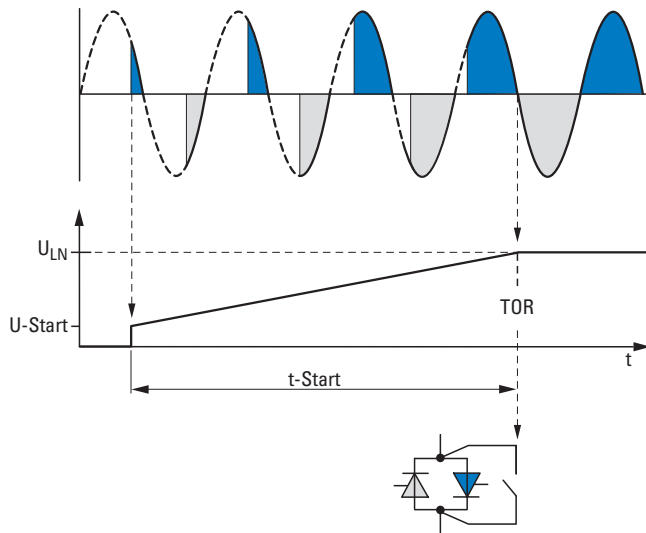

U_{LN} = mains supply voltage

U-Start: start voltage

t-Start: Ramp time of the voltage change at start


TOR (Top of Ramp) = Signals the end of the set "t-Start" ramp time (output voltage U_2 = mains supply voltage U_{LN}). The internal bypass contacts are closed after this.

This voltage control enables the inrush current of a three-phase asynchronous motor to be limited and its starting torque to be reduced. This enables a smooth and jerk-free increase in torque, adjusted in line with the machine's load behavior. This has a positive effect on the lifespan, operating behavior, and operating processes of the mechanical equipment and prevents negative effects such as:

- Impacting of cog edges in the gearbox
- Pressure surge in pipe systems (water impact),
- Slipping of V belts or
- Jitter with conveyor systems.

In DS7 and S811+ series soft starters, generalized phase control is achieved with anti-parallel thyristors that are bypassed for continuous operation by using bypass contacts (TOR = Top Of Ramp) after the time for a time-triggered voltage change (t-Start) has elapsed. The transition resistance of these bypass contacts is considerably lower than the transition resistance of the power semiconductors. This reduces the heat dissipation in the soft starter and extends the lifespan of the power semiconductors.

As well as the time-controlled startup of a motor, the soft starter also enables a time-controlled reduction of the motor voltage and thus a controlled stopping of the motor.

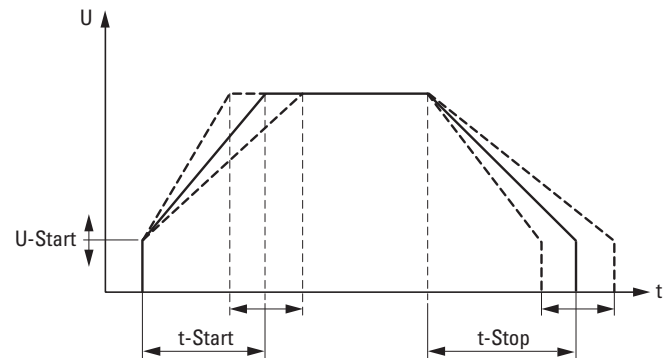

The output voltage of a soft starter determines the torque of the motor ($M \sim U_2$). Because of this, it is necessary to make sure that, when a machine starts up, the selected U-Start start voltage is not too low and the t-Start ramp time for the linear voltage change is set to be as short as possible.


Please note:

- Long ramp times (t-Start) will produce a soft startup behavior, but will also result in a higher thermal load on the thyristors
- A high start voltage (U-Start) will produce a higher torque and a high starting current
- Set the lowest possible start voltage and the shortest possible start ramps.

The following pages include application and setting configuration examples for DS7 soft starters.

If controlled deceleration is required, t-Stop must be set to a longer time than would be necessary for the machine to coast freely based on the load. For the thyristors, the controlled deceleration constitutes a load comparable to that produced during startup. If, for example, the deceleration ramp is activated on a soft starter with a maximum of 10 permissible starts per hour, the number of permissible starts will be reduced to five per hour (plus five stops within that hour).

Selection Criteria

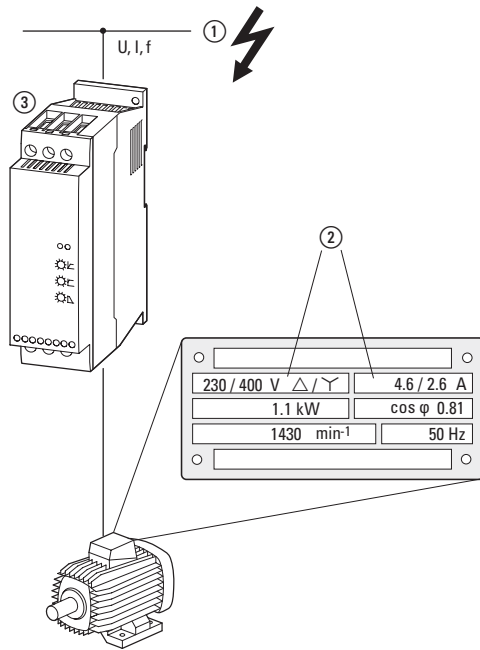

Soft starters ③ are selected based on the supply voltage of the corresponding grid ① (U_{LN}) and the rated operational current of the assigned motor ②. The motor's circuit configuration (Δ/Y) must be selected in such a way that it matches the supply voltage. In addition, the soft starter's rated operational current (I_g) must be at least equal to that of the motor.

Additional selection criteria include:

- Ambient air temperature (rated value +40 °C)
- The number of starts per hour (< 10 starts, take stops into account)
- Load torque (quadratic, linear)
- Starting torque


Centrifugal pumps, centrifugal fans, simple and smooth-running conveyor belts and traction drives, and circular saws and ribbon saws are some of the typical applications for which soft starters are used. Reciprocating compressors, mixers, mills, crushers, and lifting gear are instead categorized as heavy starting duty machines. In this case, the soft starter must be oversized in terms of its overload capacity.

In the case of applications that are typical for a soft starter, such as water pumps (centrifugal pumps), and that feature comparable operational data (operating frequency, run-up time, and/or inrush currents) a soft starter can be assigned directly to the motor on the basis of the rated operational current.

Example:

- 15 kW pump motor
- 400 V
- Rated operational current 29 A
- About three times the starting current ($I_{LRP} = 87$ A),
- A maximum of 10 starts per hour
- 5-second start-up time,
- Ambient air temperature 40 °C.

=> DS7-34...032... ($I_g = 32$ A)

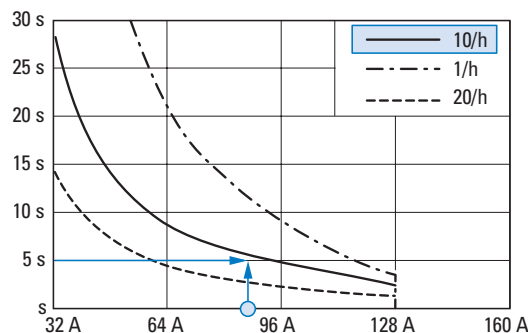

When different operating frequencies, acceleration and/or starting currents are involved, the thermal capacity of the DS7 soft starter must be taken into account in the design. This can be done by using the following diagrams or by calculating the I^2t values. These I^2t values define the corresponding load capacity and overload cycle and are defined in product standard IEC/EN 60947-4-2.

DS7-34...SX032...soft starter:

- 32 A: AC-53a: 3-5: 75-10
- Rated operational current (I_g) 32 A
- Load cycle AC-53a
- 300% overcurrent for 5 seconds
- 75% duty factor with 10 starts per hour

The resulting I^2t value is: $(3 \times 32 \text{ A})^2 \times 5 \text{ s} = 46\,080 \text{ A}^2\text{s}$

The maximum I^2t value of the connected motor load must be smaller: $(3 \times 29 \text{ A})^2 \times 5 \text{ s} = 37\,845 \text{ A}^2\text{s}$

Soft starter DS7-34...SX032... is the right choice for this application.

If the motor had a higher inrush current, e.g., 5 times the starting current, a more powerful soft starter would have to be selected:

• Motor inrush current:


$I_{LRP} = 5 \times 29 = 145 \text{ A}$, I^2t value = $(5 \times 29 \text{ A})^2 \times 5 \text{ s} = 105\,125 \text{ A}^2\text{s}$

• DS7-34...SX041...: 41 A:

AC-53a: 3-5: 75-10

=> $(3 \times 41 \text{ A})^2 \times 5 \text{ s} = 75\,645 \text{ A}^2\text{s}$

Soft starter DS7-34...SX041... cannot meet the required startup and load conditions required in this case.

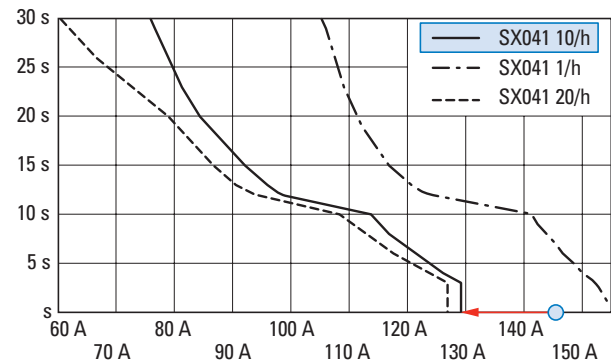


DS7-34...SX055...:

55 A: AC-53a: 3-5: 75-10

=> $(3 \times 55 \text{ A})^2 \times 5 \text{ s} = 136\,125 \text{ A}^2\text{s}$

Soft starter DS7-34...SX055... however, does meet the required startup and load conditions.

Note: As the following diagram shows, the DS7-34...SX055... unit can handle even more demanding startup and load requirements, e.g., up to 20 starts per hour and longer start-up times (up to 10 seconds).

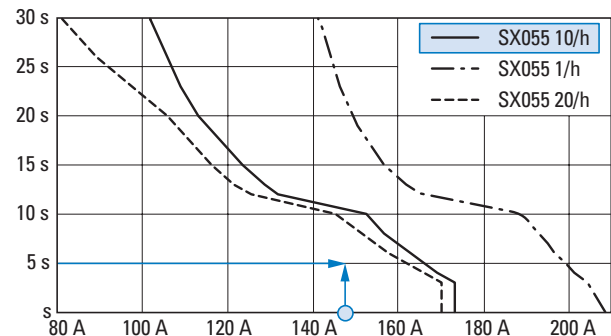


1.1


DS7 soft starters

Design with different load cycles


DS7-34x...SX004...

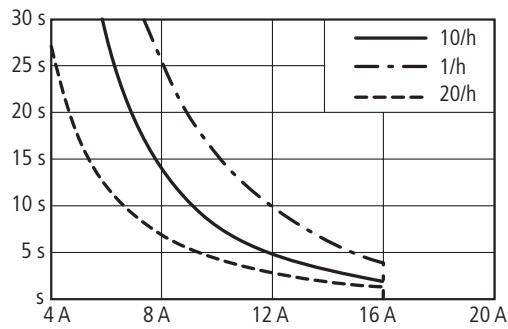


DS7-34x...SX007...

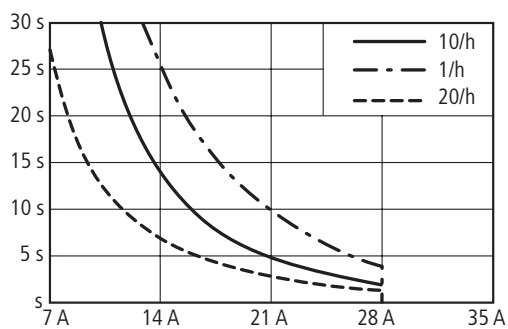


DS7-34x...SX009...

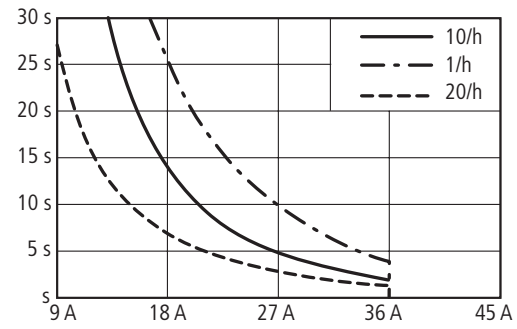


DS7-34x...SX012...

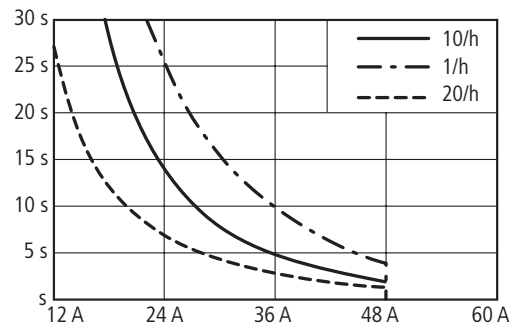


DS7-34x...SX016...

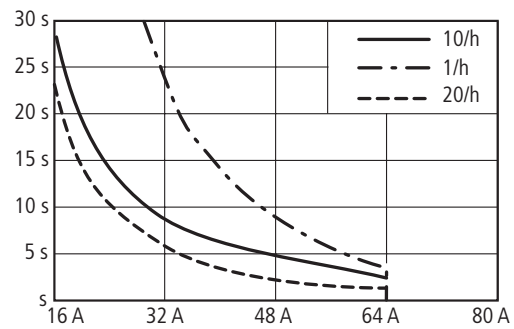


DS7-34x...SX024...

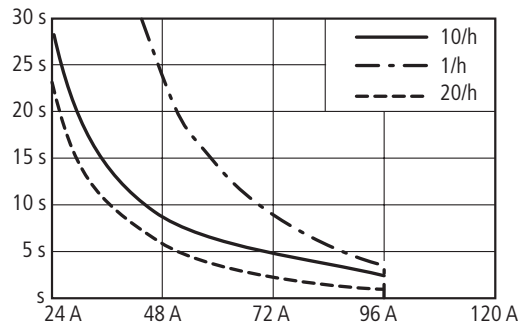


DS7-34x...SX032E...

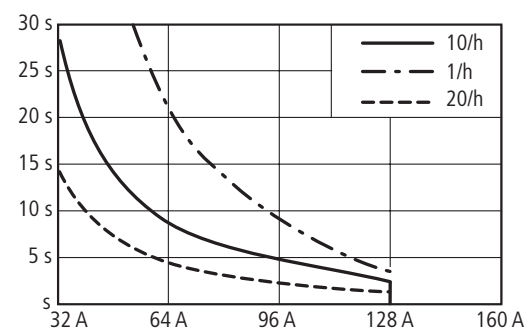


DS7-34...SX041N0-...

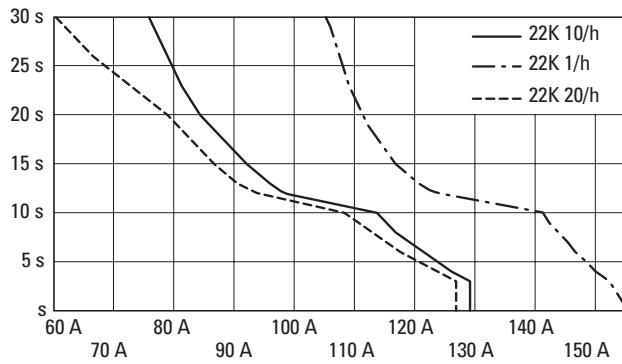


DS7-34...SX055N0-...

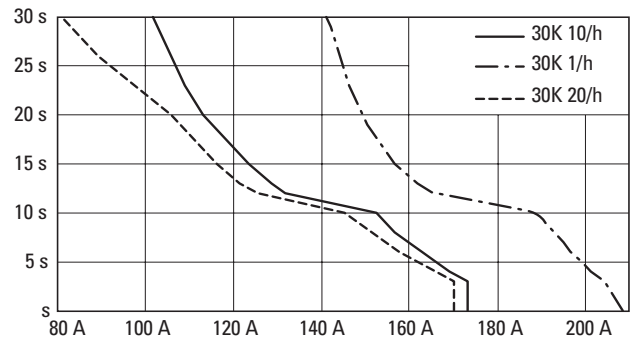


DS7-34...SX070N0-...

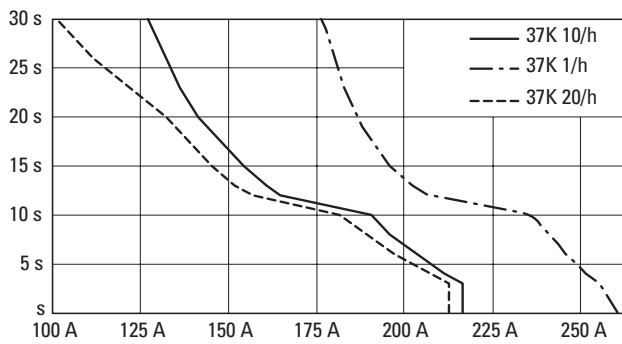


DS7-34...SX081N0-...

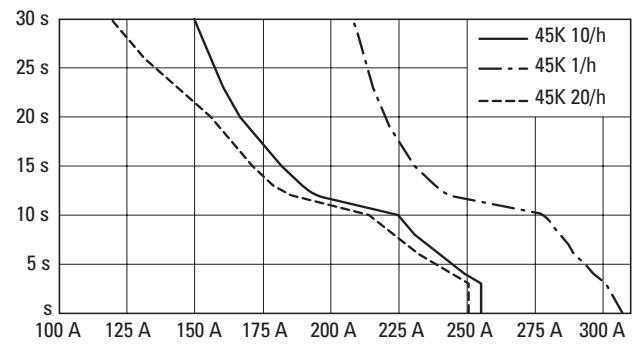


DS7-34...SX100N0-...

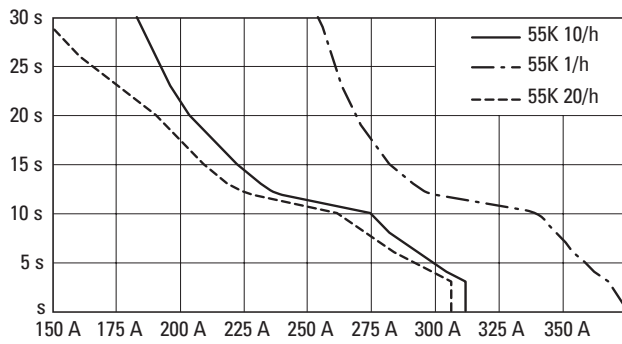


DS7-34...SX135N0-...

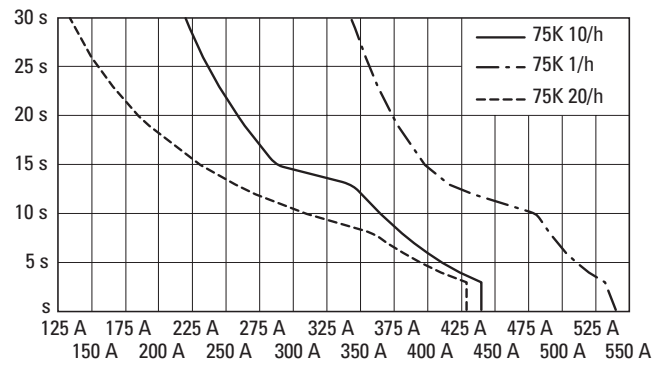

DS7-34...SX160N0-...

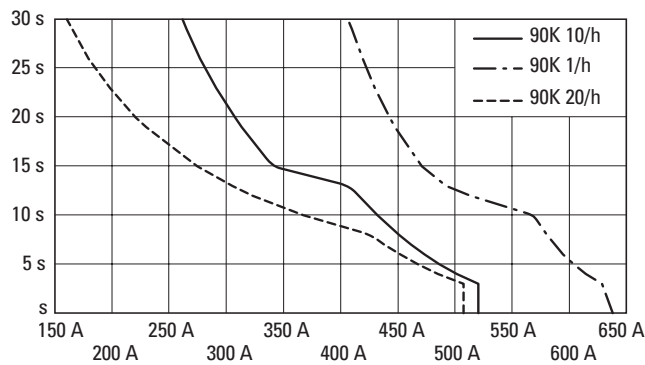

DS7-34...SX200N0-...

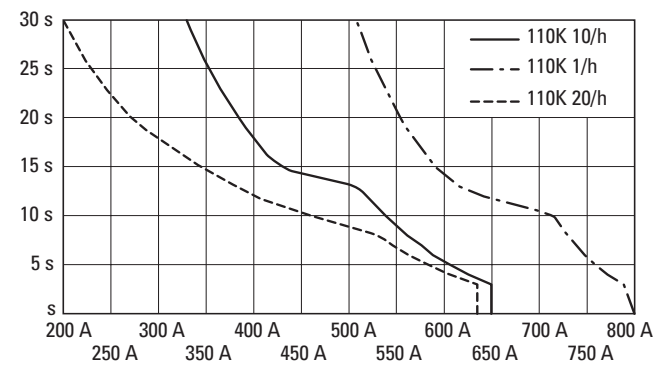


1.1


DS7 soft starters

Connection examples

Standard connection up to 12 A

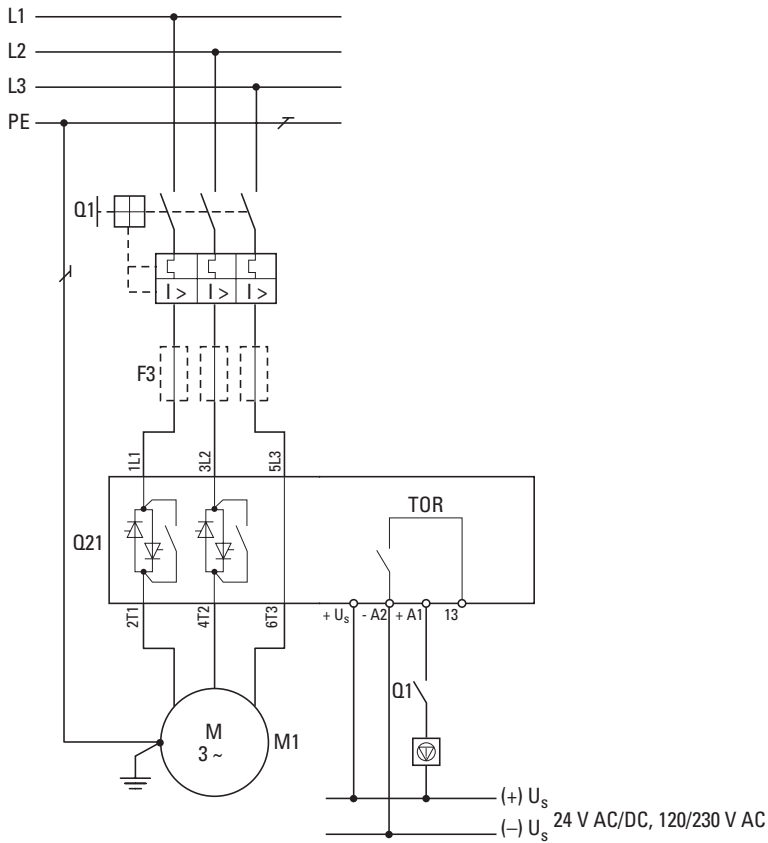


Standard connection up to 32 A

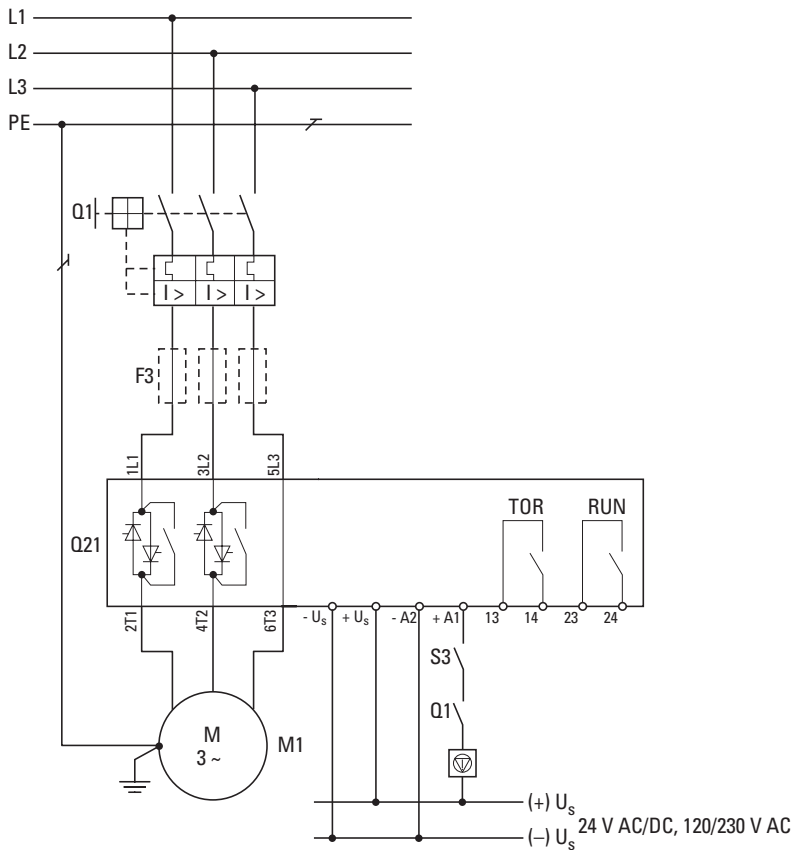

Standard connection 41 - 200 A

With Emergency switching off function according to IEC/EN 60 204-1 and VDE 0113 Part 1

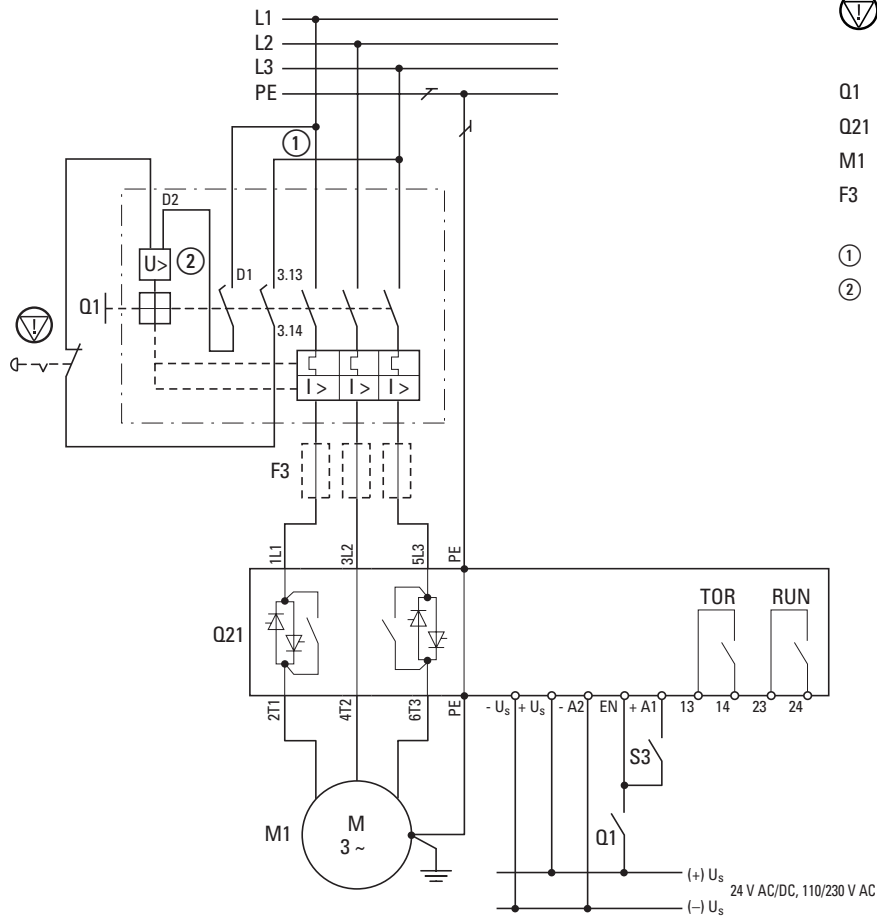

 = EMERGENCY SWITCHING OFF

Q1 = Cable and motor protection (NZM1, NZM2)

Q21 = DS7 soft starter

M1 = Motor

F3 = Superfast semiconductor fuse, optional for type 2 coordination (in addition to Q1)

① Control circuit terminal

② Undervoltage release with early-make auxiliary contact

1.1

DS7 soft starters

Assigned switching and protective elements for DS7

Model code Soft starters (device to be selected)	Power rating	Output current ¹⁾	Line protection ²⁾ Type 1 coordination	Overload relays ³⁾	Mains contactor optional ⁴⁾	Fuse ⁵⁾	Fuse holder
	kW	A					
DS7-34xSX004N0-x	1.5	4	PKZM0-4(+CL-PKZ0)	ZB12-4	DILM7-10(24VDC)	3 × 170M1359	3 × 170H1007
DS7-34xSX007N0-x	3	7	PKZM0-10(+CL-PKZ0)	ZB12-10	DILM9-10(24VDC)	3 × 170M1361	3 × 170H1007
DS7-34xSX009N0-x	4	9	PKZM0-10(+CL-PKZ0)	ZB12-10	DILM9-10(24VDC)	3 × 170M1362	3 × 170H1007
DS7-34xSX012N0-x	5.5	12	PKZM0-12(+CL-PKZ0)	ZB12-12	DILM12-10(24VDC)	3 × 170M1362	3 × 170H1007
DS7-34xSX016N0-x	7.5	16	PKZM0-16(+CL-PKZ0)	ZB32-16	DILM17-10(RDC24)	3 × 170M1364	3 × 170H1007
DS7-34xSX024N0-x	11	24	PKZM0-25(+CL-PKZ0)	ZB32-24	DILM25(RDC24)	3 × 170M1365	3 × 170H1007
DS7-34xSX032N0-x	15	32	PKZM0-32(+CL-PKZ0)	ZB32-32	DILM32(RDC24)	3 × 170M1366	3 × 170H1007
DS7-34xSX041N0-x	22	41	NZMN1-M50/PKZM4-50	ZB65-40+ZB65-XEZ	DILM50(RDC24)	3 × 170M3013	3 × 170H3004
DS7-34xSX055N0-x	30	55	NZMN1-M63/PKZM4-58	ZB65-57+ZB65-XEZ	DILM65(RDC24)	3 × 170M3013	3 × 170H3004
DS7-34xSX070N0-x	37	70	NZMN1-M80	ZB150-70/KK	DILM80(RDC24)	3 × 170M4008	3 × 170H3004
DS7-34xSX081N0-x	45	81	NZMN1-M100	ZB150-100/KK	DILM95(RDC24)	3 × 170M4008	3 × 170H3004
DS7-34xSX100N0-x	55	100	NZMN1-M100	ZB150-100/KK	DILM115(RDC24)	3 × 170M4008	3 × 170H3004
DS7-34xSX135N0-x	75	135	NZMN2-M160	ZB150-150/KK	DILM150(RDC24)	3 × 170M4010	3 × 170H3004
DS7-34xSX160N0-x	90	160	NZMN2-M200	Z5-160/FF250	DILM185A/22(RAC240)	3 × 170M5008	3 × 170H3004
DS7-34xSX200N0-x	110	200	NZMN2-M200	Z5-220/FF250	DILM225A/22(RAC240)	3 × 170M5008	3 × 170H3004

Notes

¹⁾ Rated operational current based on the load cycle specified here.

²⁾ Indicates the circuit-breaker required for the indicated load cycle. At different duty cycles (operating frequency, overcurrent, overcurrent time, duty factor), this value changes and must then be adapted accordingly.

³⁾ An external overload relay is required if the main contacts should not be disconnected in the event of an overload and a controlled soft stop is desired instead.

⁴⁾ A mains contactor is not required. Disconnection characteristics in accordance with VDE can only be ensured with the specified circuit-breaker.

⁵⁾ The superfast semiconductor fuses protect the soft starters from motor-side short-circuits. This can not, however, prevent damage caused by voltage peaks, for example through lightning strike.

Technical specifications

	24 V AC/DC		Supply voltage U _c	
	DS7-340...		120/230 V AC	+24 V
			DS7-342...	DS7-34D... (SmartWire-DT)
General				
Radio interference level		B	"A" group 1	B
Actuating circuit				
Regulator supply voltage U _s				
Voltage	V	+24 +10%/-15%	120 (-15%) - 230 (+10%)	+24 DC +10%/-15%
Frequency at V AC	Hz	(50/60)	50/60	
Current consumption no-load losses (without device fan)	mA	50	50	50
Current consumption operation (without device fan)	mA	130	100	130
Current consumption peak performance (Close bypass contacts, without device fan)	mA	130	130	130
Fan current consumption (operation)	mA	50	50	50
Control voltage range U _c				
DC operated	V DC	24 +10%/-15%		24 +10%/-15%
AC operated	A DC	24 +10%/-15%	120 (-15%) - 230 (+10%)	
Current consumption per input (+A1, EN)	mA	1.6	4	1.6
Pick-up voltage (High signal)				
DC operated	V DC	17.3 - 27		17.3 - 27
AC operated	V AC	17.3 - 27	~100 - 253	
Drop-out voltage (Low signal)				
DC operated	V DC	0 - 3		0 - 3
AC operated	V AC	0 - 3	0 - 28	
Pick-up time				
DC operated	ms	250		250
AC operated	ms	250	250	
Falling time				
DC operated	ms	350		350
AC operated	ms	~0	350	


Size	Unit	Frame size 1: 4 - 12 A	Frame size 2: 16 - 32 A	Frame size 3: 41 - 100 A	Frame size 4: 135 - 200 A
General					
Dimensions W x H x D	mm	45 x 130 x 95	45 x 150 x 118	93 x 175 x 139	108 x 215 x 178
Weight	kg	0.35	0.4	1.8	3.7
Terminal capacities					
Cables (box terminal)					
Solid	mm ²	1 x (0.75 - 4) 2 x (0.75 - 2.5)	1 x (0.75 - 16) 2 x (0.75 - 10)	1 x (25 - 70) 2 x (6 - 25)	1 x (4 - 185) 2 x (4 - 70)
Flexible with ferrule	mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)	1 x (0.75 - 16) 2 x (0.75 - 10)		
Stranded	mm ²		1 x 16 2 x 16	1 x (25 - 70) 2 x (6 - 25)	1 x (4 - 185) 2 x (4 - 70)
Solid or stranded	AWG	1 x (18 - 10) 2 x (18 - 10)	1 x (14 - 8) 2 x (14 - 8)	1 x (12 - 2/0)	1 x (12 - 350) 2 x (12 - 00)
Flat conductor					
minimum	mm			2 x 9 x 0.8	2 x 9 x 0.8
maximum	mm			9 x 9 x 0.8	10 x 16 x 0.8
Tightening torque	Nm	1.2	3.2	9 (> 10 mm ²) 6 (≤ 10 mm ²)	14 (> 10 mm ²) 5 (≤ 10 mm ²)
Control cables					
Solid	mm ²	1 x (0.75 - 4) 2 x (0.75 - 2.5)	1 x (0.75 - 4) 2 x (0.75 - 1.5)	1 x (0.75 - 4) 2 x (0.75 - 1.5)	1 x (0.75 - 4) 2 x (0.75 - 1.5)
Flexible with ferrule	mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)
Stranded	mm ²				
Solid or stranded	AWG	1 x (18 - 10) 2 x (18 - 10)	1 x (18 - 14) 2 x (18 - 16)	1 x (18 - 14) 2 x (18 - 16)	1 x (18 - 14) 2 x (18 - 16)
Tightening torque	Nm	1.2	0.6	0.6	0.6
Screwdriver (flat blade)	mm	0.6 x 3.5	0.6 x 3.5	0.6 x 3.5	0.6 x 3.5
Actuating circuit					
Relay outputs					
Qty.		1 (TOR)	2 (TOR, RUN/READY) ¹⁾	2 (TOR, RUN/READY) ¹⁾	2 (TOR, RUN/READY) ¹⁾
Max. voltage range	V AC/DC = U _s		250	250	250
Max. load current	A	1	1	1	1

Notes¹⁾ Does not apply for DS7 soft starters with SmartWire-DT (DS7-...-D).

Dimensions and weights


Frame size 1

Dimension drawing DS7 without SWD – Size 1 (up to 12 A)

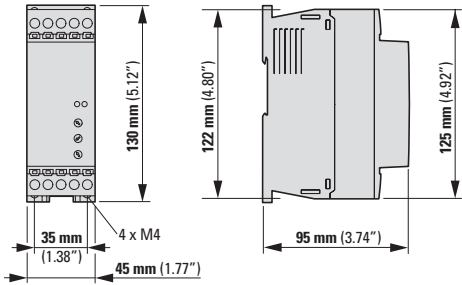


Frame size 2


Dimension drawing for DS7 without SWD – Size 2 (16 - 32 A)

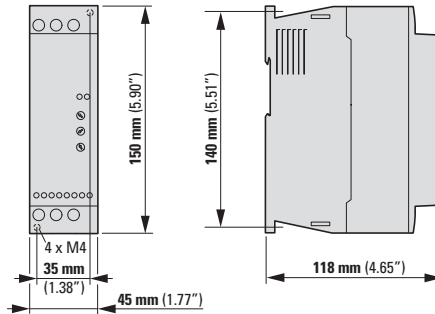

Dimension drawing DS7 with SWD – Size 1 (up to 12 A)

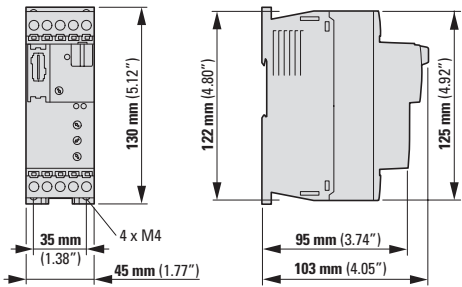

Dimension drawing for DS7 with SWD – Size 2 (16 - 32 A)

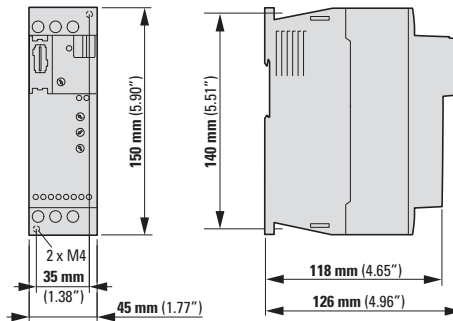

DS7-34...SX...	Weight
	kg
...003...	DS7-340...: 0.3
...004...	DS7-340...: 0.3
...005...	DS7-34D...-D: 0.33
...007...	
...009...	
...012...	

DS7-34...SX...	Weight
	kg
...016...	0.4
...024...	
...032...	


1.1

DS7 soft starters


Dimensions and weights

Frame size 3

Dimension drawing for DS7 without SWD – Size 3 (41 - 100 A)

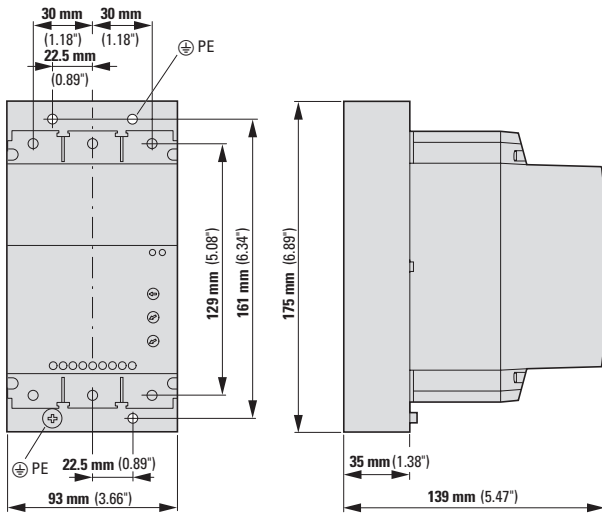


Dimension drawing for DS7 with SWD – Size 3 (41 - 100 A)

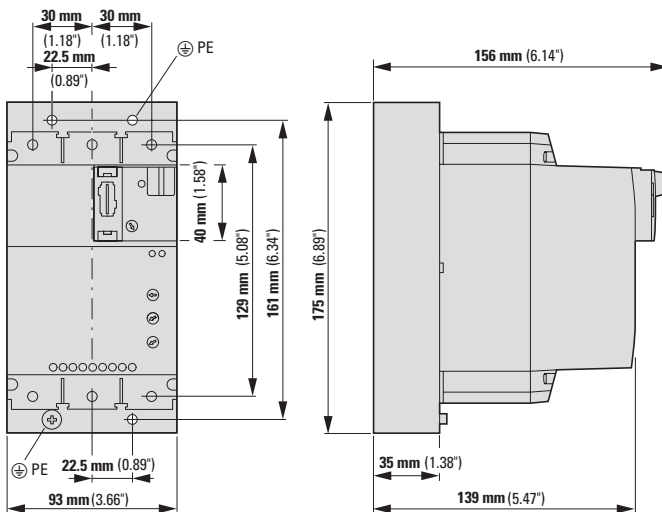


DS7-34...SX...	Weight
	kg
...036...	1.8
...041...	
...055...	
...070...	
...081...	
...100...	

Frame size 4

Dimension drawing for DS7 without SWD – Size 4 (135 - 200 A)

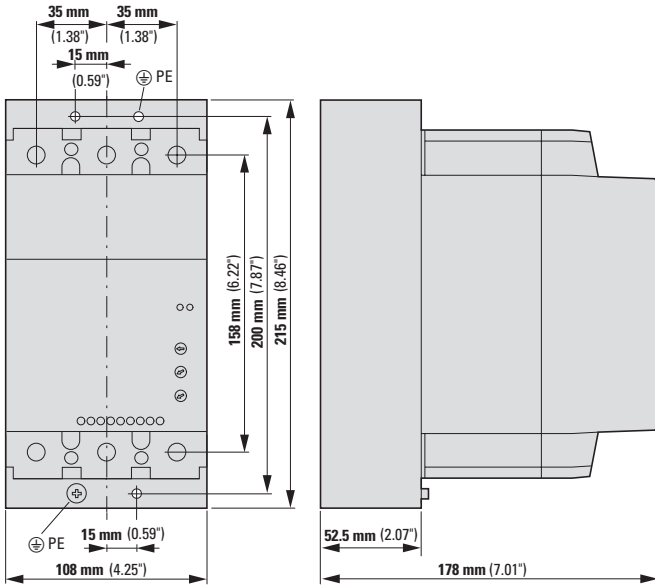

Dimension drawing for DS7 with SWD – Size 4 (135 - 200 A)

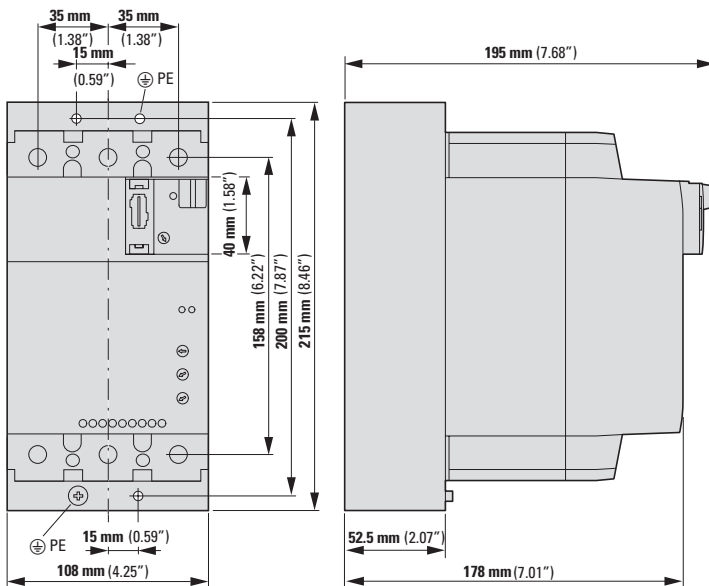

DS7-34...SX...	Weight
	kg
...135...	3.4
...160...	
...200...	


1.1

DS7 soft starters


Dimensions and weights

DS7-FAN-... device fan

DS7-FAN-100

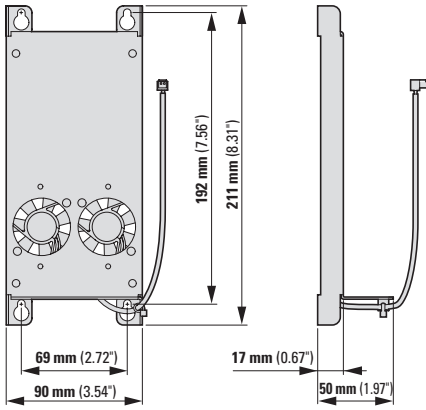

DS7-FAN-200

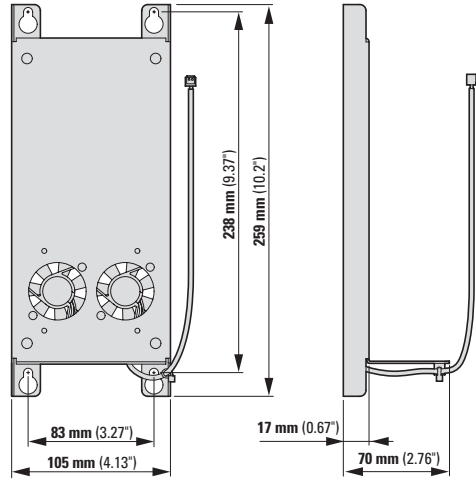



S711 soft starters

Easier to control than ever before

S711 is setting new standards in soft start technology, offering smart, powerful control and protection features, and Bluetooth LE capability.

In combination with the S711 Connect app for iOS and Android, the Bluetooth connection can be used to download and upload parameters, forward event logs or status information and perform firmware updates.

Range

- 12 - 560 A
- 5.5 - 315 kW (U_b : 200 - 600 V)

Eaton Cybersecurity

The S711 is "secure by design". Our approach to secure development lifecycle processes is built upon widely-recognized UL 2900 and IEC 62443 standards

Bluetooth integrated

With S711 Connect app you can connect with the S711 via Bluetooth without opening the control cabinet.

Rated from 12 A to 560 A and available in four different frame sizes, the S711 is designed with advanced cybersecurity features as well as Modbus RTU on-board. It also offers the flexibility to add optional communication cards, ensuring maximum reliability and adaptability for your needs.

Smartphone App

The S711 is the first soft starter in the world with integrated Bluetooth interface and companion app. This enables completely easy commissioning and service:

- Configuration of parameters
- Easy storage and backup of configuration
- Effortless machine management
- Data analysis and access to log files
- Download of service and support data
- Easy firmware updates

Available for Android and iOS.

[Eaton.com/s711app](https://www.eaton.com/s711app)



For more information, visit:
[Eaton.com/s711](https://www.eaton.com/s711)

Unique pump control profiles

Intelligent pump control profiles are designed for ideal control of different types of pump systems, ensuring optimal performance and protection. These profiles adjust the motor's operation to match the specific requirements of various pump applications.

This results in smoother operation, reduced mechanical stress, and extended equipment life.

Forward and reverse jog

With the S711, forward and reverse jogging functionality is enabled, providing precise control for positioning and maintenance tasks.

This feature allows for small, controlled movements of the motor, facilitating accurate positioning and adjustments. It is an essential tool for maintenance and setup operations, ensuring precise and efficient control.

User-friendly, detachable interface

The detachable HMI is easy to set up featuring a compact design. Equipped with a full graphic display, it simplifies configuration and operation and intuitively indicates the device's status, parameters and fault codes. Moreover, it is possible to set the menu to 8 different languages.

Short-circuit protection

For short-circuit protection up to 100 kA, for IEC and UL markets. Suitable for coordination Type 1 and Type 2.

- NZMH up to 100 kA
- Fuses up to 100 kA

Robust design

- IP20 and IP00 protection
- Ambient temperature down to -40 °C with cold weather function, up to +60 °C
- Adjustable overload class from Class 5 to 30
- Integrated bypass in all frame sizes
- Star-Delta and In-Delta motor connection
- On-board Modbus RTU pluggable terminal
- Control voltages in two version as 24 V DC or 110 - 240 V AC

Selection Tool

S711 Select is dedicated PC software designed to simplify the process of choosing the perfect soft starter for your application. Just enter your application parameters and S711 Select will recommend the ideal model tailored to your needs.

The tool calculates the maximum Full Load Amps (FLA) for your selected model, ensuring optimal performance and compatibility.

Accessories

- Terminal covers for frame 3 and 4
- Modbus TCP ComCard
- Ethernet/IP ComCard
- PROFINET ComCard


Applications

- Conveyor belts
- Extruder
- Fans
- Pumps
- Compressors
- Crusher
- Mixer
- Silos
- Saw various types



1.1 S711 soft starters

System overview	43
Key to type references	44
UL/CSA and sizes	45
Ordering	46
Basic devices	46
Accessories	47
Engineering	48
Assigned switching and protective elements for S711	50
Technical specifications	52
Dimensions and weights	54

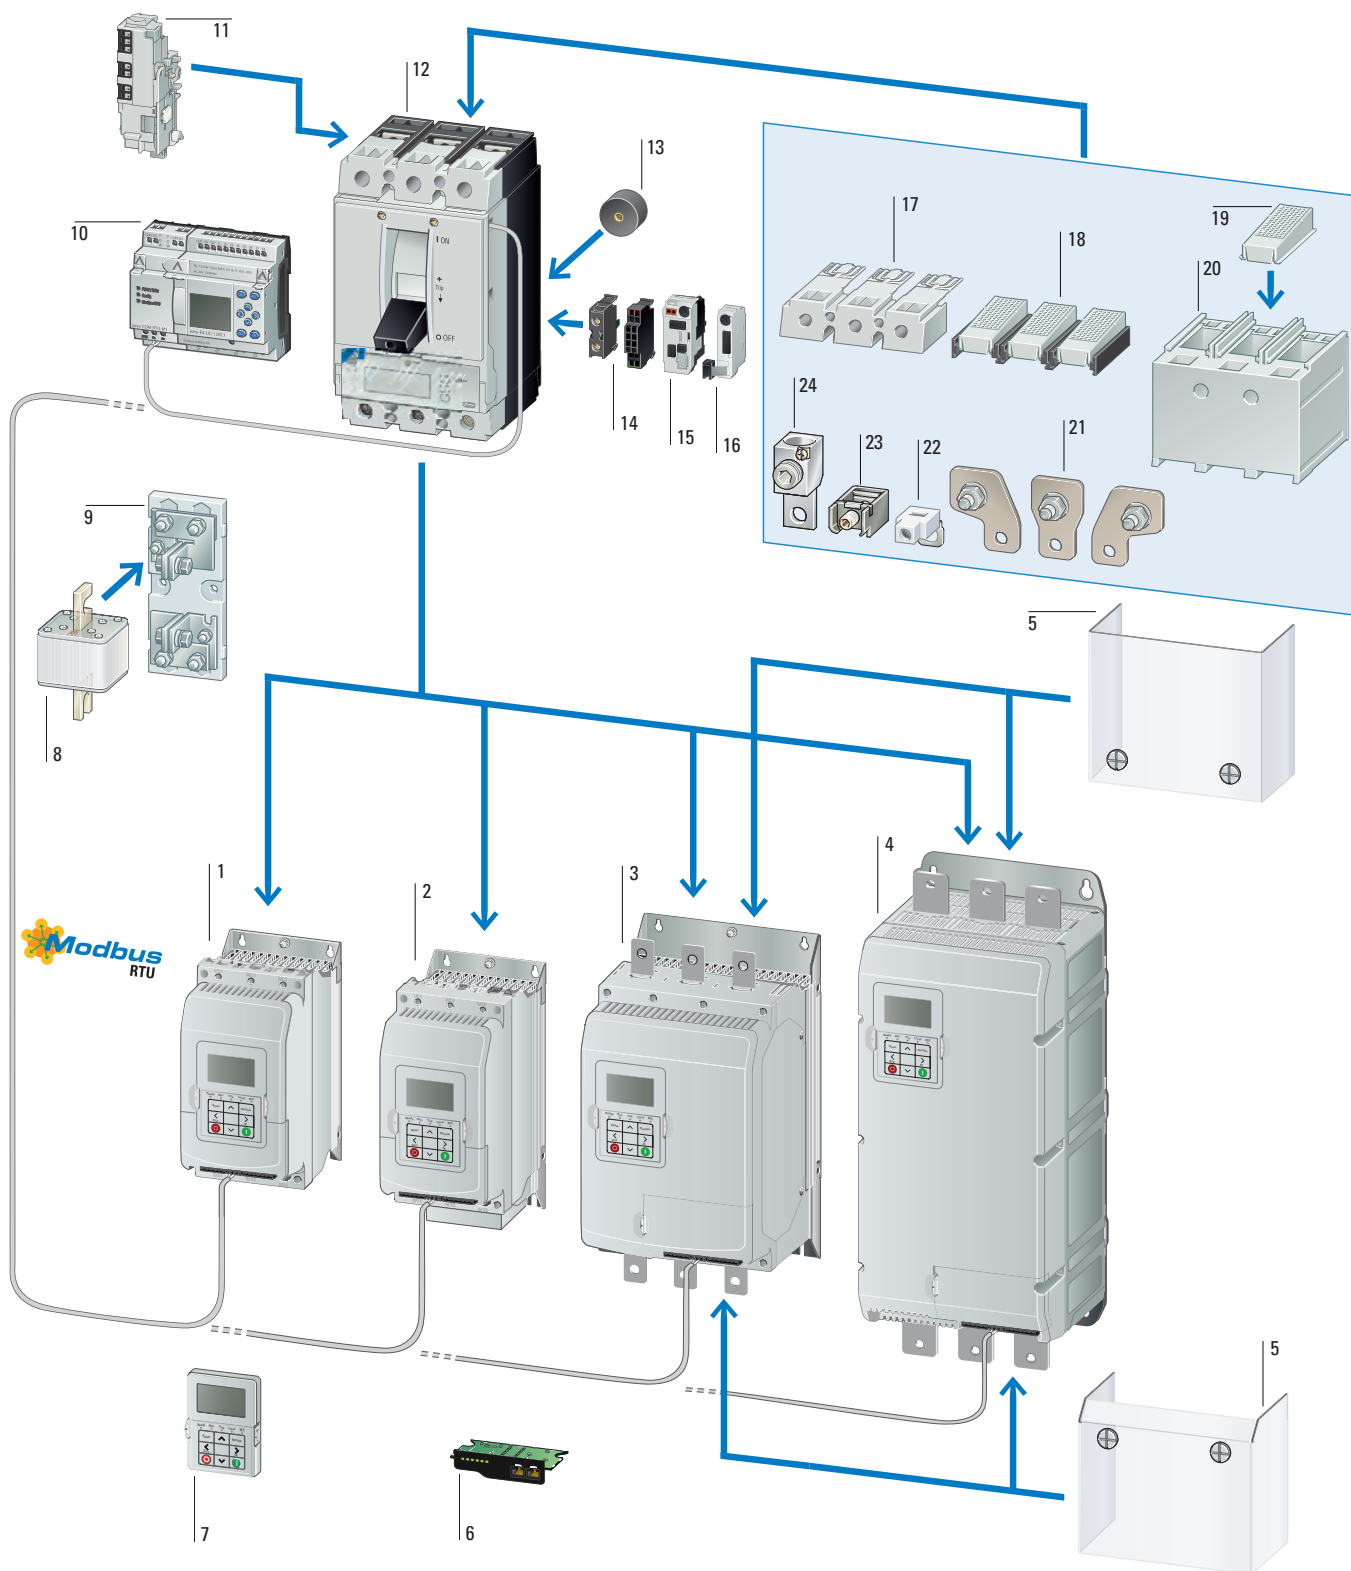


1.1

S711 soft starters

System overview

S711 Frame size 1 up to 47 A	1	easyE4 control relay	10	Terminal cover for terminals	17
→ Page 46		→ Catalog "Solutions for machinery and systems"		→ Catalog "Solutions for machinery and systems"	
S711 Frame size 2 up to 115 A	2	Voltage release/early-make auxiliary contact	11	IP2X protection against contact with a finger	18
→ Page 46		→ Catalog "Solutions for machinery and systems"		→ Catalog "Solutions for machinery and systems"	
S711 Frame size 3 up to 320 A	3	NZM circuit breaker	12	IP2X protection against contact with a finger	19
→ Page 46		→ Catalog "Solutions for machinery and systems"		→ Catalog "Solutions for machinery and systems"	
S711 Frame size 4 up to 560 A	4	Spacer	13	Terminal cover for cable lugs	20
→ Page 46		→ Catalog "Solutions for machinery and systems"		→ Catalog "Solutions for machinery and systems"	
Terminal shroud	5	Standard auxiliary contacts, Trip-indicating auxiliary switches	14	Connection width extension	21
→ Page 47		→ Catalog "Solutions for machinery and systems"		→ Catalog "Solutions for machinery and systems"	
Communication modules, Expansion modules	6	BSM Interface module	15	Control circuit terminal	22
→ Page 47		→ Catalog "Solutions for machinery and systems"		→ Catalog "Solutions for machinery and systems"	
External keypad	7	Interface communication module for Modbus RTU	16	Frame clamps	23
→ Page 47		→ Catalog "Solutions for machinery and systems"		→ Catalog "Solutions for machinery and systems"	
Superfast semiconductor fuses	8			Tunnel terminals for Al and Cu cable	24
→ Catalog "Solutions for machinery and systems"				→ Catalog "Solutions for machinery and systems"	
Fuse bases for superfast semiconductor fuses	9				
→ Catalog "Solutions for machinery and systems"					

Key to type references

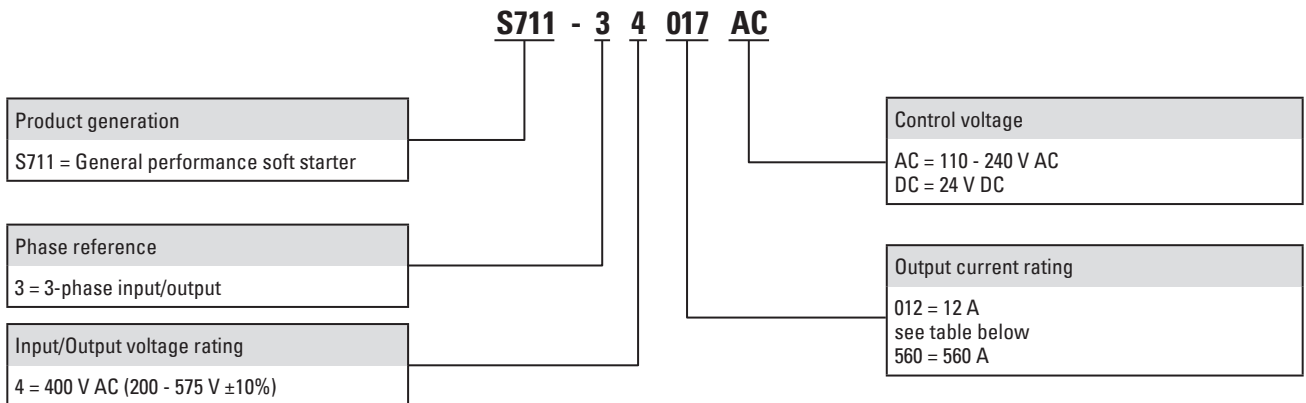

Output current rating

Frame size 1	Frame size 2	Frame size 3	Frame size 4
012 = 12 A, 5.5 kW, 7.5 HP	062 = 62 A, 30 kW, 40 HP	140 = 140 A, 75 kW, 100 HP	320 = 320 A, 185 kW, 250 HP
017 = 17 A, 7.5 kW, 10 HP	075 = 75 A, 37 kW, 50 HP	170 = 170 A, 90 kW, 125 HP	410 = 410 A, 220 kW, 300 HP
025 = 25 A, 11 kW, 15 HP	088 = 88 A, 45 kW, 60 HP	210 = 210 A, 110 kW, 150 HP	480 = 480 A, 250 kW, 350 HP
032 = 32 A, 15 kW, 20 HP	115 = 115 A, 55 kW, 75 HP	250 = 250 A, 132 kW, 200 HP	560 = 560 A, 315 kW, 450 HP
047 = 47 A, 22 kW, 30 HP			


A rating at 40 °C
 kW rating at 400 V AC, 50 Hz, 40 °C
 HP rating at 460 V AC, 60 Hz, 50 °C

UL / CSA

Information relevant or export to North America

Product standards	UL 60947-1; UL 60947-4-2; CSA C22.2 No. 60947-1; CSA C22.2 No. 60947-4-2; EN 60947-1; EN 60947-4-2; EN 300 328; EN 301 489-1; EN 301 489-17; UL marking; CUL marking; CE marking;
UL file no.	E251034
UL category control no.	NMFT, NMFT7
CSA file no.	UL report applies to both US and Canada
North America certification	UL listed, certified by UL for use in Canada
Suitable for	Branch circuits
Max. voltage rating	200-575 V AC +10%/-15%. Supply: Y and D Earthing systems: TN-C, TN-S, TT, I

Sizes

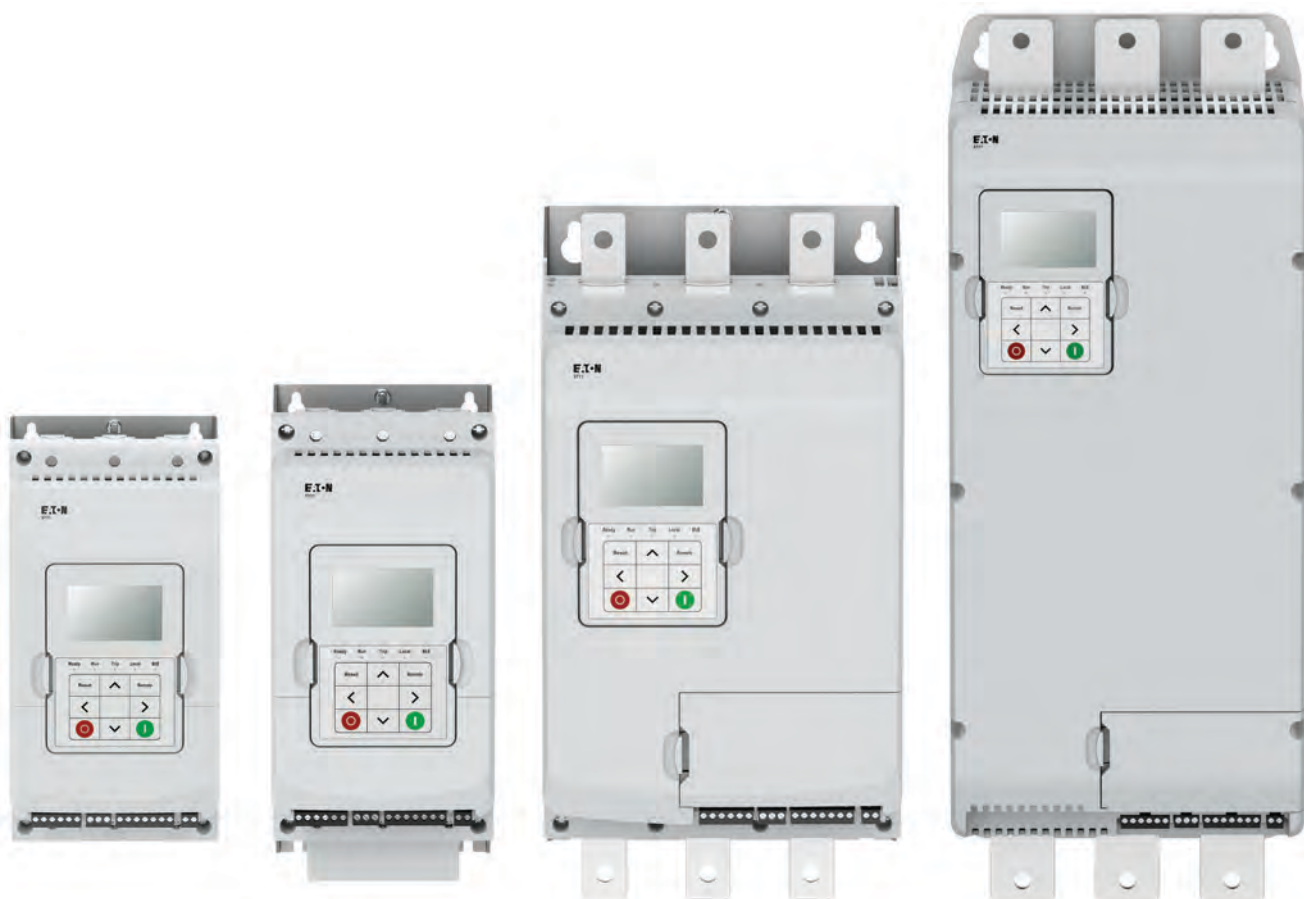

1.1

S711 soft starters

Basic devices

S711

Ordering


Frame size	Protection type	Rated operational current	Assigned motor rating		Model code	Catalog number	Model code	Catalog number	Std. pack
			at 400 V, 50 Hz	at 460 V, 60 Hz					
		Device (AC-53)	P	P					
		I _e	kW	HP					
		A							

S711 soft starters


Supply voltage U_s: 24 V DC
 Supply voltage U_s: 110-240 V AC
 Control voltage U_c: 24 V DC

FS1	IP20	12	5.5	7.5	S711-34012AC	EP-401515	S711-34012DC	EP-401532	1 unit
		17	7.5	10	S711-34017AC	EP-401516	S711-34017DC	EP-401533	
		25	11	15	S711-34025AC	EP-401517	S711-34025DC	EP-401534	
		32	15	20	S711-34032AC	EP-401518	S711-34032DC	EP-401535	
		47	22	30	S711-34047AC	EP-401519	S711-34047DC	EP-401536	
FS2	IP20	62	30	40	S711-34062AC	EP-401520	S711-34062DC	EP-401537	
		75	37	50	S711-34075AC	EP-401521	S711-34075DC	EP-401538	
		88	45	60	S711-34088AC	EP-401522	S711-34088DC	EP-401539	
		115	55	75	S711-34115AC	EP-401523	S711-34115DC	EP-401540	
FS3	IP00	140	75	100	S711-34140AC	EP-401524	S711-34140DC	EP-401541	
		170	90	125	S711-34170AC	EP-401525	S711-34170DC	EP-401542	
		210	110	150	S711-34210AC	EP-401526	S711-34210DC	EP-401543	
		250	132	150	S711-34250AC	EP-401527	S711-34250DC	EP-401544	
FS4	IP00	320	185	200	S711-34320AC	EP-401528	S711-34320DC	EP-401545	
		410	220	300	S711-34410AC	EP-401529	S711-34410DC	EP-401546	
		480	250	350	S711-34480AC	EP-401530	S711-34480DC	EP-401547	
		560	315	450	S711-34560AC	EP-401531	S711-34560DC	EP-401548	


S711 frame sizes




Frame size 1



Frame size 2

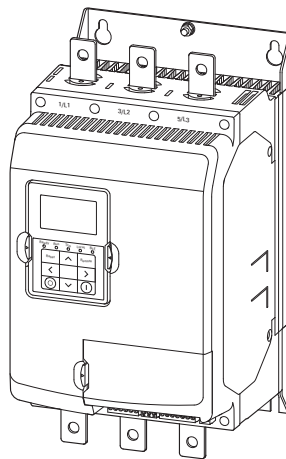


Frame size 3

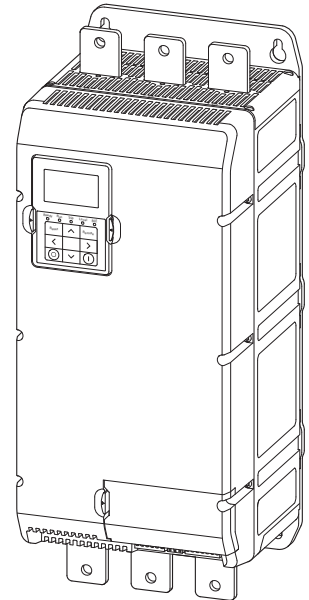

Frame size 4


Description	For use with	Model code	Catalog number	Std. pack
-------------	--------------	------------	----------------	-----------

Communication cards



PROFINET	S711 (IP00, IP20)	S711-NET-PROFINET-2	EP-401549	1 unit
Ethernet/IP	S711 (IP00, IP20)	S711-NET-ETHERNET-2	EP-401550	
Modbus TCP	S711 (IP00, IP20)	S711-NET-MOVBUSTCP-2	EP-401551	

External keypad



Replacement keypad with display	S711 (IP00, IP20)	S711-KEY-LCD	EP-401552	1 unit
---------------------------------	-------------------	---------------------	-----------	--------

Terminal cover



for use with frame size 3	S711 (IP00)	S711-XHB-FS3	EP-401629	1 unit
---------------------------	-------------	---------------------	-----------	--------




for use with frame size 4	S711 (IP00)	S711-XHB-FS4	EP-401630	
---------------------------	-------------	---------------------	-----------	--


Engineering

Connection examples for S711


Standard connection (In-Line connection)

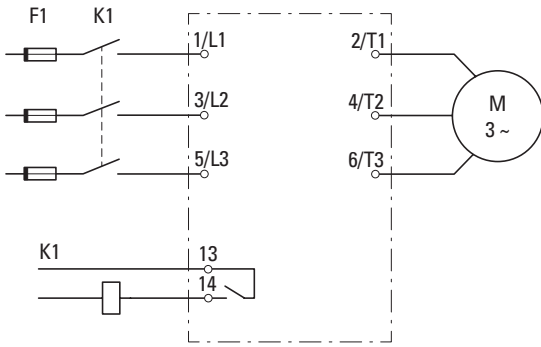


Delta circuit (inside-the-delta circuit)

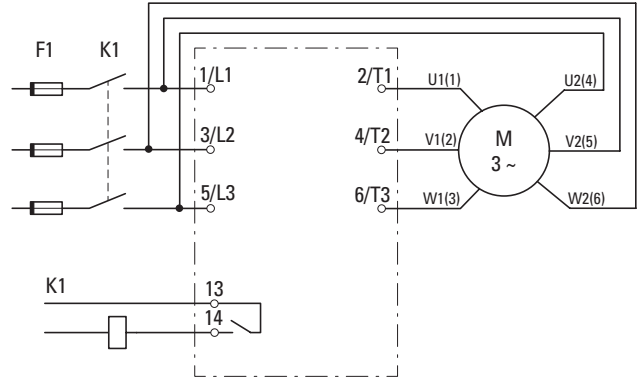

S711-34... DC

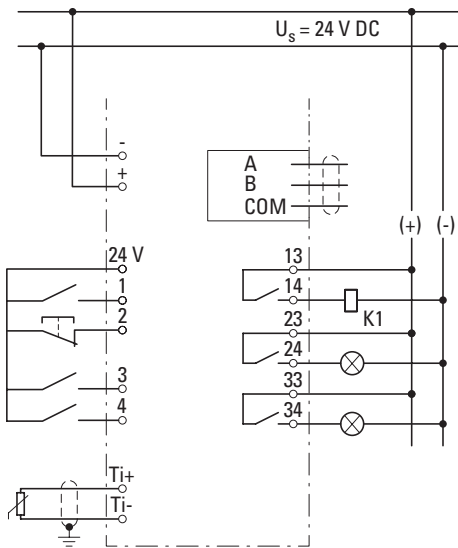

S711-34... AC

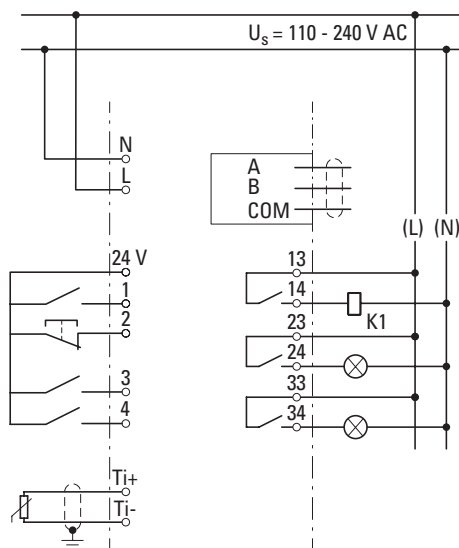

24V	24 V, 20 mA max output, for digital inputs
1	Start/Stop
2	Enable/Reset
3	Digital input 3 (default = Cmd Override: Terminal)
4	Digital input 4 (default = Ext. Fault NO)
Ti+, Ti-	Motor thermistor input
13, 14	Main contactor output
23, 24	Relay output 2 (default = Bypassed)
33, 34	Relay output 3 (default = Fault)
A, B, COM	Modbus RTU
N/-, L/+	Control voltage

Selection made easy, with the S711 Select PC tool

S711 Select is dedicated PC software designed to simplify the process of choosing the perfect soft starter for your application. Just enter your application parameters, and S711 Select will recommend the ideal model tailored to your needs. The tool calculates the maximum Full Load Amps (FLA) for your selected model, ensuring optimal performance and compatibility. With S711 Select, complex calculations become effortless, making it easy and accurate to find the right solution for your application.



Download
Eaton.com/s711



Precise derating calculation

Based on detailed S711 technical model information, S711 Select tool allows precise calculation of required starter based on application criteria.

The relevant parameters for derating include:

- Start per hour
- Ambient temperature
- Attitude
- Current Limit.
- Start time
- Stop time
- Inside Delta connection

S711 Select replacing classis derating curves

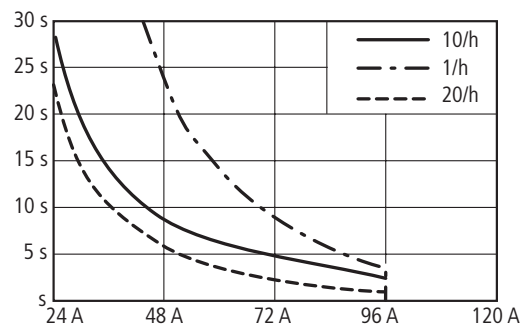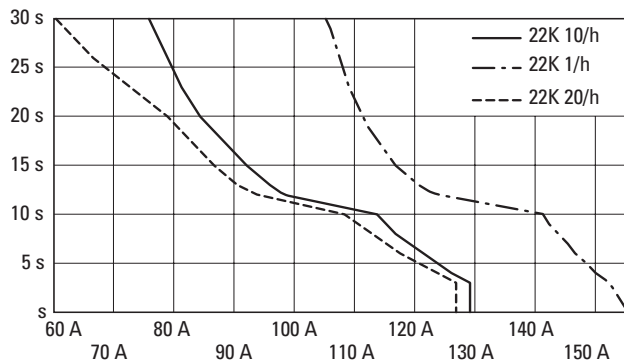

Calculate Max FLA tab, you can determine the maximum FLA that can be supported by the selected device when application parameters are modified.

Select Model tab, you can identify the recommended Model based on given application parameters



1.1

S711 soft starters

Assigned switching and protective elements for S711

S711

Model code	power rating, In-line	output current	power rating, in-delta	output current	Type 1 coordination, Class 30					Type 1 coordination, Class 10
					Fuse, In-line	MCCB, In-line	MCCB, In-line	Fuse, Inside delta	MCCB, Inside delta	MCCB, In-line
					500 V AC, 100 kA	400/415 V AC, 50 kA	400/415 V AC, 100 kA	500 V AC, 100 kA	400/415 V AC, 100 kA	400/415 V AC, 50 kA
S711-34012...	5.5	12	7.5	18	25NHG000B	PKM0-25	NZMH2-A25-BT	32NHG000B	NZMH2-A32-BT	PKM0-16
S711-34017...	7.5	17	11	25.5	32NHG000B	PKM0-32	NZMH2-A32-BT	50NHG000B	NZMH2-A50-BT	PKM0-20
S711-34025...	11	25	15	37.5	40NHG000B	NZMN1-S40	NZMH2-A50-BT	80NHG000B	NZMH2-A63-BT	PKM0-25
S711-34032...	15	32	22	48	50NHG000B	NZMN1-S63	NZMH2-A63-BT	80NHG000B	NZMH2-A100-BT	PKM0-32
S711-34047...	22	47	30	70.5	80NHG000B	NZMN1-S100	NZMH2-A100-BT	125NHG000B	NZMH2-A125-BT	NZMN1-S50
S711-34062...	30	62	45	93	100NHG000B	NZMN2-S125	NZMH2-A125-BT	160NHG000B	NZMH2-A160-BT	NZMN1-S63
S711-34075...	37	75	55	112.5	100NHG000B	NZMN2-S125	NZMH2-A160-BT	200NHG2B	NZMH2-A200-BT	NZMN1-S80
S711-34088...	45	88	75	132	125NHG000B	NZMN2-S160	NZMH2-A160-BT	224NHG2B	NZMH2-A250-BT	NZMN1-S100
S711-34115...	55	115	90	172.5	160NHG000B	NZMN3-S250	NZMH2-A200-BT	315NHG2B	NZMH2-A320-BT	NZMN2-S125
S711-34140...	75	140	110	210	200NHG2B	NZMN3-S320	NZMH2-A250-BT	400NHG3B	NZMH3-A400-BT	NZMN2-S160
S711-34170...	90	170	132	255	224NHG2B	NZMN3-S320	NZMH2-A250-BT	500NHG3B	NZMH3-A500-BT	NZMN2-S200
S711-34210...	110	210	185	315	250NHG2B	NZMN3-S400	NZMH2-A320-BT	630NHG4G	NZMH3-AX630	NZMN3-S320
S711-34250...	132	250	220	375	315NHG2B	NZMN3-S500	NZMH3-A320-BT	630NHG4G	NZMH4-AX1000 (50kA)	NZMN3-S320
S711-34320...	185	320	250	480	400NHG3B	NZMN3-AX630	NZMH3-A400-BT	800NHG4G	NZMH4-AX1000 (50kA)	NZMN3-S400
S711-34410...	220	410	315	615	425NHG3B	NZMN4-AX800	NZMH3-A500-BT	1000NHG4G	NZMH4-AX1250 (50kA)	NZMN3-S500
S711-34480...	250	480	400	720	500NHG3B	NZMN4-AX1000	NZMH3-AX630	1250NHG4G	NZMH4-AX1250 (50kA)	NZMN3-S500
S711-34560...	315	560	450	840	630NHG4G	NZMN4-AX1000	NZMH4-AX1000 (50kA)	2x 800NHG4G	NZMH4-AX1600 (50kA)	NZMN3-AX630

Assigned switching and protective elements for S711

Type 2 coordination, Class 30	High fault short circuit, Class 30			Mains contactor			
	Fuse, In-line or inside delta	MCCB, PDG	MCCB, NZM	Fuse	in-line, Class 10	In-line, Class 30	Inside delta, Class 30
600 V AC, 100 kA	480 V AC, 65 kA	480 V AC, 65 kA	600 V AC, 100 kA				
170M3008	PDG23M0030TFFJ	NZMH2-A32-BT-NA	20 A, Type J or RK5	DILM12-10(24VDC)	DILM17-10(RDC24)	DILM25(RDC24)	DILM25(RDC24)
170M3008	PDG23M0040TFFJ	NZMH2-A40-BT-NA	30 A, Type J or RK5	DILM17-10(RDC24)	DILM25(RDC24)	DILM25(RDC24)	DILM25(RDC24)
170M3009	PDG23M0060TFFJ	NZMH2-A63-BT-NA	45 A, Type J or RK5	DILM25(RDC24)	DILM32(RDC24)	DILM50(RDC24)	DILM50(RDC24)
170M3010	PDG23M0080TFFJ	NZMH2-A80-BT-NA	60 A, Type J or RK5	DILM32(RDC24)	DILM50(RDC24)	DILM50(RDC24)	DILM50(RDC24)
170M3011	PDG23M0150TFFJ	NZMH2-A125-BT-NA	80 A, Type J or RK5	DILM50(RDC24)	DILM80(RDC24)	DILM80(RDC24)	DILM80(RDC24)
170M3012	PDG23M0175TFFJ	NZMH2-A160-BT-NA	100 A, Type J	DILM65(RDC24)	DILM95(RDC24)	DILM95(RDC24)	DILM95(RDC24)
170M3013	PDG23M0175TFFJ	NZMH2-A160-BT-NA	125 A, Type J	DILM80(RDC24)	DILM115(RDC24)	DILM115(RDC24)	DILM115(RDC24)
170M3014	PDG23M0175TFFL	NZMH2-A250-BT-NA	150 A, Type J	DILM95(RDC24)	DILM115(RDC24)	DILM150(RDC24)	DILM150(RDC24)
170M3016	PDG23M0175TFFL	NZMH2-A250-BT-NA	200 A, Type J	DILM115(RDC24)	DILM185A/22(RAC240)	DILM185A/22(RAC240)	DILM185A/22(RAC240)
170M3018	PDG33M0350TFAJ	NZMH3-AX400-NA	250 A, Type J or RK5	DILM150(RDC24)	DILM225A/22(RAC240)	DILM225A/22(RAC240)	DILM225A/22(RAC240)
170M5008	PDG33M0400TFAJ	NZMH3-AX400-NA	300 A, Type J or RK5	DILM185A/22(RAC240)	DILM250/22(RA250)	DILM400/22(RA250)	DILM400/22(RA250)
170M5009	PDG33M0500TFAJ	NZMH3-AX600-NA	350 A, Type J	DILM225A/22(RAC240)	DILM400/22(RA250)	DILM400/22(RA250)	DILM400/22(RA250)
170M6008	PDG33M0600TFAJ	NZMH3-AX600-NA	400 A, Type J	DILM250/22(RA250)	DILM500/22(RA250)	DILM400/22(RA250)	DILM400/22(RA250)
170M6008	PDG43M0800TFAJ	NZMH4-AX800-NA (35 kA)	600 A, Type J or L	DILM400/22(RA250)	DILM500/22(RA250)	DILM500/22(RA250)	DILM500/22(RA250)
170M6010	PDG43M0800TFAJ	NZMH4-AX1000-NA (35 kA)	700 A, Type L	DILM500/22(RA250)	DILM580/22(RA250)	DILM650/22(RA250)	DILM650/22(RA250)
170M6011	PDG43M0800TFAJ	NZMH4-AX1200-NA (35 kA)	850 A, Type L	DILM500/22(RA250)	DILM750/22(RA250)	DILM750/22(RA250)	DILM750/22(RA250)
170M6012	PDG43M0800TFAJ (65 kA) or PDG63M1600E2NN (35 kA)	NZMH4-AX1200-NA (35 kA)	1200 A, Type L	DILM580/22(RA250)	DILM1000/22(RA250)	DILM1000/22(RA250)	DILM1000/22(RA250)

Technical specifications

	Unit	Value
Supply		
Three-phase motor voltage (L1, L2, L3)		
S711-34...	V AC	200 - 575 (+10% -15%)
Control voltage (AC: N, L; DC: -, +)		
S711-34...AC	V AC	110 - 240 (+10%/-15%)
	mA	600
S711-34...DC	V DC	24 (±20%)
	A	2.8
Mains frequency	Hz	50 - 60
Tolerance	%	10
Mains control supply and relay output		
Rated insulation voltage	V AC	300
Rated impulse withstand voltage	kV	4
Mains circuit		
Rated insulation voltage	V AC	600
Rated impulse withstand voltage	kV	6
Form designation		Bypassed, semiconductor motor starter form 1
Short circuit capability		
Coordination with MCCBs and HRC fuses		Type 1
Coordination with semiconductor fuses		Type 2
Radio and electromagnetic capability		
Radio General		EN 301 489-1
BLE		EN 301 489-17
		EN 300 328
EMC Immunity		EC 60947-4-2
EMC Emissions		IEC 60947-4-2 Class A
Inputs		
Digital input rating	V DC	Active 24
	mA	≤ 20
Motor thermistor [Ti+, Ti-]	kΩ	Triggers > 3.6
		Reset < 1.6
Outputs		
Main contactor output	V AC	10 A at 250 resistive
	V AC	5 A at 250
		AC-15 pf 0.3
Main contactor [13, 14]		N/O
Programmable output	V AC	3 A at 250 resistive
Relay output 2 [23, 24]		N/O
Relay output 3 [33, 34]		N/O
Rated insulation voltage	V AC	300
Rated impulse withstand voltage	kV	4

Technical specifications

	Unit	Value
Environmental		
Operating temperature	°C	-25 to 60 (above 40 °C with derating)
Storage temperature	°C	-40 to 70 (+70 °C < 24 hrs)
Operating altitude	m	0 - 4000 (above 1000 m with derating)
Humidity	%	5 - 95 Relative Humidity
Pollution degree		3
Vibration		IEC 60068-2-6 (Fc)
Shock		IEC 60068-2-27 (Ea)
Protection		
S711-34012... - S711-34115...		IP20
S711-34140... - S711-34560...		IP00
Keypad (when remote mounted)		IP65
Heat dissipation		
During start		
During run		
S711-34012... - S711-34047...	W	35
S711-34062... - S711-34115...	W	50
S711-34140... - S711-34250...	W	120
S711-34320... - S711-34560...	W	140
Motor overload protection		
The soft starter uses a standard overload curve for motor protection. Trip classes 5, 10, 15, 20, 30 are available.		
Operational life (internal bypass contacts)		100 000 operations
Accuracy		
Primary parameters (current, voltage, frequency)	%	± 5
Secondary parameters (power, energy, power factor)	%	± 10
Accuracy is degraded while starting and stopping.		

Size	Unit	Frame size 1:	Frame size 2:	Frame size 3:	Frame size 4:
	A	12 - 47	62 - 115	140 - 250	320 - 560
General					
Dimensions W x H x D	mm	128 x 252 x 174.5	128 x 281.3 x 190.2	202.6 x 385.3 x 218.4	222 x 545 x 204.5
Weight	kg	3.6	5.1	11.8	20.1
Terminal capacities					
Cables IEC	mm ²	6 - 50	6 - 50	95 - 240	185 - 400
Cables UL	AWG	10 - 1/0	10 - 1/0	3/0 - 500	350 - 750
Tightening torque	Nm	4	4	40	40
Control cables					
Solid	mm ²	1 x (1 - 2.5)	1 x (1 - 2.5)	1 x (1 - 2.5)	1 x (1 - 2.5)
Flexible with ferrule	mm ²	1 x (1 - 2.5)	1 x (1 - 2.5)	1 x (1 - 2.5)	1 x (1 - 2.5)
Stranded	mm ²	1 x (1 - 2.5)	1 x (1 - 2.5)	1 x (1 - 2.5)	1 x (1 - 2.5)
Solid or stranded	AWG	1 x (28 - 12)	1 x (28 - 12)	1 x (28 - 12)	1 x (28 - 12)
Tightening torque	Nm	0.5	0.5	0.5	0.5
Screwdriver (flat blade)	mm	0.6 x 3.5	0.6 x 3.5	0.6 x 3.5	0.6 x 3.5

1.1

S711 soft starters


Dimensions and weights

S711

Dimensions and weights


Frame size 1

Dimension drawings S711 - Size 1 (12 - 47 A)

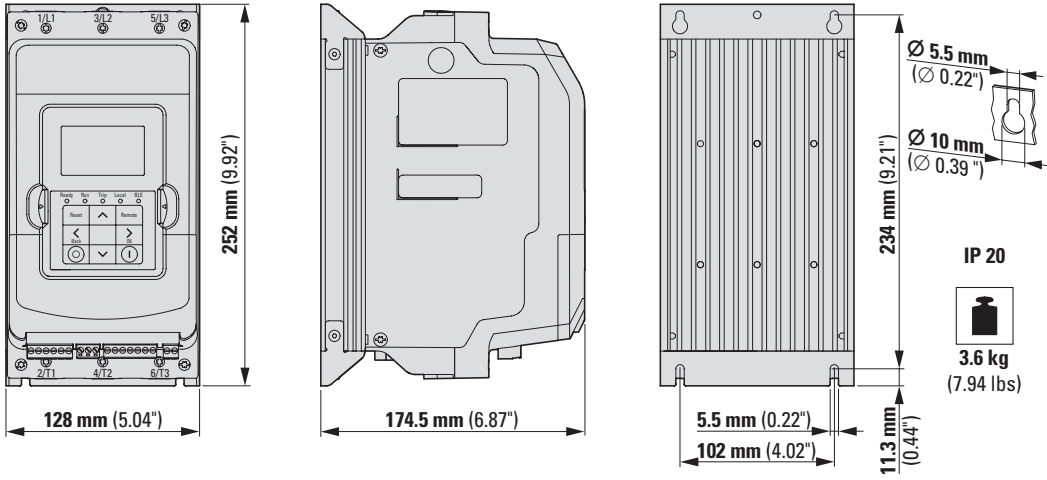

Frame size 2


Dimension drawings S711 - Size 2 (62 - 115 A)

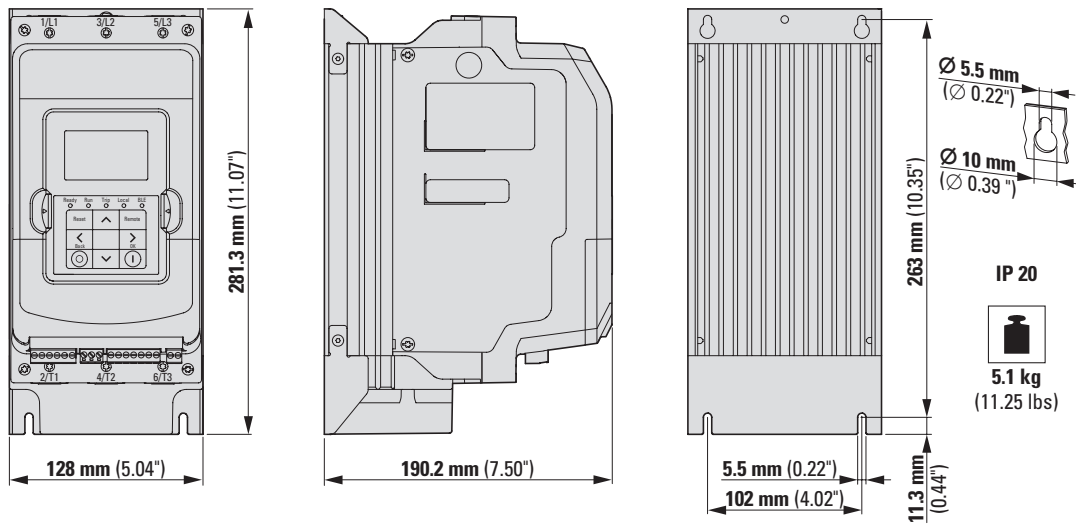

Dimensions and weights


Frame size 3

Dimension drawings S711 - Size 3 (140 – 250 A)

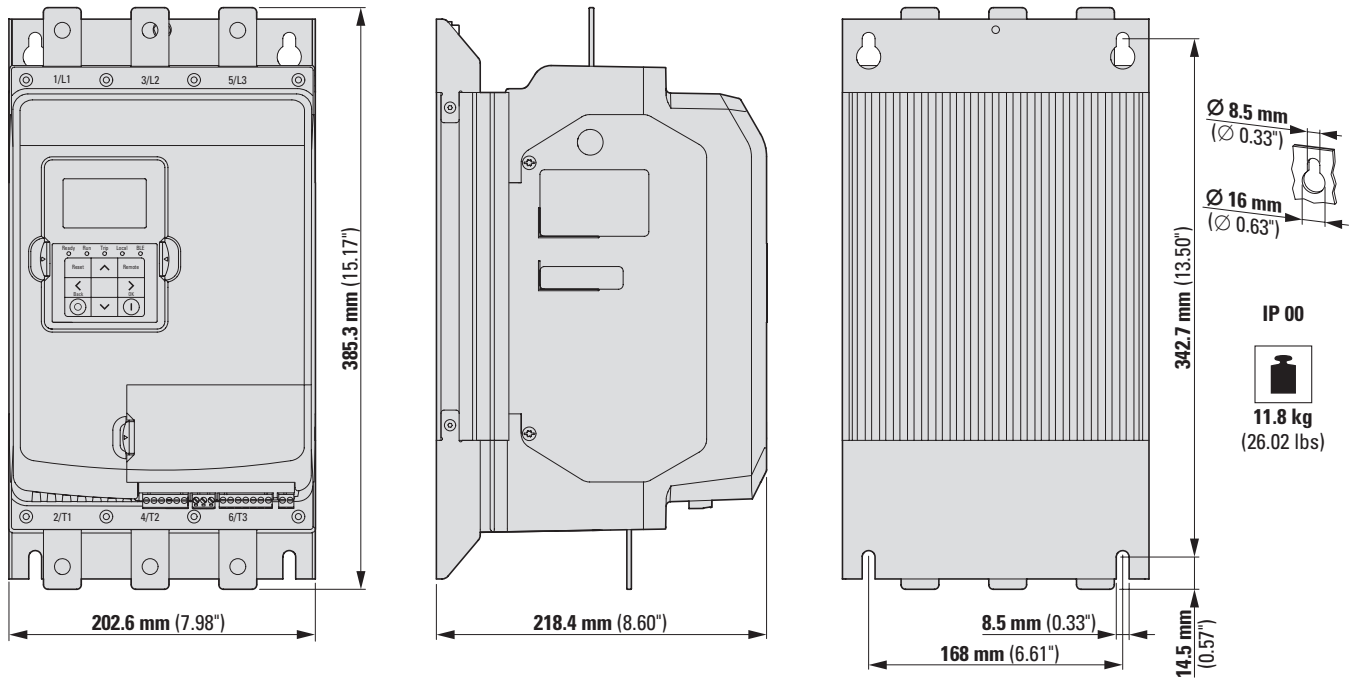

Frame size 4

Dimension drawings S711 - Size 4 (320 – 560 A)

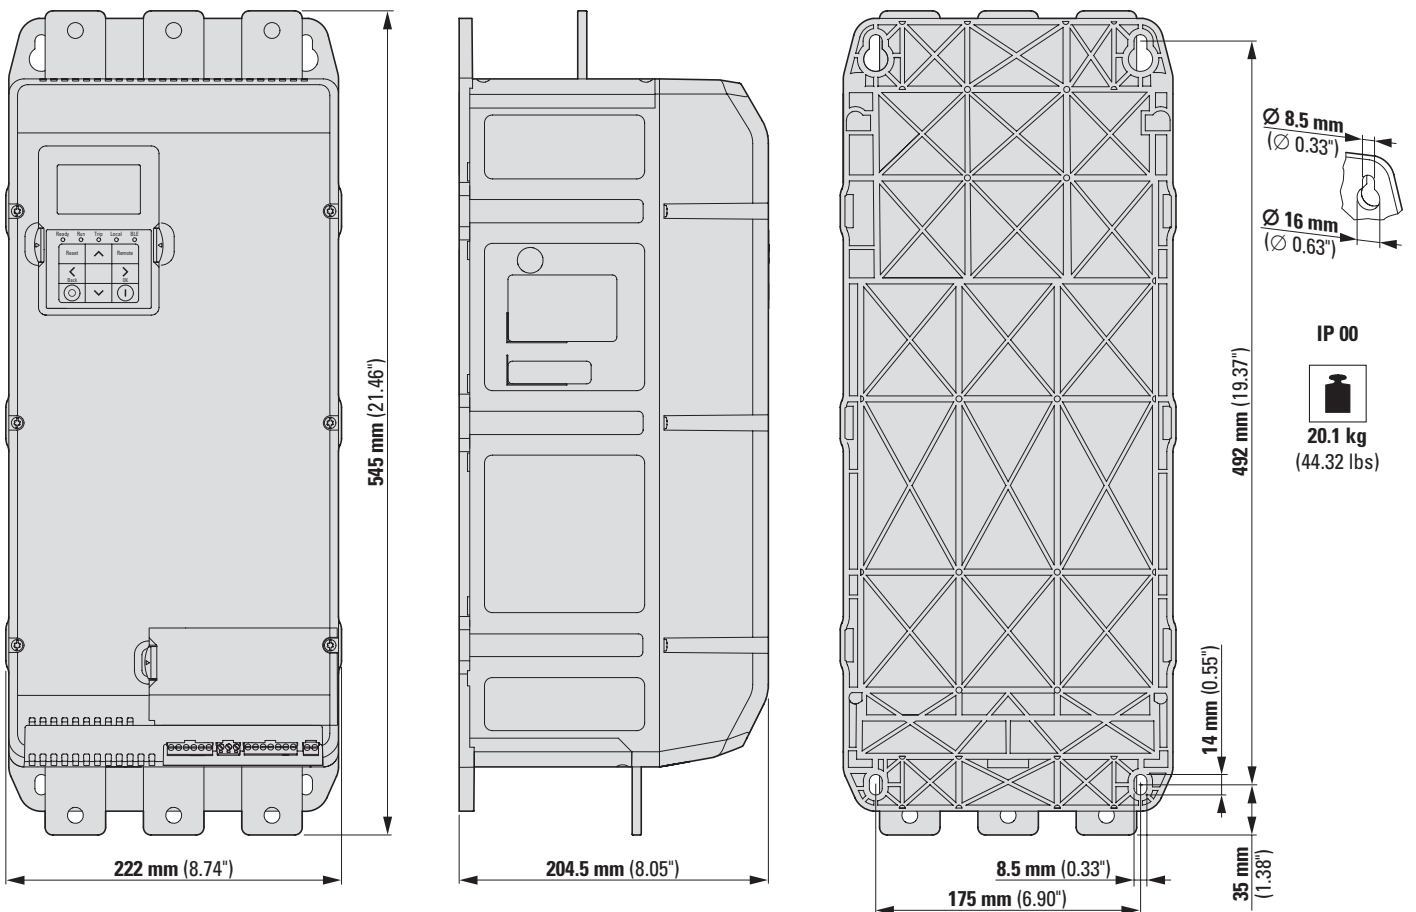



S811+ soft starters

Powerful presence in a small design

The unparalleled performance and features behind S811+ soft starters build upon the proven capabilities of our soft starters. With only five frame sizes and rated operational currents of 37 A to 1000 A for supply voltages of 200 V to 690 V, S811+ units are some of the world's smallest compact soft starters.

These three-phase-controlled soft starters, which feature an internal bypass and comprehensive monitoring and protection mechanisms, provide a soft start and ensure that three-phase motors can remain in continuous operation safely and reliably even in applications with large load torques.

Performance range:

- 37 - 1000 A
- 18.5 - 750 kW (U_n : 200 - 690 V)

Applications:

- Pumps and fans in HVAC applications
- Water/wastewater industry
- Mixers
- Crushers
- Underground applications
- Chemical industry

S811+ soft starters are not just designed for standard applications, make a strong case with their ease of use, and feature a digital control and display unit that provides access to advanced functions for sophisticated applications.

In addition, S811+ units can be used not only in a standard line (outside the delta) configuration, but also with an inside-the-delta configuration.

Features:

- Electronic overload protection
- Programmable relays and inputs
- Standard line or inside-the-delta configuration
- Pump algorithm for minimizing water hammer
- Extensive range of functionalities with comprehensive monitoring and protection functions
- Compact menu structure for easy commissioning, maintenance, and monitoring

Accessory:

- Ethernet/IP, Modbus TCP communication modules
- External keypad with display
- Terminal blocks and terminal cover
- Mounting frame
- Surge protection

For more information, visit:
Eaton.com/s811



1.2 S811+ soft starters

System overview	58
Description	59
Key to type references	60
Ordering	61
Basic devices	61
Accessories	62
Engineering	64
Technical specifications	65
Dimensions and weights	69


1.2

S811+ soft starters

System overview

System overview

S811+

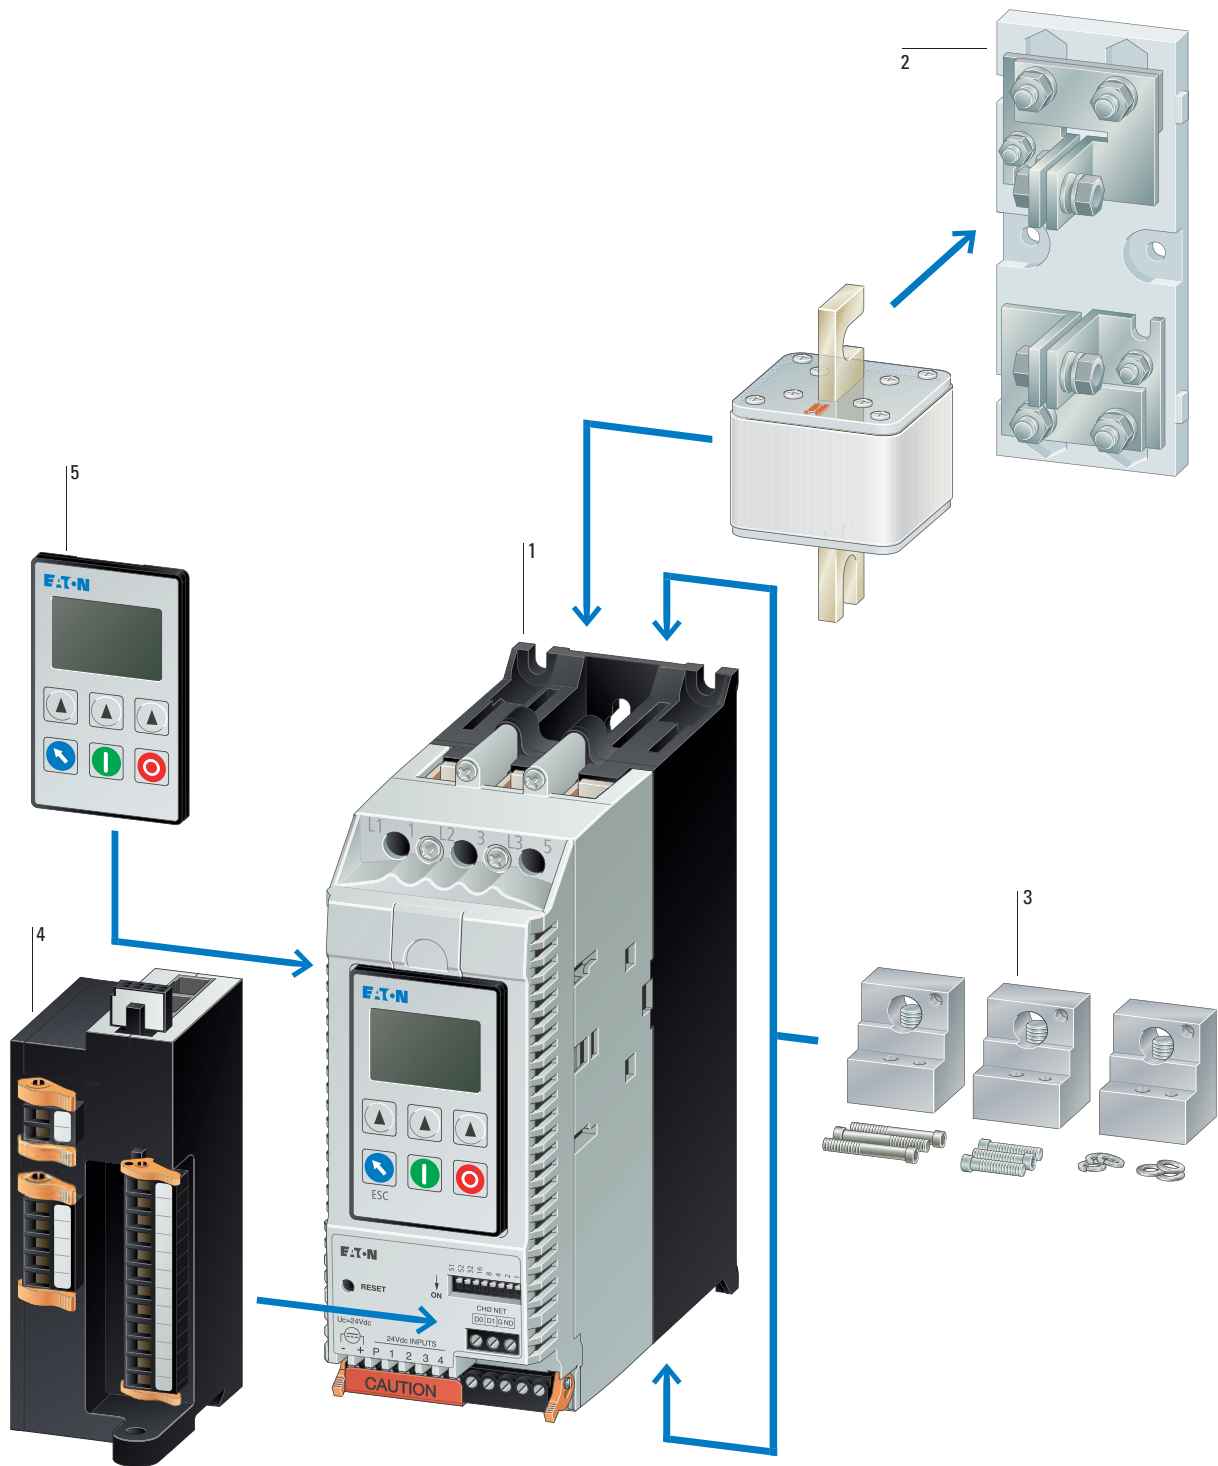

S811+ 1
→ Page 21

Superfast semiconductor fuses 2
→ Catalog "Solutions for machinery and systems"

Terminal blocks 3
→ Page 21

Ethernet/IP – Modbus/TCP adapter 4
→ Page 24

External keypad 5
→ Page 23

Description



The soft starters are designed to guarantee reliable operation even under harsh and challenging ambient conditions. This series makes a compelling case as a result of its ease of use and is the perfect choice for standard applications such as pumps, fans, compressors, and conveyor belts.

S811+ soft starters have three-phase control and are equipped with internal bypass contacts for continuous operation. With their comprehensive protection and monitoring functions, S811+ soft starters ensure a soft startup, as well as safe and reliable continuous operation, for three-phase motors with rated operational currents of 37 A to 1000 A when working with mains voltages of 200 V to 690 V. For example, when used in pump applications, they prevent water impact by using controlled deceleration (soft stop control) and torque monitoring, significantly reducing the mechanical loads exerted on pump systems in the process.

S811+ essential characteristics

- Rated operational current: 37 - 1000 A
- Parameterizable overload settings: 31 - 100%
- Adjustable overload classes: class 5, 10, 20, 30
- Base setting: 15 s start ramp, 4 starts per hour, 300% starting current at 40 °C ambient temperature
- Allocated motor outputs for In-Line connection:
 - 7.5 - 250 kW (3~ 230 V)
 - 18.5 - 450 kW (3~ 400 V)
- Ambient air temperature: -30 °C to +50 °C
- any required mounting position
- Degree of protection with compact design (IP20 optional)
- 5 compact designs
- Adjustable torque control
- Adjustable kick start
- Efficient use of power achieved with internal bypass contacts during continuous operation
- 24 V control voltage:
 - External power required
 - 1 A continuous current
 - 10 A inrush current (peak value for 150 ms)

When using S811+ soft starters, motors can be connected either using a standard line (outside the delta) configuration or an inside-the-delta configuration. Using an inside-the-delta configuration will reduce the current flowing through the soft starter by approximately 42%. This way, a 58 A soft starter can be used to start and run a motor with a rated operational current of 100 A, for example.



Important operating unit characteristics (S811+)

- Language-neutral LCD display with backlight
- Easy to use and configure with function keys
- System parameter configuration
- Diagnostic and monitoring options
- Reading display (e.g., L1, L2, L3 phase currents)
- Error display
- Offset placement (mounted on door), connection via plug-in patch cord with RJ11 plug
- Front IP54

S811+ specific characteristics

- Mains voltage up to 690 V
- Allocated motor outputs for In-Line connection:
 - 7.5 - 250 kW (3~ 230 V)
 - 18.5 - 450 kW (3~ 400 V)
 - 160 - 710 kW (3~ 690 V)
- Special pump control algorithm with prolonged soft stop ramp
- Inside-the-delta configuration; please refer to "Engineering, connecting examples"
- RS485 Modbus connection
- Ethernet/IP, Modbus-TCP with option C441 (communication adapter).


1.2

S811+ soft starters

Key to type references

Key to type references

S811+

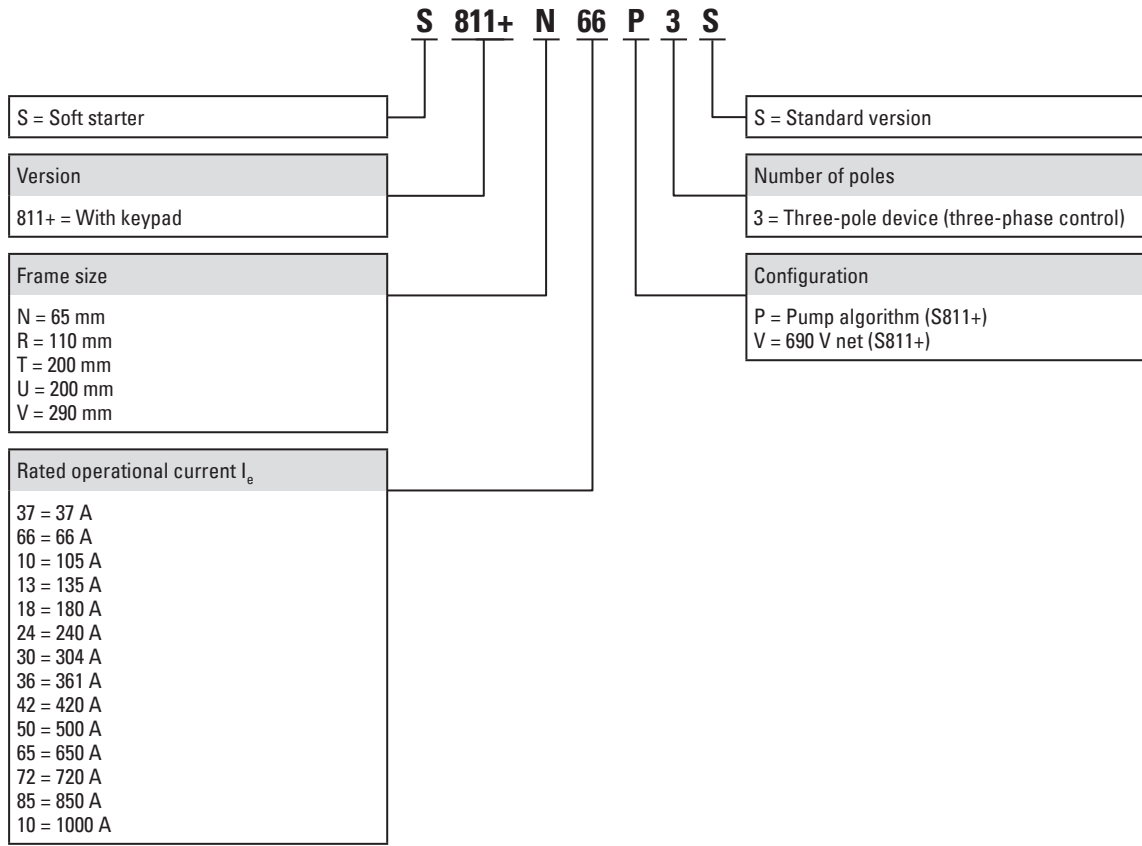

Ordering

Frame size	Rated operational current Device (AC-53) I_e A	Assigned motor output					Model code	Catalog number	Std. pack
		at 230 V, 50 Hz kW	at 230 V, 60 Hz HP	at 400 V, 50 Hz kW	at 460 V, 60 Hz HP	at 690 V, 50 Hz kW			

Soft starters

Supply voltage U_c : 24 V DC
 Control voltage U_c : 24 V DC
 With internal bypass contacts
 Terminal blocks for the terminals are required for frame sizes T, U, and V
 → Accessories


Soft starter for three-phase loads, with control unit and pump algorithm
 Mains supply voltage (50/60 Hz) U_{LN} : 200 - 600 V AC
 In-Line configuration/In-Delta configuration

N	37	7.5	10	18.5	25	—	S811+N37P3S	168977	1 unit
	66	18.5	20	30	50	—	S811+N66P3S	168979	
R	105	30	40	55	75	—	S811+R10P3S	168981	1 unit
	135	37	50	75	100	—	S811+R13P3S	168983	
T	180	55	60	90	150	—	S811+T18P3S	168985	1 unit
	240	75	75	132	200	—	S811+T24P3S	168988	
	304	90	100	160	250	—	S811+T30P3S	168991	
U	361	110	125	200	300	—	S811+U36P3S	169872	1 unit
	420	132	150	200	350	—	S811+U42P3S	169873	
V	361	110	125	200	300	—	S811+V36P3S	168994	1 unit
	420	132	150	200	350	—	S811+V42P3S	168997	
	500	160	200	250	400	—	S811+V50P3S	169000	
	650	200	250	315	500	—	S811+V65P3S	169003	
	720	250	—	400	600	—	S811+V72P3S	169006	
	850	—	—	450	600	—	S811+V85P3S	169009	
1000	—	—	450	600	—	S811+V10P3S	169012		

Soft starter for three-phase loads, with control unit and pump algorithm, for 690 V grids
 Mains supply voltage (50/60 Hz) U_{LN} : 200 - 690 V AC
 In-Line circuit

T	180	55	60	90	150	160	S811+T18V3S	168986	1 unit
	304	90	100	160	250	250	S811+T30V3S	168992	
V	361	110	150	200	300	315	S811+V36V3S	168995	1 unit
	420	132	150	200	350	400	S811+V42V3S	168998	
	500	160	200	250	400	500	S811+V50V3S	169001	
	650	200	250	315	500	630	S811+V65V3S	169004	
	720	250	—	400	600	630	S811+V72V3S	169007	
	850	—	—	450	600	710	S811+V85V3S	169010	

S811+ frame sizes

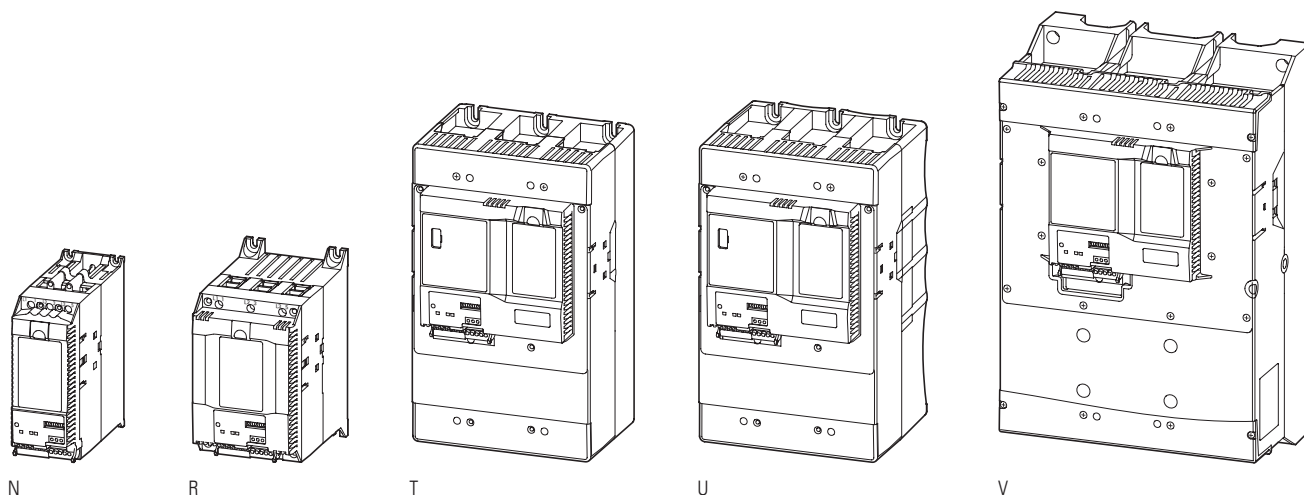

1.2

S811+ soft starters

Accessories

S811+



Description	For use with	Model code Catalog number	Std. pack
-------------	--------------	---------------------------------	-----------

Keypad

With illuminated LCD display with control buttons and function keys Front IP54 RJ11 plug, 6-pin	S811+	EMA91 144570	1 unit
--	-------	------------------------	--------

Shroud


Protection for installation space in S811+ if the control unit is set up externally.	S811+	EMA68 144556	1 unit
--	-------	------------------------	--------

Mounting frame

For mounting the EMA91 control unit externally with surface mounting (e.g., installation in control panel door).

with connection cable RJ11, 6 pole	1 m	EMA91	EMA69A 144557	1 unit
	1.5 m	EMA91	EMA69B 144558	
	2 m	EMA91	EMA69C 144559	
	3 m	EMA91	EMA69D 144560	

Fieldbus modules



Ethernet/IP, Modbus-TCP	S811+	C441V 172306	1 unit
-------------------------	-------	------------------------	--------


PROFIBUS-DP	S811+	C441QS 184746	1 unit
-------------	-------	-------------------------	--------

DeviceNet	S811+	C441LS 184747	1 unit
-----------	-------	-------------------------	--------

Control terminal strip

Spare part	S811+	EMA75 144561	1 unit
------------	-------	------------------------	--------


Terminal blocks



Tools with dimensions in inches required
1 set required for each connection side.

Terminal capacities			
2 x 4-1/0MCM, 2 x 25 - 50 mm ²	S811+, frame sizes T and U	EML22 127661	1 unit
4/0-500 MCM, 120 - 240 mm ² S811+, frame sizes T and U		EML23 127662	
2 x 4/0-500 MCM, 2 x 120 - 240 mm ² S811+, frame sizes T and U		EML24 127663	
1 x 2/0-300 MCM, 1 x 70 - 150 mm ² S811+, frame sizes T and U		EML25 127664	
2 x 2/0-300 MCM, 2 x 70 - 150 mm ² S811+, frame sizes T and U		EML26 127665	
2 x 4/0-500 MCM, 2 x 120 - 240 mm ² S811+, frame size V	S811+, frame size V	EML28 127666	
4 x 4/0-500 MCM, 4 x 120 - 240 mm ² S811+, frame size V		EML30 127667	
6 x 4/0-500 MCM, 6 x 120 - 240 mm ² S811+, frame size V		EML32 127668	
4 x 2/0-300 MCM, 4 x 70 - 150 mm ² S811+, frame size V		EML33 127669	


Description	For use with	Model code Catalog number	Std. pack
Terminal cover			
For increasing the degree of protection to IP20 1 set required for each connection side.	S811+, frame size N	SS-IP20-N 171990	1 unit
	S811+, frame size R	SS-IP20-R 171991	
	S811+, frame sizes T and U	SS-IP20-TU 171992	
	S811+, frame size V	SS-IP20-V 158650	
Surge protection			
SMD metal-oxide varistors (MOVs) with connection cables for the grid and motor connection sides	S811+, up to 600 V	EMS39 127671	1 unit
	S811+, up to 690 V	EMS41 127672	
Power supplies PSG			
Rated output voltage 24 V DC (+2%) Rated output current: 10 A			
Nominal input voltage 90 - 264 V AC 90 - 24 V DC Single-phase		PSG240E24SMB EP-401395	
	Nominal input voltage 320 - 575 V AC 320 - 24 V DC Three-phase	PSG240F24SMB EP-401399	




Engineering

Connection examples for S811+...N3S

Standard connection (In-Line connection)

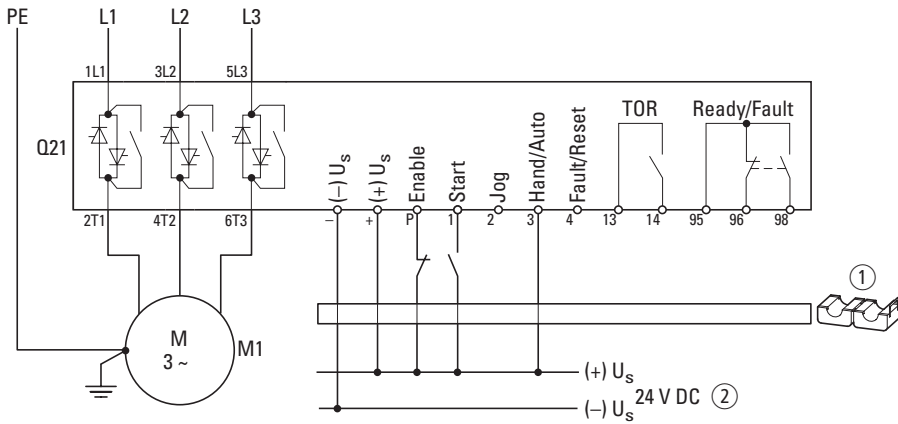

Delta circuit (inside-the-delta circuit)

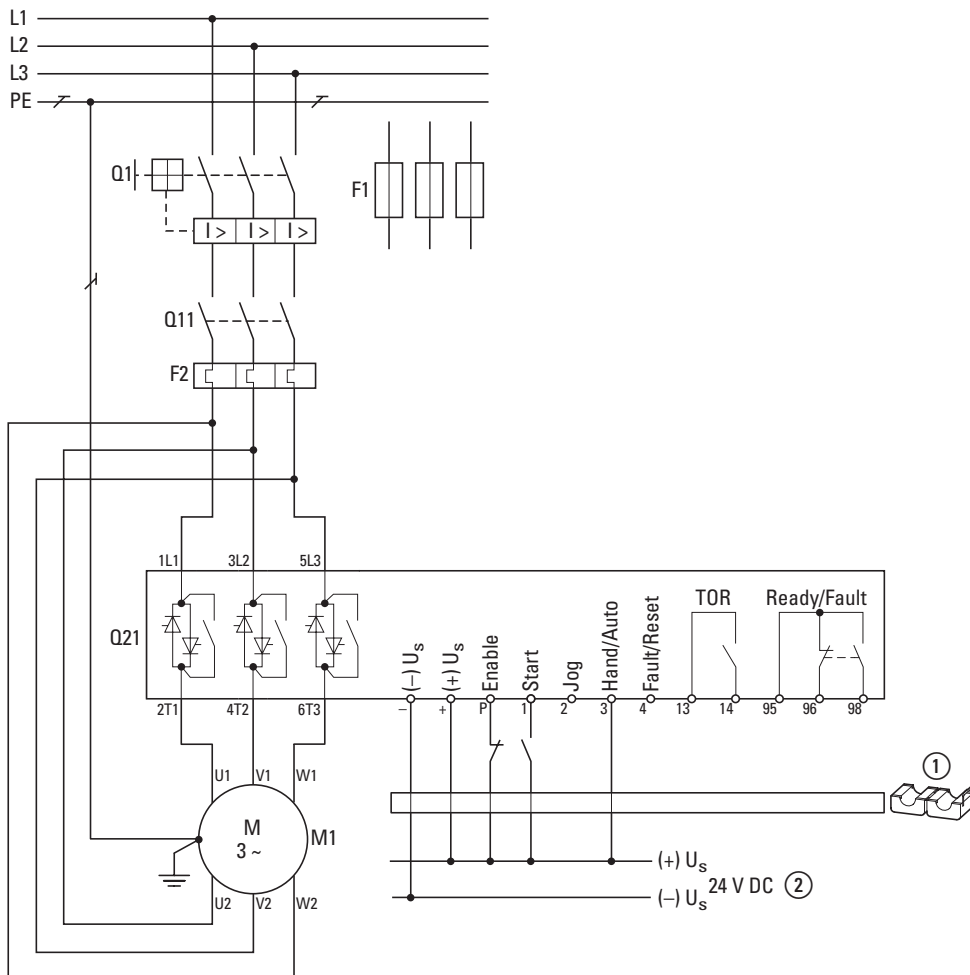

① Snap-on ferrite core, included as standard

② External control voltage (24 V DC) required, I_s 1 A, I_{Peak} = 10 A for 150 ms when bypass contacts are switched
Short-circuit and cable protection: Q1 circuit breakers or F1 fuses.

Motor	IEC	NEMA
	U1-V1-W1	T1-T2-T3
	U2-V2-W2	T4-T5-T6

Technical specifications

Description	Specification
Temperature range	
Operation	-40° to 50 °C
Storage	-50° to 70 °C
Altitude above sea level	Up to 2000 m; derating of 0.5% for every 100 m above 2000 m
Humidity	Can be used up to 95%, non-condensing
Damp heat, constant, to IEC 60068-2-3	✓
Damp heat, cyclic, to IEC 60068-2-10	✓
Vibration resistance	
Operation	3 g in all directions
Not in operation	3 g in all directions
Protection type	
Protection type	IP20 (terminals IP00)
An IP20 degree of protection can be achieved on all sides by using optional terminal covers SS-IP20-N.	✓
Overvoltage category/pollution degree	II/3
Radio interference level (IEC/EN 55011)	A
Position for operation	Any
Pollution degree IEC 60947-1	3
Impact resistance	15 g in all directions

1.2

S811+ soft starters

Technical specifications

S811+

Frame size
N

General

Actuating circuit

Digital inputs

Control voltage (DC operated)			24 V DC $\pm 10\%$
Current consumption 24 V		mA	
External 24 V		mA	150
External 24 V (no load)		mA	100

Pick-up voltage, DC operated	$x U_s$	V DC	21.6 - 26.4
Drop-out voltage, DC operated	$x U_s$	V DC	max. 3 V DC
Pick-up time		ms	100
Falling time		ms	100

Regulator supply

Voltage	U_s	V	24 V DC $\pm 10\%$
Current consumption	I_e	mA	< 1000
Current consumption at peak performance (close bypass) at 24 V DC	I_{Peak}	A/ms	10/150
External supply voltage			✓

Analog inputs

Number of 4 - 20 mA current inputs			1
------------------------------------	--	--	---

Relay outputs

Number of 120 V AC/DC ; 3 A, AC-11			2
Fully programmable			✓

Soft start function

Ramp times

Acceleration time	s	0.5 - 360
Deceleration time	s	0 - 120

Start voltage

Max. start voltage	%	85
--------------------	---	----

Kick-start

Voltage		
Max kick-start voltage	%	85
Max. kick-start duration 50/60 Hz	ms	2000

Functions

Fast switching (semiconductor contactor)		– (minimum ramp time 1 s)
Soft start function		✓
Suppression of closing transients		✓
Current limitation		✓
Overload detection		✓
Underload monitoring		✓
Fault log	Errors	10
Suppression of DC components on motors		✓
Potential isolation between power section and control section		✓
Modbus RTU communication interface		✓

Product range

Internal bypass contacts			✓
Soft starter for three-phase loads, with control unit and pump algorithm			✓
200 - 600 V mains supply voltage (50/60 Hz)	U_{LN}	V AC	✓
200 - 690 V mains supply voltage (50/60 Hz)	U_{LN}	V AC	–
24 V supply voltage	U_s	V DC	✓
24 V control voltage	U_c	V DC	✓
Startup class			CLASS 10 (star-delta replacement) CLASS 20 (heavy starting duty, 3 x I_e for 45 s) CLASS 30 (6 x I_e for 30 s)

Terminal blocks for the terminals are required (accessories)

	Frame size			
	R	T	U	V
General				
Actuating circuit				
Digital inputs				
Control voltage (DC operated)	24 V DC $\pm 10\%$	24 V DC $\pm 10\%$	24 V DC $\pm 10\%$	24 V DC $\pm 10\%$
Current consumption 24 V				
External 24 V	150	150	150	150
External 24 V (no load)	100	100	100	100
Pick-up voltage, DC operated	21.6 - 26.4	21.6 - 26.4	21.6 - 26.4	21.6 - 26.4
Drop-out voltage, DC operated	max. 3 V DC	max. 3 V DC	max. 3 V DC	max. 3 V DC
Pick-up time	100	100	100	100
Falling time	100	100	100	100
Regulator supply				
Voltage	24 V DC $\pm 10\%$	24 V DC $\pm 10\%$	24 V DC $\pm 10\%$	24 V DC $\pm 10\%$
Current consumption	< 1000	< 1000	< 1000	< 1400
Current consumption at peak performance (close bypass) at 24 V DC	10/150	10/150	10/150	10/150
External supply voltage	✓	✓	✓	✓
Analog inputs				
Number of 4 - 20 mA current inputs	1	1	1	1
Relay outputs				
Number of 120 V AC/DC ; 3 A, AC-11	2	2	2	2
Fully programmable	✓	✓	✓	✓
Soft start function				
Ramp times				
Acceleration time	0.5 - 360	0.5 - 360	0.5 - 360	0.5 - 360
Deceleration time	0 - 120	0 - 120	0 - 120	0 - 120
Start voltage				
Max. start voltage	85	85	85	85
Kick-start				
Voltage				
Max kick-start voltage	85	85	85	85
Max. kick-start duration 50/60 Hz	2000	2000	2000	2000
Functions				
Fast switching (semiconductor contactor)	– (minimum ramp time 1 s)	– (minimum ramp time 1 s)	– (minimum ramp time 1 s)	– (minimum ramp time 1 s)
Soft start function	✓	✓	✓	✓
Suppression of closing transients	✓	✓	✓	✓
Current limitation	✓	✓	✓	✓
Overload detection	✓	✓	✓	✓
Underload monitoring	✓	✓	✓	✓
Fault log	10	10	10	10
Suppression of DC components on motors	✓	✓	✓	✓
Potential isolation between power section and control section	✓	✓	✓	✓
Modbus RTU communication interface	✓	✓	✓	✓
Product range				
Internal bypass contacts	✓	✓	✓	✓
Soft starter for three-phase loads, with control unit and pump algorithm	✓	✓	✓	✓
200 - 600 V mains supply voltage (50/60 Hz)	✓	✓	✓	✓
200 - 690 V mains supply voltage (50/60 Hz)	–	✓	–	✓
24 V supply voltage	✓	✓	✓	✓
24 V control voltage	✓	✓	✓	✓
Startup class	CLASS 10 (star-delta replacement) CLASS 20 (heavy starting duty, 3 x I _b for 45 s) CLASS 30 (6 x I _b for 30 s)	CLASS 10 (star-delta replacement) CLASS 20 (heavy starting duty, 3 x I _b for 45 s) CLASS 30 (6 x I _b for 30 s)	CLASS 10 (star-delta replacement) CLASS 20 (heavy starting duty, 3 x I _b for 45 s) CLASS 30 (6 x I _b for 30 s)	CLASS 10 (star-delta replacement) CLASS 20 (heavy starting duty, 3 x I _b for 45 s) CLASS 30 (6 x I _b for 30 s)
Terminal blocks for the terminals are required (accessories)	–	✓	✓	✓

1.2


S811+ soft starters

Technical specifications

Tested switchgear combinations for In-Line and In-Delta connections

Soft starter S811+ offers a flexibly adjustable internal motor protection function. Motor current and overload class can be set up to class 30, eliminating the need for an external overload relay. The measured current can be read out of the internal Modbus interface for further use in the process. The S811+ requires only the circuit breaker NZM against short circuiting of the motor lines to achieve full motor output. The "In-Delta" connection is only possible with S811+, as it necessitates an extra mains contactor that is not required for "In-Line" operation.

S811+

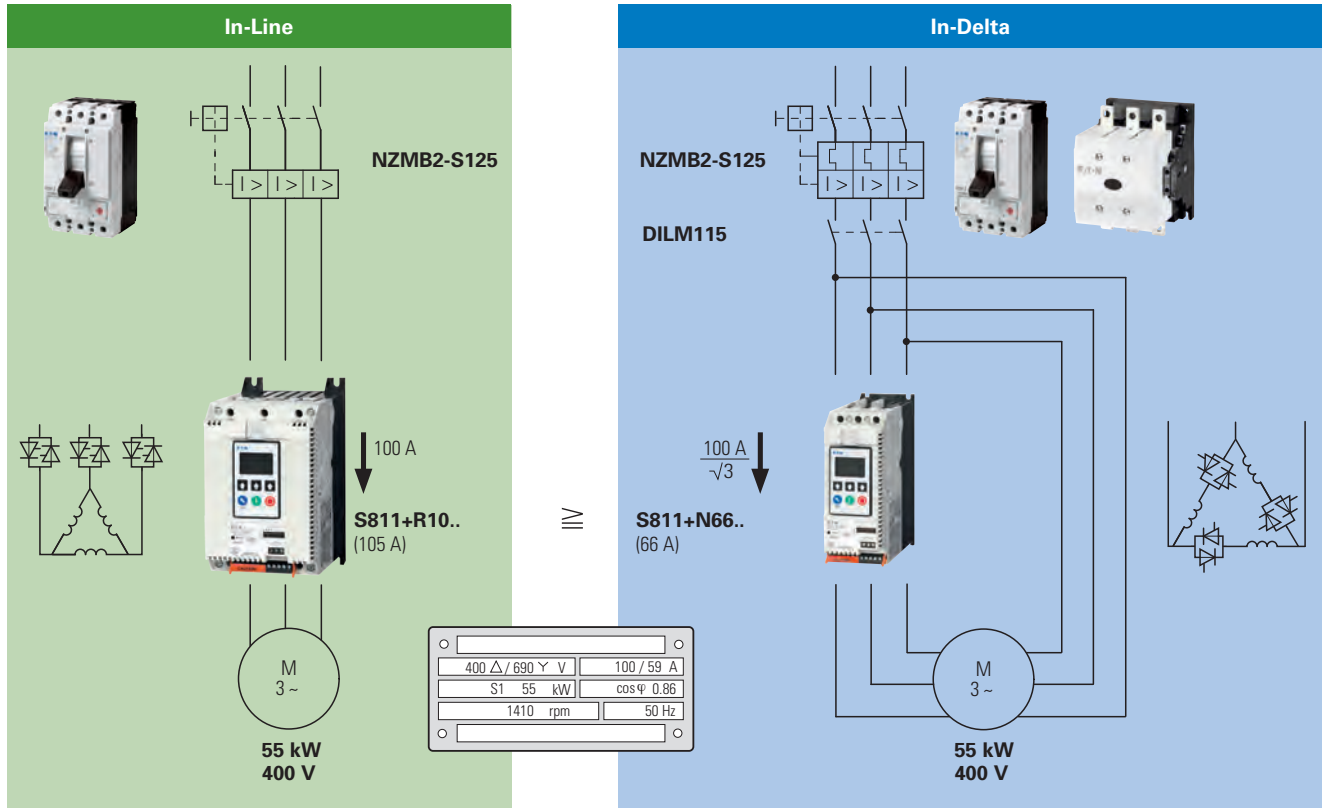


Rated operational current [A]	assigned motor power at 400 V [kW]	assigned motor power at 480 V [HP]	Soft starters	Soft starters	Mains contactor*	Cable protection Model code
			In-Line Model code	In-Delta Model code		
37	18.5	25	S811+N37P3S			PKM4-40
66	30	50	S811+N66P3S	S811+N37P3S	DILM72	NZMN1-S80
105	55	75	S811+R10P3S	S811+N66P3S	DILM115	NZMN2-S125
135	75	100	S811+R13P3S			NZMN2-S160
180	90	150	S811+T18P3S	S811+R10P3S	DILM185A	NZMN2-S200
240	132	200	S811+T24P3S	S811+R13P3S	DILM250	NZMN3-S250
304	160	250	S811+T30P3S	S811+T18P3S	DILM400	NZMN3-S320
360	200	250	S811+U36P3S	S811+T24P3S	DILM400	NZMN3-S400
360	200	250	S811+V36P3S			NZMN3-S400
420	200	350	S811+U42P3S			NZMN3-S500
420	200	350	S811+V42P3S			NZMN3-S500
500	250	400	S811+V50P3S	S811+T30P3S	DILM580	NZMN3-S500
650	315	500	S811+V65P3S	S811+U36P3S	DILM750	NZMN4-ME875
720	400	600	S811+V72P3S	S811+U42P3S	DILM750	NZMN4-ME875
850	450	600	S811+V85P3S	S811+V50P3S	DILM1000	NZMN4-ME875
1125	630	850		S811+V65P3S	DILM1600	NZMN4-ME1400
1246	630	850		S811+V72P3S	DILM1600	NZMN4-ME1400
1471	750	1100		S811+V85P3S	DILM1600	IZMX16...

(* Switch only when stopped)

Dimensions and weights


S811+N...

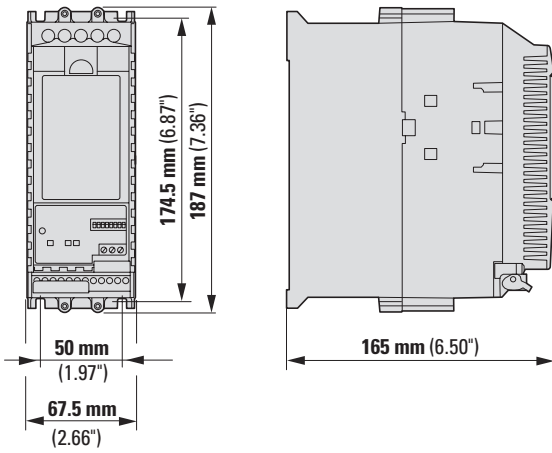

Model code	Weight [kg]
S811+N37...	2.6
S811+N66...	

S811+

S811+R...

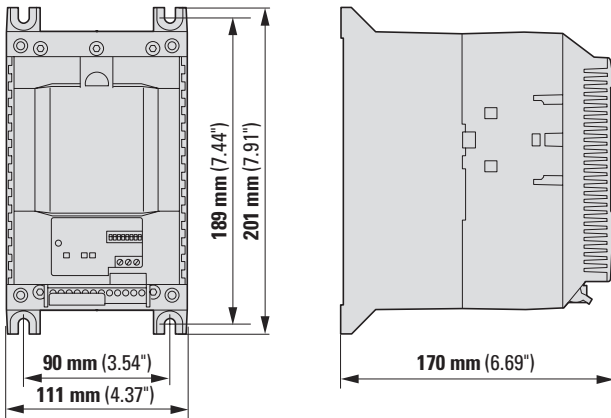

Model code	Weight [kg]
S811+R10...	4.8
S811+R13...	


1.2

S811+ soft starters

Dimensions and weights


S811+

S811+T...

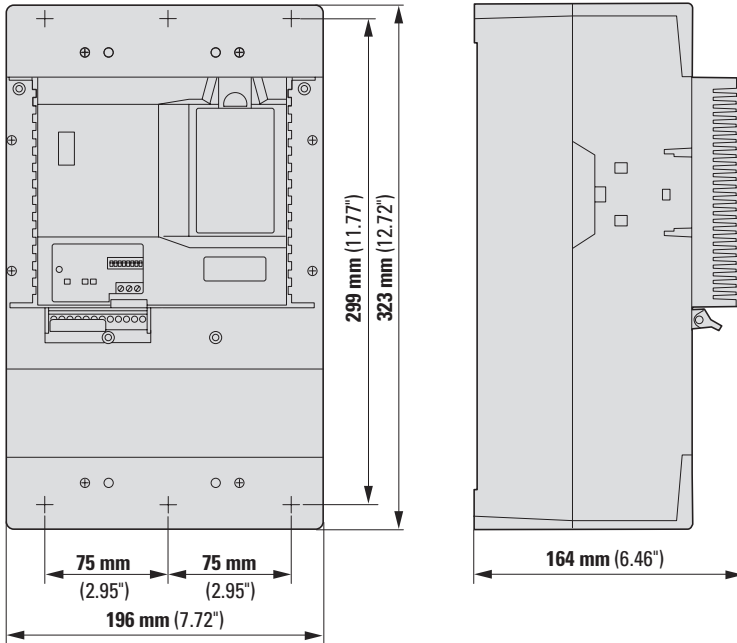



Model code	Weight [kg]
S811+T18...	18.6
S811+T24...	
S811+T30...	

S811+U...

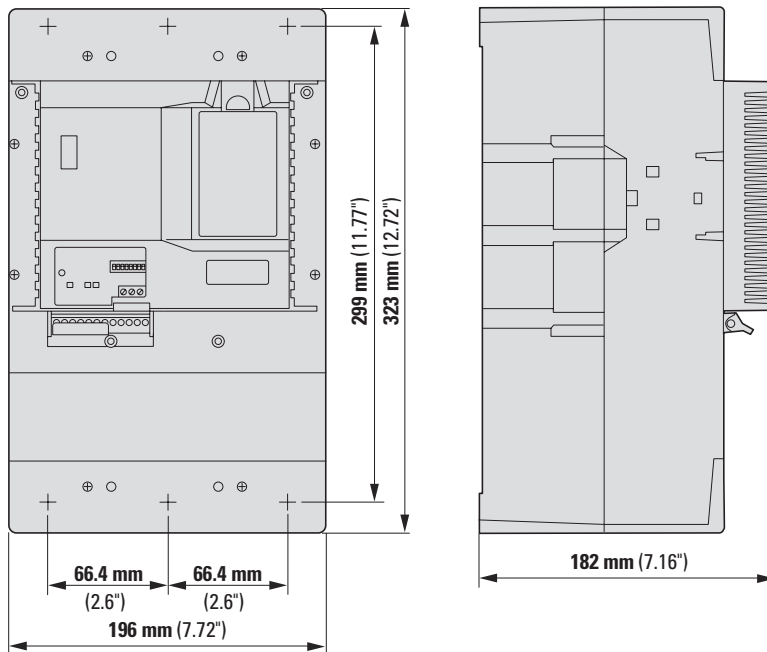

Model code	Weight [kg]
S811+U36...	18.6
S811+U42...	
S811+U50...	

S811+V...

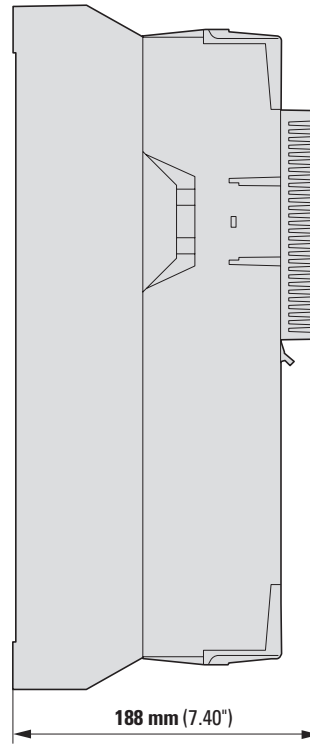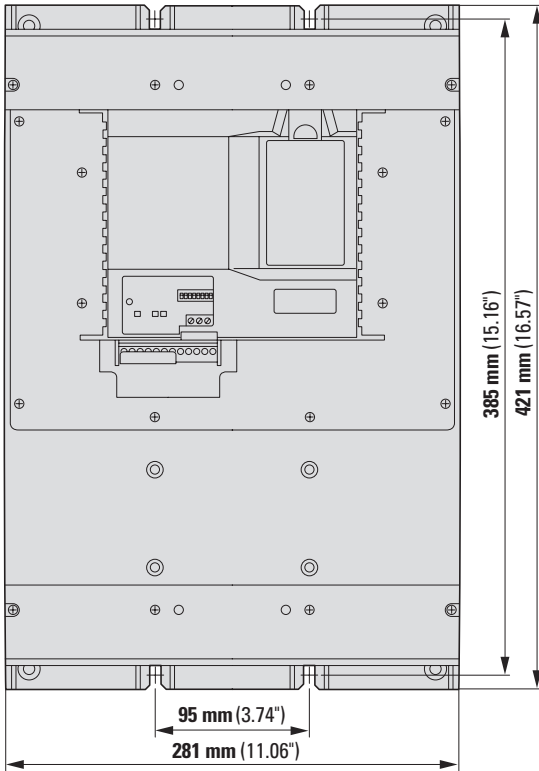

Model code	Weight [kg]
S811+V36...	41.4
S811+V42...	
S811+V50...	
S811+V65...	
S811+V72...	
S811+V85...	
S811+V10...	

S811+



PowerXL DE1 variable speed starter

The PowerXL DE1 variable speed starter offers simple handling and highest reliability while at the same time variable motor speed and improved energy efficiency of the

machine. This category of devices is the first to close the gap between conventional motor starters and variable frequency drives and combine all the advantages in a single unit.

Performance range:

- 0.25 - 2.2 kW (U_g : 1~ 230 V, U_2 : 3~ 230 V)
- 0.37 - 7.5 kW (U_g : 3~ 400 V, U_2 : 3~ 400 V)

Applications:

- Fans, pumps
- Simple machines
- Retrofits in machines and systems in order to replace conventional motor starters or contactors for motor control

Features:

- Compact: 45 mm width
- Out-of-the-box commissioning without parameterization
- No special drives engineering skills or knowledge required
- Screwdriver parameterization can be set with DXE-EXT-SET optional configuration module
- Trip-free-design ensures maximum machine availability
- Suitable for use in ambient temperatures of up to 60 °C
- DE11 with on-board CANopen, removable control signal terminal strip, and programmable relay output
- International standards (CE, UL, cUL, cTick, RoHS)


Accessory:

- Plug-in configuration module
- Plug-in communication modules: SmartWire-DT, Ethernet/IP, PROFINET (PROFIdrive)
- External LED keypad
- Mains chokes
- Motor chokes
- External EMC filter
- Parameter storage unit and Bluetooth communication stick
- drivesConnect parameter configuration software
- drivesConnect mobile App (iOS, Android)

For more information, visit:
[Eaton.com/de1](https://www.eaton.com/de1)



2.1 DE1 variable speed starter up to 7.5 kW	
System overview	74
Key to type references	75
Sizes and degree of protection	75
Ordering	76
DE1, for three-phase motors 230 V/400 V, IP20	76
DE11, for three-phase motors 230 V/400 V, IP20	77
Accessories	78
Engineering	79
Block diagram	79
Assigned switching and protective elements for DE1	80
Technical specifications	82
General rated operational data	82
Specific rated operational data	83
Dimensions and weights	89




2.1

DE1 variable speed starter up to 7.5 kW

System overview

System overview

DE1

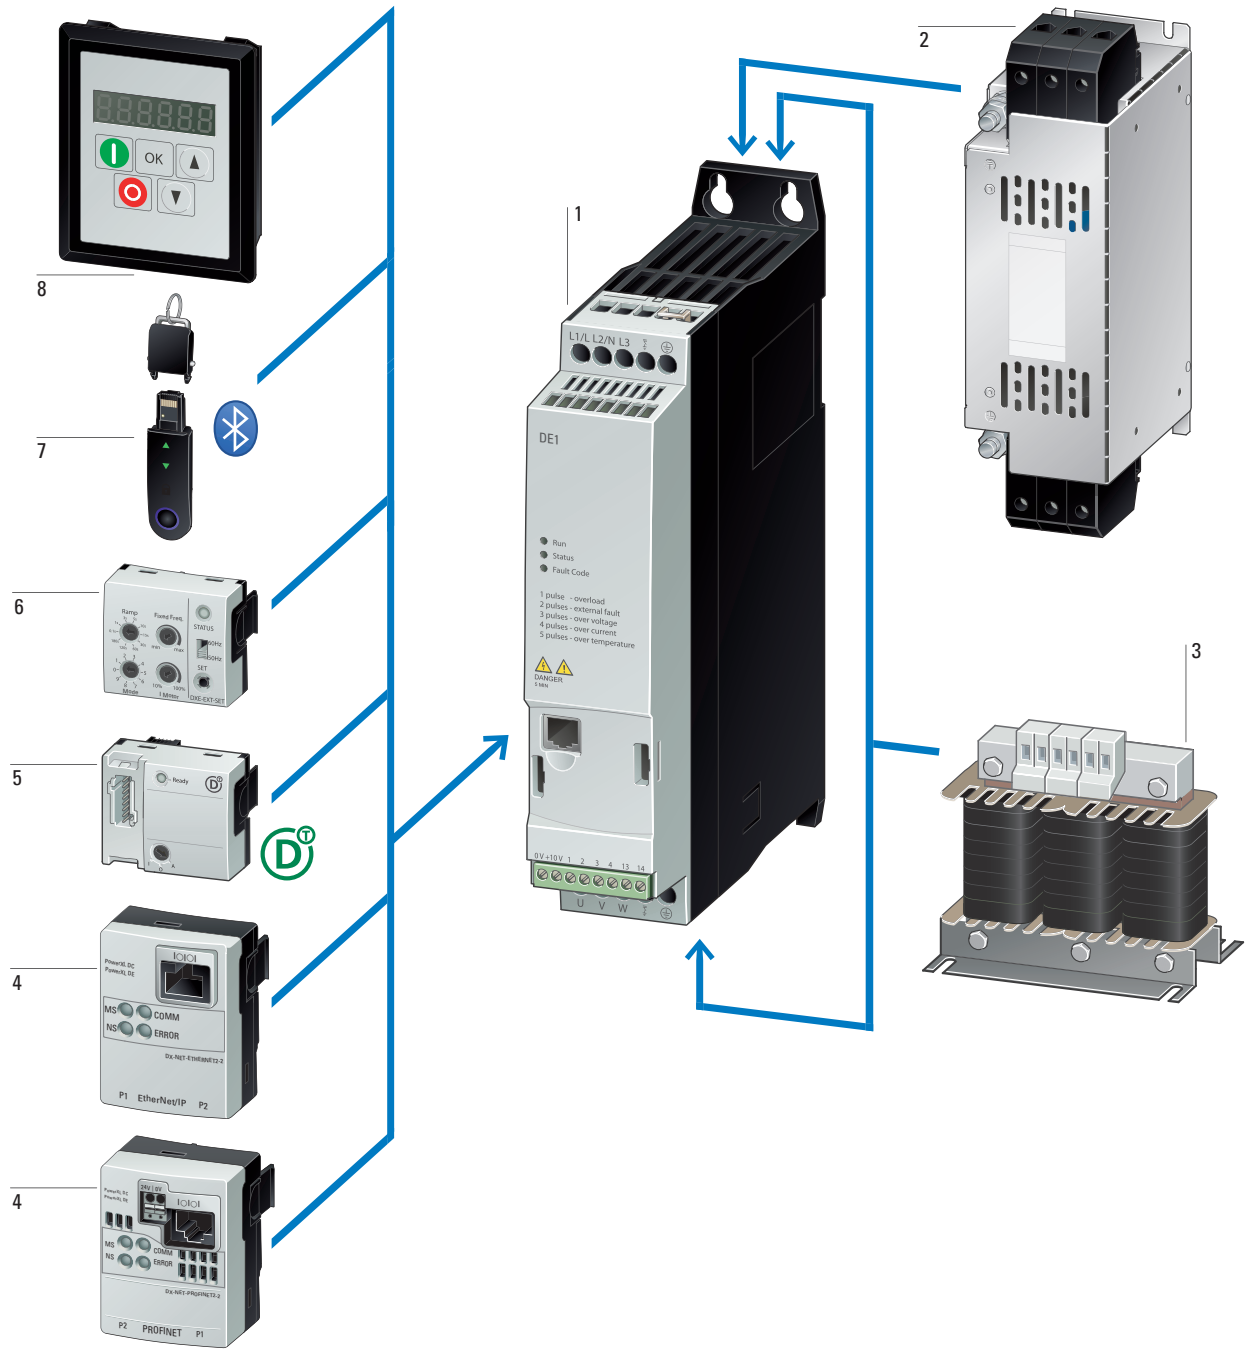

Variable speed starter DE1/DE11 1
→ Page 76

Radio interference suppression filter (EMC filter) 2
→ Page 256

Mains chokes, motor reactors 3
→ Page 254
→ Page 258

Communication modules 4
→ Page 78

SmartWire-DT module 5
→ Page 78


Configuration module 6
→ Page 78

Memory and Bluetooth stick 7
→ Page 78

External keypad 8
→ Page 78

Key to type references, sizes and degree of protection

Key to type references

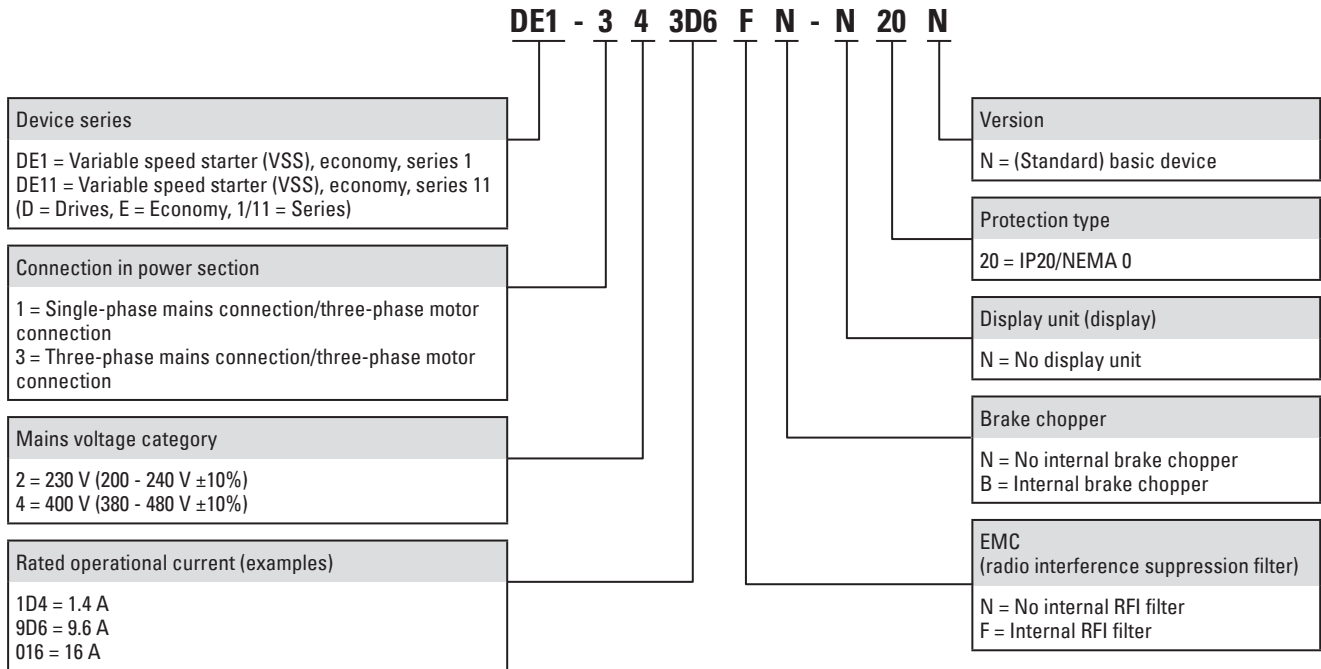


DE1

Sizes and degree of protection

Frame size

Protection type

IP20/NEMA 0




FS1

Frame size

Protection type

IP20/NEMA 0



FS2

2.1

DE1 variable speed starter up to 7.5 kW

DE1, for three-phase motors 230 V/400 V, IP20

Ordering

Rated operational current ¹⁾²⁾	Assigned motor output ²⁾³⁾⁴⁾		Radio interference suppression filter	Frame size	Protection type	Model code Catalog number	Std. pack
I _b A	P kW	P HP					
PowerXL DE1 variable speed starter							
U _b 230 V AC, single-phase / U ₂ 230 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 200 (-10%) - 240 (+10%) V							
1.4	0.25	0.33	– ✓	FS1	IP20/NEMA 0	DE1-121D4NN-N20N 177359 DE1-121D4FN-N20N 174327	1 unit
2.3	0.37	0.5	– ✓			DE1-122D3NN-N20N 177360 DE1-122D3FN-N20N 174328	
2.7	0.55		– ✓			DE1-122D7NN-N20N 177361 DE1-122D7FN-N20N 174329	
4.3	0.75	1	– ✓			DE1-124D3NN-N20N 177362 DE1-124D3FN-N20N 174330	
7	1.5	2	– ✓			DE1-127D0NN-N20N 177363 DE1-127D0FN-N20N 174331	
9.6	2.2	3	– ✓	FS2		DE1-129D6NN-N20N 177364 DE1-129D6FN-N20N 174332	
U _b 400 V AC, three-phase / U ₂ 400 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 380 (-10%) - 480 (+10%) V							
1.3	0.37	0.5	– ✓	FS1	IP20/NEMA 0	DE1-341D3NN-N20N 177365 DE1-341D3FN-N20N 174333	1 unit
2.1	0.75	1	– ✓			DE1-342D1NN-N20N 177366 DE1-342D1FN-N20N 174334	
3.6	1.5	2	– ✓			DE1-343D6NN-N20N 177367 DE1-343D6FN-N20N 174335	
5	2.2	3	– ✓	FS2		DE1-345D0NN-N20N 177368 DE1-345D0FN-N20N 174336	
6.6	3		– ✓			DE1-346D6NN-N20N 177369 DE1-346D6FN-N20N 174337	
8.5	4	5	– ✓			DE1-348D5NN-N20N 177370 DE1-348D5FN-N20N 174338	
11.3	5.5	7.5	– ✓			DE1-34011NN-N20N 177371 DE1-34011FN-N20N 174339	
16	7.5	10	– ✓			DE1-34016NN-N20N 177372 DE1-34016FN-N20N 174340	

Notes

¹⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +50 °C

²⁾ Overload cycle: 150% for 60 s every 600 s

³⁾ DE1-12...: at 230 V, 50 Hz/at 220 - 240 V, 60 Hz

DE1-34...: at 400 V, 50 Hz/at 440 - 480 V, 60 Hz

⁴⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

DE1 variable speed starter up to 75 kW

2.1

DE11, for three-phase motors 230 V/400 V, IP20

Rated operational current ¹⁾²⁾	Assigned motor output ²⁾³⁾⁴⁾		Radio interference suppression filter	Frame size	Protection type	Model code Catalog number	Std. pack
I _e A	P kW	P HP					
PowerXL DE11 variable speed starter							
U _e 230 V AC, single-phase / U _e 230 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 200 (-10%) - 240 (+10%) V							
1.4	0.25	0.33	– ✓	FS1	IP20/NEMA 0	DE11-121D4NN-N20N 180656 DE11-121D4FN-N20N 180650	1 unit
2.3	0.37	0.5	– ✓			DE11-122D3NN-N20N 180657 DE11-122D3FN-N20N 180651	
2.7	0.55		– ✓			DE11-122D7NN-N20N 180658 DE11-122D7FN-N20N 180652	
4.3	0.75	1	– ✓			DE11-124D3NN-N20N 180659 DE11-124D3FN-N20N 180653	
7	1.5	2	– ✓			DE11-127D0NN-N20N 180660 DE11-127D0FN-N20N 180654	
9.6	2.2	3	– ✓	FS2		DE11-129D6NN-N20N 180661 DE11-129D6FN-N20N 180655	
U _e 400 V AC, three-phase / U _e 400 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 380 (-10%) - 480 (+10%) V							
1.3	0.37	0.5	– ✓	FS1	IP20/NEMA 0	DE11-341D3NN-N20N 180670 DE11-341D3FN-N20N 180670	1 unit
2.1	0.75	1	– ✓			DE11-342D1NN-N20N 180671 DE11-342D1FN-N20N 180663	
3.6	1.5	2	– ✓			DE11-343D6NN-N20N 180672 DE11-343D6FN-N20N 180664	
5	2.2	3	– ✓	FS2		DE11-345D0NN-N20N 180673 DE11-345D0FN-N20N 180665	
6.6	3		– ✓			DE11-346D6NN-N20N 180674 DE11-346D6FN-N20N 180666	
8.5	4	5	– ✓			DE11-348D5NN-N20N 180675 DE11-348D5FN-N20N 180667	
11.3	5.5	7.5	– ✓			DE11-34011NN-N20N 180676 DE11-34011FN-N20N 180668	
16	7.5	10	– ✓			DE11-34016NN-N20N 180677 DE11-34016FN-N20N 180669	

Notes

¹⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +50 °C

²⁾ Overload cycle: 150% for 60 s every 600 s

³⁾ DE11-12... : at 230 V, 50 Hz/at 220 - 240 V, 60 Hz

DE11-34... : at 400 V, 50 Hz/at 440 - 480 V, 60 Hz











⁴⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

2.1


DE1 variable speed starter up to 7.5 kW

Accessories

DE1


	Description	Length m	For use with	Model code Catalog number	Std. pack
	External keypad With 7-digital display assembly Front IP54 With approx. 3 m-long, plug-in connection cable (RJ45, 8-pin)	3	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-KEY-LED2 186946	1 unit
	Configuration module Plug-in module (front) with selector switch for ramp time and operating mode With potentiometer for motor protection and fixed frequency	–	DE1, DE11	DXE-EXT-SET 174621	1 unit
Communication modules					
	PROFINET PROFINET plug-in module (front) with 2 x RJ45, 8 pole, PROFIdrive profile	–	DE1, DE11, DC1 (IP20)	DX-NET-PROFINET2-2 184947	1 unit
	Ethernet/IP Ethernet/IP plug-in module (front) with 2 x RJ45, 8 pole	–	DE1, DE11, DC1 (IP20)	DX-NET-ETHERNET2-2 184969	1 unit
	SmartWire-DT module Plug-in module (front) with slot for SWD4-8SF2-5 external device plug	–	DE1, DE11, DC1 (IP20)	DX-NET-SWD3 169131	1 unit
Parameter assignment					
	Parameter assignment Parameter storage unit and Bluetooth communication stick For storage, copying parameters, and/or transferring parameters to a PC or smartphone (iOS or Android) via Bluetooth with the drivesConnect software or the drivesConnect mobile app respectively With 2 function keys for uploading and downloading parameters with parameter memory.	–	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-COM-STICK3 197585	1 unit
Programming cable					
	Programming cable Interface converter USB/RS485 with connection cable, RJ45 8 pole For storage, copying parameters, and/or transferring parameters to a PC with the drivesConnect software, electrically isolated	3	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-CBL-PC-3M0 744-A3036-00P	1 unit
Connection cable					
	Connection cable Patch cord with RJ45 plugs, 8 pole	0.5 1 3	DE1, DE11, DC1, DB1, DA1	DX-CBL-RJ45-0M5 169137 DX-CBL-RJ45-1M0 169138 DX-CBL-RJ45-3M0 169139	1 unit
Bus terminating resistor					
	Bus terminating resistor RJ45 8 pole Connection to CANopen (pin 1/2, 124 Ω) or to Modbus RTU (pin 7/8, 120 Ω)	–	DX-SPL-RJ45-2SL-1PL	EASY-NT-R 256281	2 units
Splitter					
	Splitter RJ45, 8-pin, 3 sockets RJ45, 8-pin, 2 sockets/1 plug	–	DX-CBL-RJ45... DE1, DE11, DC1, DB1, DA1	DX-SPL-RJ45-3SL 169141 DX-SPL-RJ45-2SL1PL 169142	1 unit

Engineering

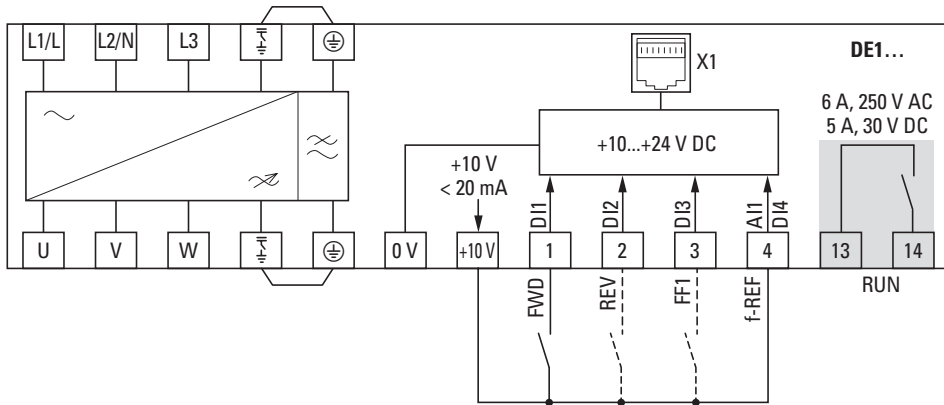


Mains

1 ~ 200 V - 240 V $\pm 10\%$, 50/60 Hz (DE1...-12...)

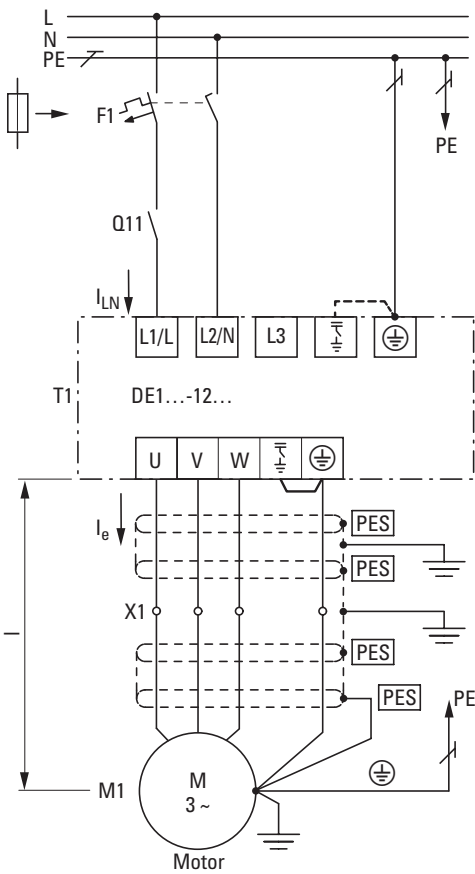

Mains

3 ~ 380 V - 480 V $\pm 10\%$, 50/60 Hz (DE1...-34...)

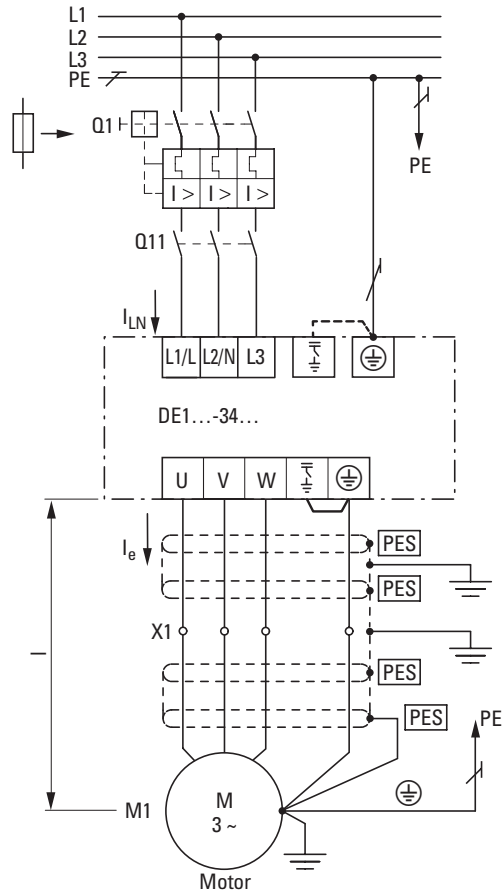

2.1

DE1 variable speed starter up to 7.5 kW

Assigned switching and protective elements for DE1

Model code	Power rating 150 % kW	Input current 150 % A	Output current 150 % A	MCCB Type 1 coordination at 150 %	Fuse Type 1 coordination at 150 %	RCD type at 150 %	Optional mains contactor at 150 %
230 V AC, single-phase/230 V AC, three-phase							
DE1-121D4...	0.25	3.6	1.4	FAZ-B10/1N	C10G10	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-122D3...	0.37	6.2	2.3	FAZ-B10/1N	C10G10	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-122D7...	0.55	7.3	2.7	FAZ-B10/1N	C10G10	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-124D3...	0.75	11.3	4.3	FAZ-B16/1N	C10G16	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-127D0...	1.5	17.4	7	FAZ-B20/1N	C10G20	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)
DE1-129D6...	2.2	23.2	9.6	FAZ-B32/1N	C22G40	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)
400 V AC, three-phase/400 V AC, three-phase							
DE1-341D3...	0.37	1.3	1.7	FAZ-B6/3	C10G8	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-342D1...	0.75	2.1	3.1	FAZ-B6/3	C10G8	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-343D6...	1.5	3.6	4.9	FAZ-B6/3	C10G8	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-345D0...	2.2	5	7	FAZ-B16/3	C10G16	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-346D6...	3	6.6	8.5	FAZ-B16/3	C10G16	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-348D5...	4	8.5	10	FAZ-B16/3	C10G16	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-34011...	5.5	11.3	12	FAZ-B16/3	C10G16	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DE1-34016...	7.5	16	16.5	FAZ-B25/3	C10G25	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)

DE1

DE1 variable speed starter up to 7.5 kW

2.1

Assigned switching and protective elements for DE1

External EMC filter at 150 %	External EMC filter (low leakage current) at 150 %	Mains choke at 150 %	u_k	Passive harmonic filter at 150 %	Motor choke at 150 %	Sine filter at 150 %	All-pole sine filter at 150 %
DX-EMC12-004	DX-EMC12-004-SL	DX-LN1-006	4 %	-	DX-LM3-008	not allowed	not allowed
DX-EMC12-008	DX-EMC12-008-SL	DX-LN1-009	4 %	-	DX-LM3-008	not allowed	not allowed
DX-EMC12-008	DX-EMC12-008-SL	DX-LN1-009	4 %	-	DX-LM3-008	not allowed	not allowed
DX-EMC12-012	DX-EMC12-012-SL	DX-LN1-013	4 %	-	DX-LM3-008	not allowed	not allowed
DX-EMC12-020	DX-EMC12-020-SL	DX-LN1-018	4 %	-	DX-LM3-008	not allowed	not allowed
DX-EMC12-025	DX-EMC12-025-SL	DX-LN1-024	4 %	-	DX-LM3-011	not allowed	not allowed
DX-EMC34-008	DX-EMC34-008-L	DX-LN3-004	4 %	DX-PHF34-010	DX-LM3-008	not allowed	not allowed
DX-EMC34-008	DX-EMC34-008-L	DX-LN3-004	4 %	DX-PHF34-010	DX-LM3-008	not allowed	not allowed
DX-EMC34-008	DX-EMC34-008-L	DX-LN3-006	4 %	DX-PHF34-010	DX-LM3-008	not allowed	not allowed
DX-EMC34-008	DX-EMC34-008-L	DX-LN3-010	4 %	DX-PHF34-010	DX-LM3-008	not allowed	not allowed
DX-EMC34-016	DX-EMC34-016-L	DX-LN3-010	4 %	DX-PHF34-010	DX-LM3-008	not allowed	not allowed
DX-EMC34-016	DX-EMC34-016-L	DX-LN3-010	4 %	DX-PHF34-010	DX-LM3-011	not allowed	not allowed
DX-EMC34-016	DX-EMC34-016-L	DX-LN3-016	4 %	DX-PHF34-019	DX-LM3-011	not allowed	not allowed
DX-EMC34-030	DX-EMC34-030-L	DX-LN3-024	4 %	DX-PHF34-019	DX-LM3-016	not allowed	not allowed

2.1

DE1 variable speed starter up to 75 kW

General rated operational data

Technical specifications

	Symbol	Unit	Value
General			
Standards			Specification for general requirements: IEC/EN 61800-2 EMC requirements: IEC/EN 61800-3 Safety requirements: IEC/EN 61800-5-1
Certifications and manufacturer's declarations on conformity			CE, UL, cUL, RCM
Production quality			RoHS, ISO 9001
Climatic proofing	pw	%	< 95%, average relative humidity (RH), non-condensing, non-corrosive, no dripping water (IEC/EN 61800-5-1)
Ambient temperature			
Operation			
IP20 (NEMA 0)	θ	°C	-10 up to +60 Exception: The following device types use derating: DE1...-34016NN-N20N, DE1...-34016FN-N20N.
Storage	θ	°C	-40 - +70
Impact resistance (EN 60068-2-27)			15 g/11 ms (under operating conditions) Mounted on DIN-rail Mounted on mounting plate with screws
Vibration as per IEC/EN 61800-5-1			Transportation as per IEC/EN 61800-2 DE1... transported as a single device in a separate package and UPS drop test (15 g/11 ms)
MTBF (mean time between failures)			DE1...-12... (FS1): > 73 years DE1...-12... (FS2): > 17 years DE1...-34... (FS1): > 88 years DE1...-34... (FS2): > 73 years
Electrostatic discharge (ESD, IEC 61800-3)	U	kV	±4, contact discharge / ±6, air discharge
Fast transient Burst (IEC 61800-3)			5 kHz for 5 min. / 100 kHz for 5 min.
Radio interference class (EN 61800-3)			
Maximum (screened) motor cable length with integrated radio interference suppression filter			
C1 (DE1...-12... only, for conducted emissions only)	l	m	5
C2	l	m	10
C3	l	m	25
Interference immunity (EN 61800-3)			
1st and 2nd environments			
Maximum motor cable length			
not screened	l	m	125
screened	l	m	65
Mounting position			
Any, not suspended (front not facing downwards), vertical only with DE1...-121D4..., DE1...-122D3..., DE1...-122D7...			
Altitude	h	m	0 - 1000 above sea level, > 1000 with 1% load current reduction (derating) for every 100 m, max. 2000
Protection type			
IP20 (NEMA 0)			
Protection against contact			
BGV A3 (VBG4, finger- and back-of-hand proof)			

DE1 variable speed starter up to 7.5 kW

2.1

Specific rated operational data

	Symbol	Unit	DE1...-121D4...	DE1...-122D3...	DE1...-122D7...	DE1...-124D3...	DE1...-127D0...	DE1...-129D6...
DE1...-12... (single-phase mains connection)								
Mains connection								
Rated operating voltage	U_e	V	230, single-phase	230, single-phase	230, single-phase	230, single-phase	230, single-phase	230, single-phase
Mains voltage	U_{LN}	V	200 - 240 ±10% (180 - 264)	200 - 240 ±10% (180 - 264)	200 - 240 ±10% (180 - 264)	200 - 240 ±10% (180 - 264)	200 - 240 ±10% (180 - 264)	200 - 240 ±10% (180 - 264)
Mains frequency	f	Hz	50/60 ±10%	50/60 ±10%	50/60 ±10%	50/60 ±10%	50/60 ±10%	50/60 ±10%
Input current (without mains choke)	I_{LN}	A	3.6	6.2	7.3	11.3	17.4	23.2
Power Part								
Rated operational current	I_e	A	1.4	2.3	2.7	4.3	7	9.6
Overload current, 1.5 x I_e , cyclically for 60 s every 600 s	I_{2-150}	A	2.1	3.45	4.05	6.45	10.5	14.4
Overload current, max. 2 x I_e every 600 s	I_{2max}	A	2.8	4.6	5.4	8.6	14	19.2
Output voltage at U_e	U_2	V	230, 3-phase	230, 3-phase	230, 3-phase	230, 3-phase	230, 3-phase	230, 3-phase
Output frequency	f_2	Hz	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)
Frequency resolution (setpoint value)	Δf	%	0.025	0.025	0.025	0.025	0.025	0.025
Pulse frequency (audible)	f_{PMM}	kHz	16 (4/8/12/16/24/32)	16 (4/8/12/16/24/32)	16 (4/8/12/16/24/32)	16 (4/8/12/16/24/32)	16 (4/8/12/16/24/32)	16 (4/8/12/16/24/32)
Derating between 50 °C and 60 °C			none	none	none	none	none	none
Contact current ¹⁾	I_{PE}	mA	< 3.5 AC/ < 10 DC	< 3.5 AC/ < 10 DC	< 3.5 AC/ < 10 DC	< 3.5 AC/ < 10 DC	< 3.5 AC/ < 10 DC	< 3.5 AC/ < 10 DC
DC-braking			0 - 100% U_e , 0 - 10 s, parameterizable					
Heat dissipation (idle, standby)	PV	W	3.44	3.44	3.44	3.44	3.44	4.66
Heat dissipation (speed/torque)								
100/100	P_V	W	16.4	18.3	25	30.9	78.4	91
90/100	P_V	W	16.4	18.3	25	30.9	78.4	91
90/50	P_V	W	12.6	10.4	15.1	15.3	51.6	55
50/100	P_V	W	13.5	16.8	19.8	28.9	68.9	72
50/50	P_V	W	11.6	7.9	12.3	14.7	44.9	46
50/25	P_V	W	10.9	5.6	10	10.3	37	38
0/100	P_V	W	13	–	25.3	31.8	62.4	–
0/50	P_V	W	10.5	10	10.9	15.2	44.6	–
0/25	P_V	W	–	–	–	–	–	30

Notes ¹⁾ Due to the design used for single-phase DE1...-12... devices, a higher leakage current will be produced if L1 and N are swapped.

2.1

DE1 variable speed starter up to 7.5 kW

Specific rated operational data

DE1

	Symbol	Unit	DE1...-121D4...	DE1...-122D3...	DE1...-122D7...	DE1...-124D3...	DE1...-127D0...	DE1...-129D6...
DE1...-12... (single-phase mains connection)								
Motor feeder								
Motor power, assigned								
at 230 V, 50 Hz	P	kW	0.25	0.37	0.55	0.75	1.5	2.2
at 220 -240 V, 60 Hz	P	HP	1/3	1/2	1/2	1	2	3
Apparent power at rated value								
at 230 V	S	kVA	0.56	0.92	1.08	1.71	2.79	3.82
at 240 V	S	kVA	0.58	0.96	1.12	1.79	2.91	3.99
Control section								
Relay								
Switching contact	S (RUN signal)							
Voltage, maximum	U	V	250 AC/30 DC	250 AC/30 DC	250 AC/30 DC	250 AC/30 DC	250 AC/30 DC	250 AC/30 DC
Load current, maximum	I	A	6 AC-1/5 DC-1	6 AC-1/5 DC-1	6 AC-1/5 DC-1	6 AC-1/5 DC-1	6 AC-1/5 DC-1	6 AC-1/5 DC-1
Reference voltage/Control voltage								
Output voltage	U _c	V	10	10	10	10	10	10
Max. permissible load current	I _c	mA	20	20	20	20	20	20
Analog input								
Resolution	12 bits							
Voltage	U _s	V	0 - 10	0 - 10	0 - 10	0 - 10	0 - 10	0 - 10
Current	I _s	mA	0/4 - 20	0/4 - 20	0/4 - 20	0/4 - 20	0/4 - 20	0/4 - 20
Digital input								
High signal voltage level	U _c	V	9 - 30	9 - 30	9 - 30	9 - 30	9 - 30	9 - 30
Input current	I _s	mA	1.15 (10 V)/ 3 (24 V)	1.15 (10 V)/ 3 (24 V)	1.15 (10 V)/ 3 (24 V)	1.15 (10 V)/ 3 (24 V)	1.15 (10 V)/ 3 (24 V)	1.15 (10 V)/ 3 (24 V)
Enclosure material								
Frame size			FS1	FS1	FS1	FS1	FS1	FS2
Dimensions (W x H x D)	mm		45 x 230 x 169	45 x 230 x 169	45 x 230 x 169	45 x 230 x 169	45 x 230 x 169	90 x 230 x 169
Maximum permissible deviation from vertical installation position	Degrees		5	5	5	90	90	90
Internal device fan			no	no	no	Yes	Yes	Yes
Protection type			IP20/NEMA 0	IP20/NEMA 0	IP20/NEMA 0	IP20/NEMA 0	IP20/NEMA 0	IP20/NEMA 0
Weight	m	kg	1.04	1.04	1.06	1.06	1.06	1.68
Terminal capacities, clampable								
Power Part								
Solid or stranded	A	mm ²	1 - 6	1 - 6	1 - 6	1 - 6	1 - 6	1 - 6
Flexible with ferrule	A	mm ²	1 - 6	1 - 6	1 - 6	1 - 6	1 - 6	1 - 6
Solid or stranded	A	AWG	18 - 6	18 - 6	18 - 6	18 - 6	18 - 6	18 - 6
Strip length	l	mm	8	8	8	8	8	8
Tool	PZ2 (Poizdrive) cross screwdriver							
Tightening torque	M	Nm	1.2	1.2	1.2	1.2	1.2	1.2
Control section								
Solid or stranded	A	mm ²	0.05 - 1.5	0.05 - 1.5	0.05 - 1.5	0.05 - 1.5	0.05 - 1.5	0.05 - 1.5
Flexible with ferrule	A	mm ²	0.5 - 1	0.5 - 1	0.5 - 1	0.5 - 1	0.5 - 1	0.5 - 1
Solid or stranded	A	AWG	30 - 16	30 - 16	30 - 16	30 - 16	30 - 16	30 - 16
Strip length	l	mm	5	5	5	5	5	5
Tool	0.7 x 3 mm standard screwdriver							
Tightening torque	M	Nm	0.5	0.5	0.5	0.5	0.5	0.5

	Symbol	Unit	DE1...-341D3...	DE1...-342D1...	DE1...-343D6...	DE1...-345D0...
DE1...-34... (three-phase mains connection)						
Mains connection						
Rated operating voltage	U_B	V	380/400/480, 3-phase	380/400/480, 3-phase	380/400/480, 3-phase	380/400/480, 3-phase
Mains voltage	U_{LN}	V	380 - 480 \pm 10% (342 - 528)	380 - 480 \pm 10% (342 - 528)	380 - 480 \pm 10% (342 - 528)	380 - 480 \pm 10% (342 - 528)
Mains frequency	f	Hz	50/60 \pm 10%	50/60 \pm 10%	50/60 \pm 10%	50/60 \pm 10%
Input current (without mains choke)	I_{LN}	A	1.7	3.1	4.9	7
Power Part						
Rated operational current	I_B	A	1.3	2.1	3.6	5
Overload current, 1.5 x I_B , cyclically for 60 s every 600 s	I_{2-150}	A	1.95	3.15	5.4	7.5
Overload current, max. 2 x I_B every 600 s	I_{2max}	A	2.6	4.2	7.2	10
Output voltage at U_B	U_2	V	380/400/480, 3-phase	380/400/480, 3-phase	380/400/480, 3-phase	380/400/480, 3-phase
Output frequency	f_2	Hz	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)
Frequency resolution (reference value)	Δf	%	0.025	0.025	0.025	0.025
Pulse frequency (audible)	f_{PWM}	kHz	16 (10/12/14/16/18/20)	16 (10/12/14/16/18/20)	16 (10/12/14/16/18/20)	16 (10/12/14/16/18/20)
Derating between 50 °C and 60 °C			none	<ul style="list-style-type: none"> • None if $f_{PWM} \leq 16$ kHz • None if $f_{PWM} \leq 20$ kHz, up to a max. of 57 °C • None if $I_B \leq 1.6$ A 	<ul style="list-style-type: none"> • None if $f_{PWM} \leq 16$ kHz • None if $I_B \leq 3.2$ A • None up to a max. of 57 °C 	none
Contact current	I_{PE}	mA	< 3.5 AC / < 10 DC	< 3.5 AC / < 10 DC	< 3.5 AC / < 10 DC	< 3.5 AC / < 10 DC
DC-braking			0 - 100% U_B , 0 - 10 s, parameterizable			
Heat dissipation (idle, standby)	P_V	W	5.13	5.13	5.13	5.52
Heat dissipation (speed/torque)						
100/100	P_V	W	16.7	26.8	44.9	57
90/100	P_V	W	16.7	26.8	44.9	57
90/50	P_V	W	14.2	16.7	30.4	39
50/100	P_V	W	20.7	27.9	44.7	50
50/50	P_V	W	11.4	17.2	28.4	37
50/25	P_V	W	9.9	14.3	24.9	30
0/100	P_V	W	–	–	41.6	–
0/50	P_V	W	–	–	22.3	36
0/25	P_V	W	–	–	–	29
Motor feeder						
Motor power, assigned						
at 400 V, 50 Hz	P	kW	0.37	0.75	1.5	2.2
at 440 - 480 V, 60 Hz	P	HP	1/2	1	2	3
Apparent power at rated value						
at 400 V	S	kVA	0.90	1.45	2.49	3.46
at 480 V	S	kVA	1.08	1.75	2.99	4.16
Control section						
Relay						
Switching contact			S (RUN signal)			
Voltage, maximum	U	V	250 AC/30 DC	250 AC/30 DC	250 AC/30 DC	250 AC/30 DC
Load current, maximum	I	A	6 AC-1/5 DC-1	6 AC-1/5 DC-1	6 AC-1/5 DC-1	6 AC-1/5 DC-1
Reference voltage/Control voltage						
Output voltage	U_c	V	10	10	10	10
Maximum permissible load current	I_c	mA	20	20	20	20
Analog input						
Resolution			12 bits	12 bits	12 bits	12 bits
Voltage	U_s	V	0 - 10	0 - 10	0 - 10	0 - 10
Current	I_s	mA	0/4 - 20	0/4 - 20	0/4 - 20	0/4 - 20
Digital Input						
High signal voltage level	U_c	V	9 - 30	9 - 30	9 - 30	9 - 30
Input current	I_c	mA	1.15 (10 V)/ 3 (24 V)	1.15 (10 V)/ 3 (24 V)	1.15 (10 V)/ 3 (24 V)	1.15 (10 V)/ 3 (24 V)

2.1

DE1 variable speed starter up to 7.5 kW

Specific rated operational data

	Symbol	Unit	DE1...-341D3...	DE1...-342D1...	DE1...-343D6...	DE1...-345D0...
DE1...-34... (three-phase mains connection)						
Enclosure material						
Frame size			FS1	FS1	FS1	FS2
Dimensions (W x H x D)		mm	45 x 230 x 169	45 x 230 x 169	45 x 230 x 169	90 x 230 x 169
Maximum permissible deviation from vertical installation position		Degrees	90	90	90	90
Internal device fan			Yes	Yes	Yes	Yes
Protection type			IP20/NEMA 0	IP20/NEMA 0	IP20/NEMA 0	IP20/NEMA 0
Weight	m	kg	1	1	1	1.6
Terminal capacities, clampable						
Power Part						
Solid or stranded	A	mm ²	1 - 6	1 - 6	1 - 6	1 - 6
Flexible with ferrule	A	mm ²	1 - 6	1 - 6	1 - 6	1 - 6
Solid or stranded	A	AWG	18 - 6	18 - 6	18 - 6	18 - 6
Strip length	l	mm	8	8	8	8
Tool			PZ2 (Pozidrive) cross screwdriver			
Tightening torque		Nm	1.2	1.2	1.2	1.2
Control section						
Solid or stranded	A	mm ²	0.05 - 1.5	0.05 - 1.5	0.05 - 1.5	0.05 - 1.5
Flexible with ferrule	A	mm ²	0.5 - 1	0.5 - 1	0.5 - 1	0.5 - 1
Solid or stranded	A	AWG	30 - 16	30 - 16	30 - 16	30 - 16
Strip length	l	mm	5	5	5	5
Tool			0.7 x 3 mm standard screwdriver			
Tightening torque	M	Nm	0.5	0.5	0.5	0.5

	Symbol	Unit	DE1...-346D6...	DE1...-348D5...	DE1...-34011...	DE1...-34016...
DE1...-34... (three-phase mains connection)						
Mains connection						
Rated operating voltage	U_B	V	380/400/480, 3-phase	380/400/480, 3-phase	380/400/480, 3-phase	380/400/480, 3-phase
Mains voltage	U_{LN}	V	380 - 480 \pm 10% (342 - 528)			
Mains frequency	f	Hz	50/60 \pm 10%	50/60 \pm 10%	50/60 \pm 10%	50/60 \pm 10%
Input current (without mains choke)	I_{LN}	A	8.5	10	12	16.5
Power part						
Rated current	I_B	A	6.6	8.5	11	16
Overload current, 1.5 x I_B , cyclically for 60 s every 600 s	I_{2-150}	A	9.9	12.75	16.5	24
Overload current, max. 2 x I_B every 600 s	I_{2max}	A	13.2	17	22	32
Output voltage at U_B	U_Z	V	380/480, 3-phase	380/480, 3-phase	380/480, 3-phase	380/480, 3-phase
Output frequency	f_Z	Hz	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)	0 - 50/60 (max. 300)
Frequency resolution (setpoint value)	Δf	%	0.025	0.025	0.025	0.025
Pulse frequency (audible)	f_{PWM}	kHz	16 (10/12/14/16/18/20)	16 (10/12/14/16/18/20)	16 (10/12/14/16/18/20)	16 (10/12/14/16/18/20)
Derating between 50 °C and 60 °C			none	none	<ul style="list-style-type: none"> • None if $f_{PWM} \leq 16$ kHz • None if $I_B \leq 10.6$ A and $f_{PWM} \leq 20$ kHz • None up to a max. of 57 °C 	<ul style="list-style-type: none"> • None if $f_{PWM} \leq 14$ kHz up to a max. of 50 °C • None if $f_{PWM} \leq 16$ kHz up to a max. of 46 °C • None if $I_B \leq 14.9$ A and $f_{PWM} \leq 10$ kHz • None if $I_B \leq 10.6$ A and $f_{PWM} \leq 20$ kHz
Contact current	I_{PE}	mA	< 3.5 AC/< 10 DC	< 3.5 AC/< 10 DC	< 3.5 AC/< 10 DC	< 3.5 AC/< 10 DC
DC-braking			0 - 100% U_B , 0 - 10 s, parameterizable			
Heat dissipation (idle, standby) P _v		W	5.52	5.52	5.52	5.52
Heat dissipation (speed/torque)						
100/100	P_v	W	76	101	132	216
90/100	P_v	W	76	101	132	216
90/50	P_v	W	55	65	88	126
50/100	P_v	W	69	93	121	198
50/50	P_v	W	51	60	85	121
50/25	P_v	W	48	51	64	86
0/100	P_v	W	–	76	–	–
0/50	P_v	W	–	55	72	–
0/25	P_v	W	–	47	58	78
Motor feeder						
Motor power assigned						
at 400 V, 50 Hz	P	kW	3	4	5.5	7.5
at 440 - 480 V, 60 Hz	P	HP	3	5	7.5	10
Apparent power at rated value						
at 400 V	S	kVA	4.57	5.89	7.62	11.09
at 480 V	S	kVA	5.49	7.07	9.15	13.30
Control section						
Relay						
Switching contact			S (RUN signal)			
Voltage, maximum	U	V	250 AC/30 DC	250 AC/30 DC	250 AC/30 DC	250 AC/30 DC
Load current, maximum	I	A	6 AC-1/5 DC-1	6 AC-1/5 DC-1	6 AC-1/5 DC-1	6 AC-1/5 DC-1
Reference voltage/Control voltage						
Output voltage	U_c	V	10	10	10	10
Maximum permissible load current	I_c	mA	20	20	20	20
Analog input						
Resolution			12 bits	12 bits	12 bits	12 bits
Voltage	U_s	V	0 - 10	0 - 10	0 - 10	0 - 10
Current	I_s	mA	0/4 - 20	0/4 - 20	0/4 - 20	0/4 - 20
Digital Input						
High signal voltage level	U_c	V	9 - 30	9 - 30	9 - 30	9 - 30
Input current	I_c	mA	1.15 (10 V)/3 (24 V)	1.15 (10 V)/3 (24 V)	1.15 (10 V)/3 (24 V)	1.15 (10 V)/3 (24 V)

2.1


DE1 variable speed starter up to 7.5 kW

Specific rated operational data

	Symbol	Unit	DE1...-346D6...	DE1...-348D5...	DE1...-34011...	DE1...-34016...
DE1...-34... (three-phase mains connection)						
Enclosure material						
Frame size			FS2	FS2	FS2	FS2
Dimensions (W x H x D)		mm	90 x 230 x 169	90 x 230 x 169	90 x 230 x 169	90 x 230 x 169
Maximum permissible deviation from vertical installation position		Degrees	90	90	90	90
Internal device fan			Yes	Yes	Yes	Yes
Protection type			IP20/NEMA 0	IP20/NEMA 0	IP20/NEMA 0	IP20/NEMA 0
Weight	m	kg	1.6	1.6	1.6	1.6
Terminal capacities, clampable						
Power Part						
Solid or stranded	A	mm ²	1 - 6	1 - 6	1 - 6	1 - 6
Flexible with ferrule	A	mm ²	1 - 6	1 - 6	1 - 6	1 - 6
Solid or stranded	A	AWG	18 - 6	18 - 6	18 - 6	18 - 6
Strip length	l	mm	8	8	8	8
Tool			PZ2 (Pozidrive) cross screwdriver			
Tightening torque		Nm	1.2	1.2	1.2	1.2
Control section						
Solid or stranded	A	mm ²	0.05 - 1.5	0.05 - 1.5	0.05 - 1.5	0.05 - 1.5
Flexible with ferrule	A	mm ²	0.5 - 1	0.5 - 1	0.5 - 1	0.5 - 1
Solid or stranded	A	AWG	30 - 16	30 - 16	30 - 16	30 - 16
Strip length	l	mm	5	5	5	5
Tool			0.7 x 3 mm standard screwdriver			
Tightening torque	M	Nm	0.5	0.5	0.5	0.5


Dimensions and weights

Frame size FS1

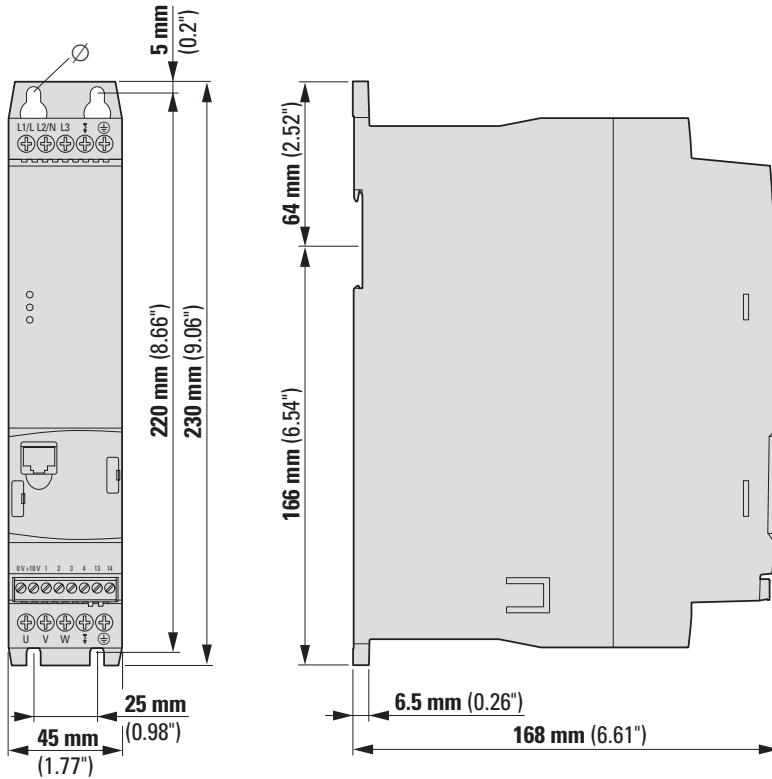

DE1

Frame size FS2

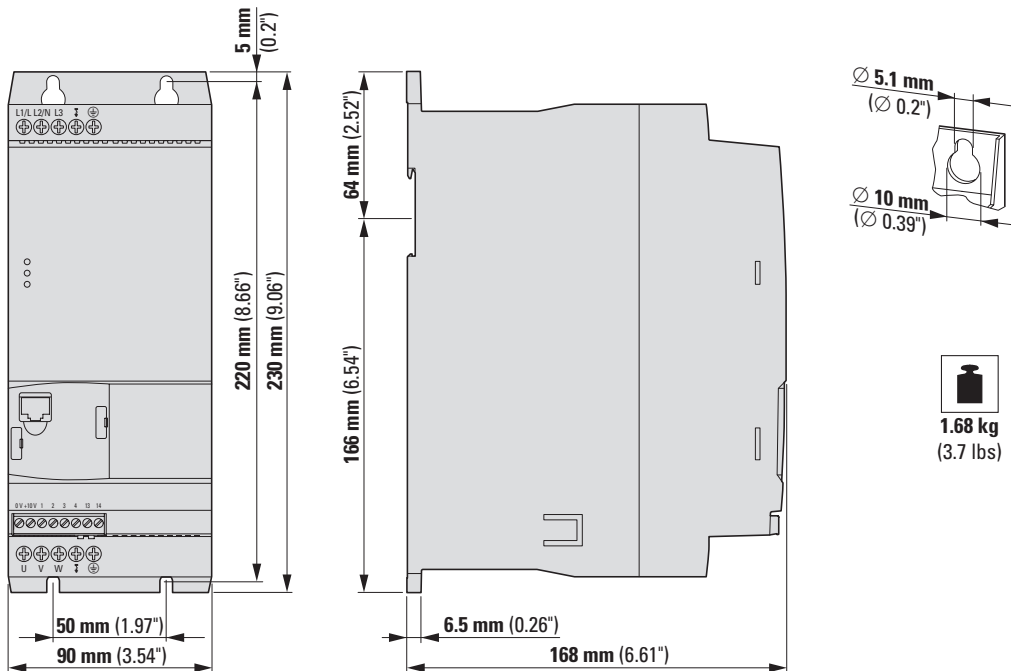



PowerXL DC1 variable frequency drives

Compact Machinery Drive

The compact PowerXL DC1 variable frequency drive is particularly well-suited for use with simple pump, fan,

and conveyor belt systems. It can be quickly and easily configured and commissioned, resulting in tangible savings.

Performance range:

- 0.37 - 0.55 kW (U_e : 1~ 115 V, U_2 : 1~ 115 V)
- 0.37 - 1.1 kW (U_e : 1~ 115 V, U_2 : 3~ 230 V)
- 0.37 - 1.1 kW (U_e : 1~ 230 V, U_2 : 1~ 230 V)
- 0.37 - 4 kW (U_e : 1~ 230 V, U_2 : 3~ 230 V)
- 0.37 - 11 kW (U_e : 3~ 230 V, U_2 : 3~ 230 V)
- 0.75 - 22 kW (U_e : 3~ 400 V, U_2 : 3~ 400 V)

Accessory:

- Plug-in communication modules: SmartWire-DT, Ethernet/IP, PROFINET (PROFIdrive)
- External LED keypad
- Mains chokes
- Motor chokes
- External EMC filter
- I/O expansions
- External keypad
- Sine filter
- Braking resistances
- Parameter storage unit and Bluetooth communication stick
- drivesConnect parameter configuration software
- drivesConnect mobile App (iOS, Android)

Features:

- Fast commissioning with 14 basic parameters
- Large overload capability: 150% for 60 seconds, 175% for 2 seconds
- Ambient air temperature up to 50 °C without derating
- Sensorless vector control for all motor types: IE2-, IE3-, IE4-, IE5-motors, Induction motors, Permanent magnet motors, Synchronous reluctance motors, Brushless DC motors
- Short-circuit proof in all operating modes
- Integrated CANopen and Modbus RTU
- Degrees of protection IP20 and IP66
- Integrated EMC filter
- Integrated Brake Transistor
- Integrated PI controller
- U/f control
- Voltage boost
- DC braking
- Detachable control signal terminal strip
- International standards (CE, UL, cUL, RCM, RoHS, EAC, UkrSEPRO)

Applications:

- Fans, pumps
- Machines
- Coating systems
- Conveyor belts
- Filling machines
- Distributed applications (IP66)
- 1~ AC motors

For more information, visit:
[Eaton.com/dc1](https://www.eaton.com/dc1)



2.2 DC1 variable frequency drives


System overview	92
Key to type references	93
Sizes and degree of protection	94
Ordering	95
DC1, for AC motors 115 V/230 V, IP20	95
DC1, for three-phase motors 230 V, IP20	96
DC1, for three-phase motors 400 V, IP20	98
DC1, for AC motors 115 V/230 V, IP66	99
DC1, for three-phase motors 230 V, IP66	100
DC1, for three-phase motors 400 V, IP66	102
Accessories	103
Engineering	105
Connection examples	105
Assigned switching and protective elements for DC1	110
Technical specifications	112
General rated operational data	112
Specific rated operational data	115
Dimensions and weights	121

2.2

DC1 variable frequency drives

System overview

System overview

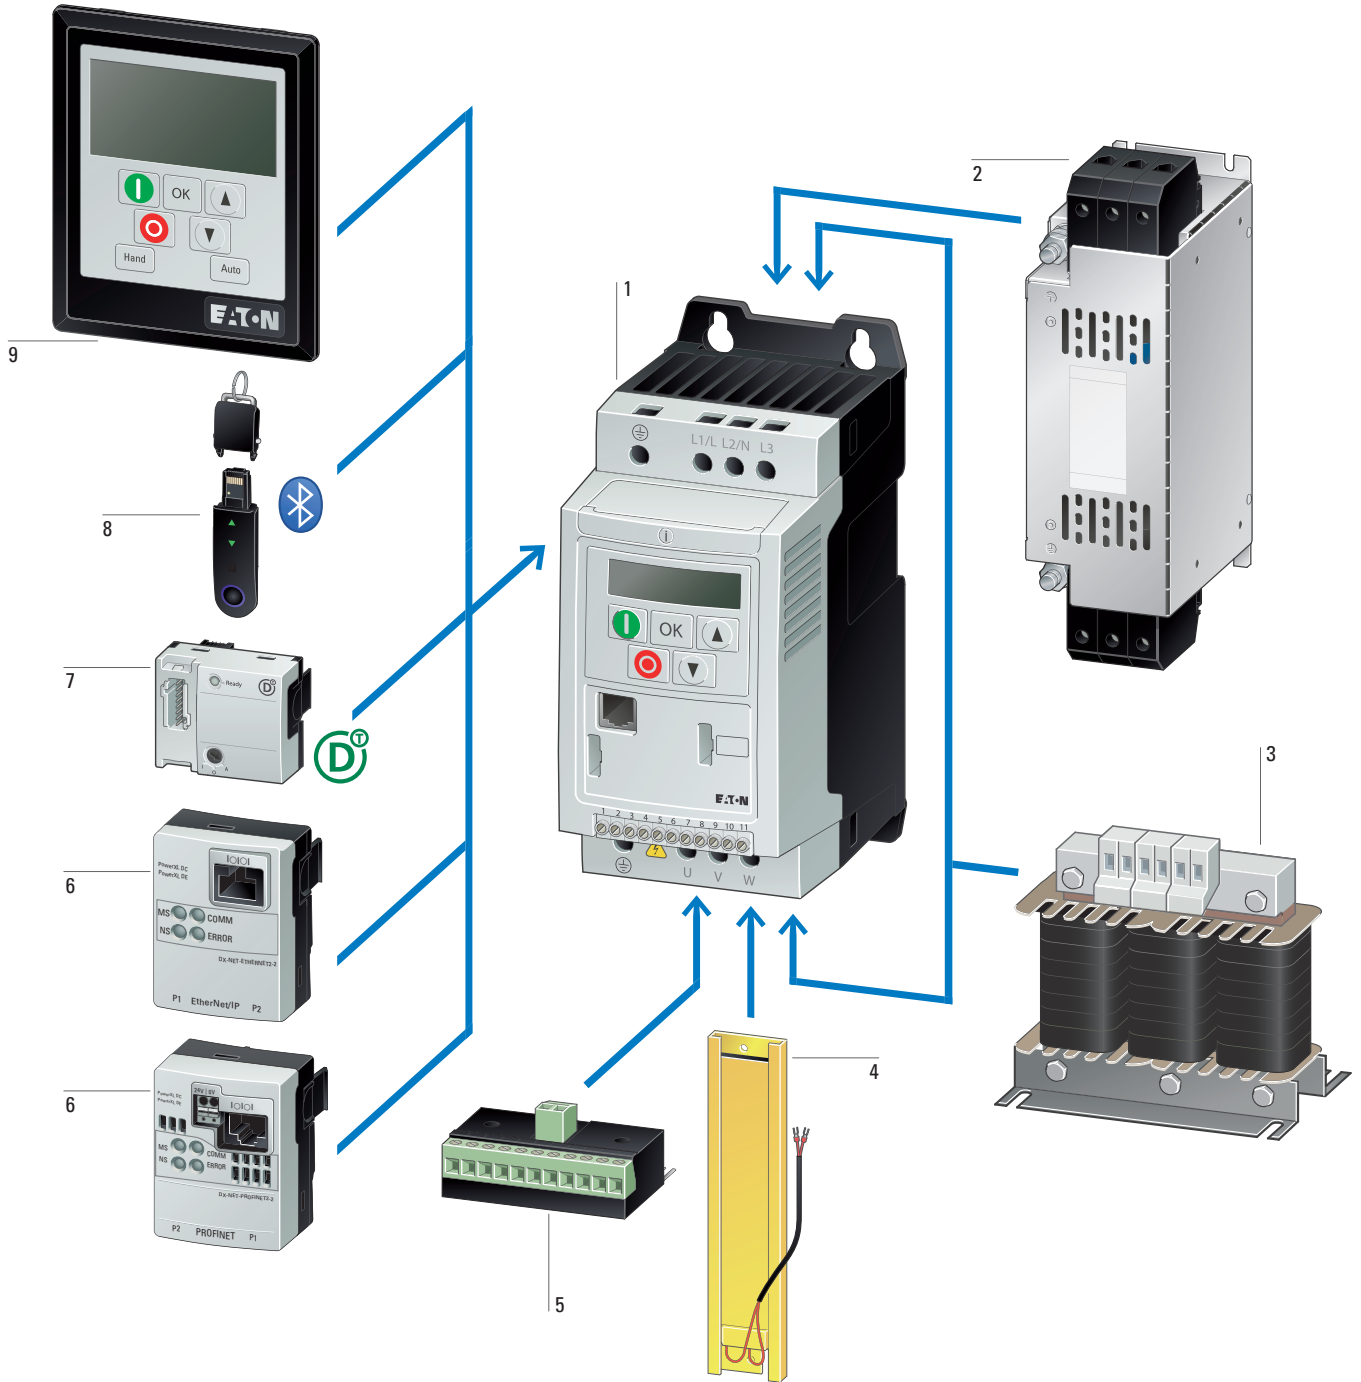

DC1

DC1 variable frequency drive 1
→ Page 95

External radio interference suppression filter (EMC filter) 2
→ Page 256

Mains choke, motor choke, sine filter 3
→ Page 254
→ Page 258
→ Page 259

Braking resistance 4
→ Page 261

Expansion modules 5
→ Page 103


Communication modules 6
→ Page 103

SmartWire-DT module 7
→ Page 103

Memory and Bluetooth stick 8
→ Page 103

External keypad 9
→ Page 103

Key to type references

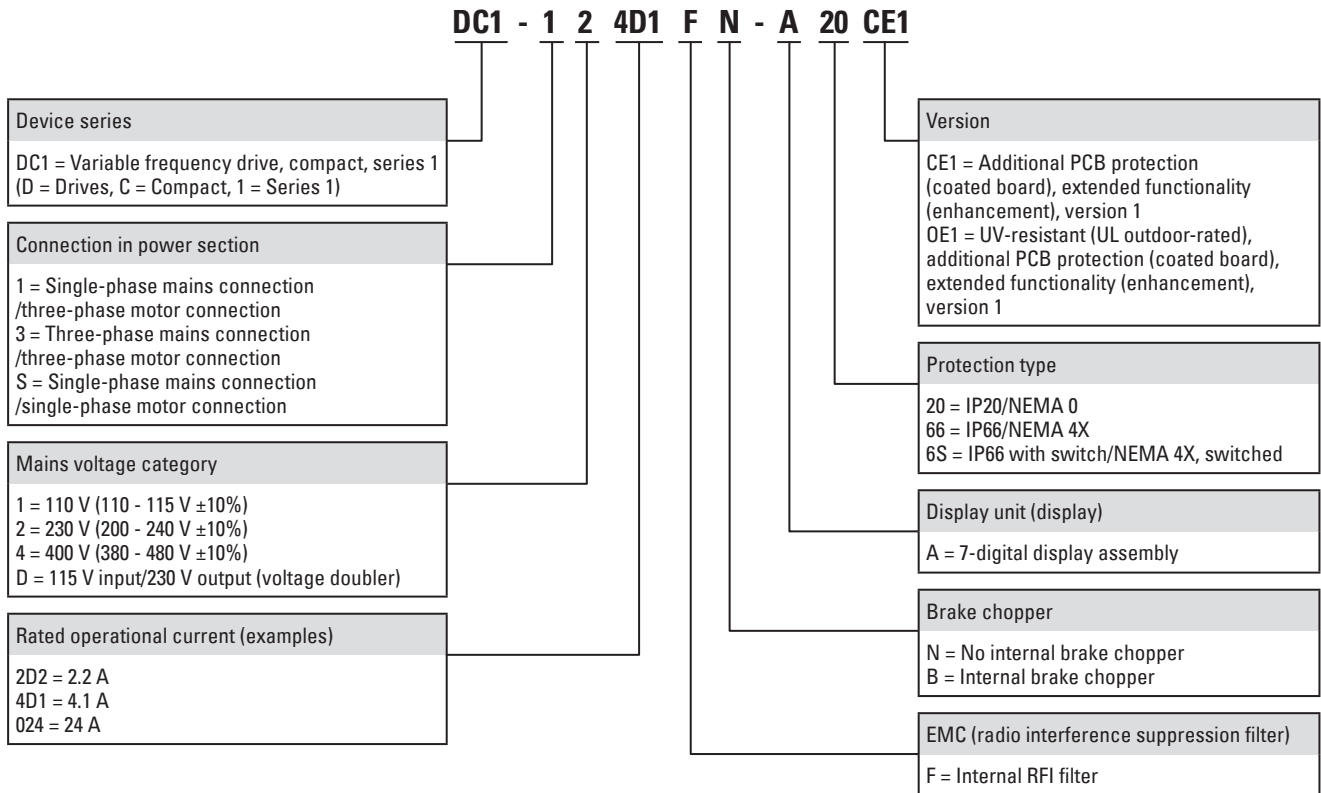













DC1

2.2

DC1 variable frequency drives

Sizes and degree of protection

Sizes and degree of protection

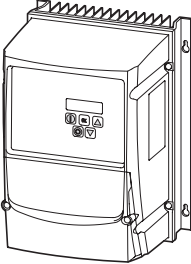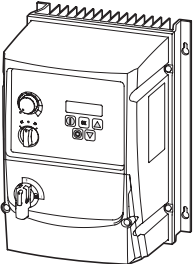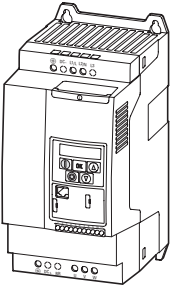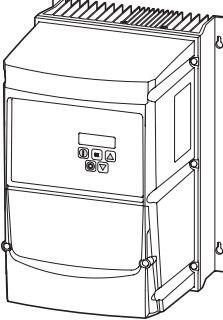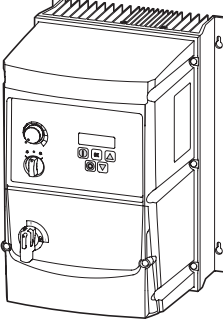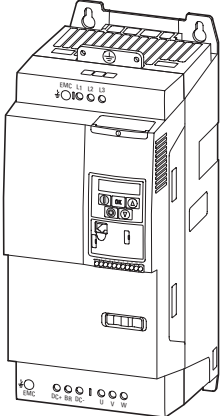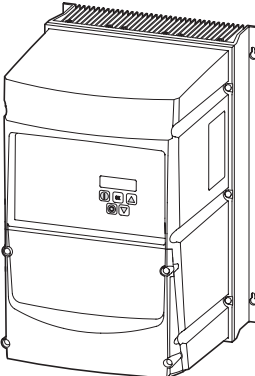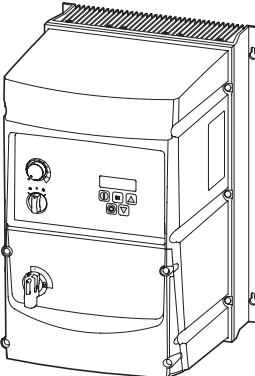Frame size	Protection type IP20/NEMA 0	IP66/NEMA 4X	IP66/NEMA 4X Local controls
FS1			
FS2			
FS3			
FS4			

DC1

Ordering

Rated operational current ¹⁾⁴⁾ I _e A	Assigned motor output ¹⁾²⁾³⁾ P kW P HP		Configuration			Frame size	Protection type	Model code Catalog number	Std. pack
	Radio interference suppression filter	Brake chopper	7-segment display						
PowerXL DC1 variable frequency drives									
U ₁ 115 V AC, single-phase / U ₂ 115 V AC, single-phase Mains voltage (50/60Hz) U _{LN} 110 (-10%) - 115 (+10%) V									
7	0.37	0.5	-	-	✓	FS1	IP20/NEMA 0	DC1-S17D0NN-A20CE1 186073	1 unit
10.5	0.55	0.75	-	✓	✓	FS2		DC1-S1011NB-A20CE1 186076	
U ₁ 230 V AC, single-phase / U ₂ 230 V AC, single-phase Mains voltage (50/60Hz) U _{LN} 200 (-10%) - 240 (+10%) V									
4.3	0.37	0.5	-	-	✓	FS1	IP20/NEMA 0	DC1-S24D3NN-A20CE1 186079	1 unit
			✓	-	✓			DC1-S24D3FN-A20CE1 186088	
7	0.75	1	-	-	✓			DC1-S27D0NN-A20CE1 186082	
			✓	-	✓			DC1-S27D0FN-A20CE1 186091	
10.5	1.1	1.5	-	✓	✓	FS2		DC1-S2011NB-A20CE1 186085	
			✓	✓	✓			DC1-S2011FB-A20CE1 186094	

Notes

- ¹⁾ Overload cycle: 150% for 60 s every 600 s
- ²⁾ DC1-S1... : at 115 V, 50 Hz/at 110 - 120 V, 60 Hz
DC1-S2... : at 230 V, 50 Hz/at 220 - 240 V, 60 Hz
- ³⁾ For AC motors with internal and external ventilation with 50/60 Hz without additional start capacitor
- ⁴⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +50 °C

2.2

DC1 variable frequency drives

DC1, for three-phase motors 230 V, IP20

Rated operational current ¹⁾⁴⁾ I_b A	Assigned motor output ¹⁾²⁾³⁾		Configuration			Frame size	Protection type	Model code Catalog number	Std. pack
	P kW	P HP	Radio interference suppression filter	Brake chopper	7-segment display				
PowerXL DC1 variable frequency drives									
The mains voltage of 115 V is raised to 230 V (output voltage) through an internal voltage double connection. U_s 115 V AC, single-phase / U_o 230 V AC, three-phase Mains voltage (50/60Hz) U_{LN} 110 (-10%) - 115 (+10%) V									
2.3	0.37	0.5	-	-	✓	FS1	IP20/NEMA 0	DC1-1D2D3NN-A20CE1 185765	1 unit
4.3	0.75	1	-	-	✓			DC1-1D4D3NN-A20CE1 185768	
5.8	1.1	1.5	-	✓	✓	FS2		DC1-1D5D8NB-A20CE1 185771	
U_s 230 V AC, single-phase / U_o 230 V AC, three-phase Mains voltage (50/60Hz) U_{LN} 200 (-10%) - 240 (+10%) V									
2.3	0.37	0.5	-	-	✓	FS1	IP20/NEMA 0	DC1-122D3NN-A20CE1 185785	1 unit
			✓	-	✓			DC1-122D3FN-A20CE1 185803	
4.3	0.75	1	-	-	✓			DC1-124D3NN-A20CE1 185788	
			✓	-	✓			DC1-124D3FN-A20CE1 185806	
7	1.5	2	-	-	✓			DC1-127D0NN-A20CE1 185791	
			✓	-	✓			DC1-127D0FN-A20CE1 185809	
			-	✓	✓	FS2		DC1-127D0NB-A20CE1 185794	
			✓	✓	✓			DC1-127D0FB-A20CE1 185812	
10.5	2.2	3	-	✓	✓			DC1-12011NB-A20CE1 185797	
			✓	✓	✓			DC1-12011FB-A20CE1 185815	
15.3 ⁵⁾	4	5	-	✓	✓	FS3		DC1-12015NB-A20CE1 185800	

Notes

¹⁾ Overload cycle: 150% for 60 s every 600 s

²⁾ At 230 V, 50 Hz/at 220 - 240 V, 60 Hz

³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

⁴⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +50 °C

⁵⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +50 °C

Rated operational current ¹⁾⁴⁾ I _e A	Assigned motor output ¹⁾²⁾³⁾ P kW P HP		Configuration			Frame size	Protection type	Model code Catalog number	Std. pack
	Radio interference suppression filter	Brake chopper	7-segment display						
PowerXL DC1 variable frequency drives									
U ₂ 230 V AC, three-phase / U ₂ 230 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 200 (-10%) - 240 (+10%) V									
2.3	0.37	0.5	-	-	✓	FS1	IP20/NEMA 0	DC1-322D3NN-A20CE1 185818	1 unit
4.3	0.75	1	-	-	✓			DC1-324D3NN-A20CE1 185821	
7	1.5	2	-	-	✓			DC1-327D0NN-A20CE1 185824	
			-	✓	✓	FS2		DC1-327D0NB-A20CE1 185827	
			✓	✓	✓			DC1-327D0FB-A20CE1 185836	
10.5	2.2	3	-	✓	✓			DC1-32011NB-A20CE1 185830	
			✓	✓	✓			DC1-32011FB-A20CE1 185839	
18 ⁵⁾	4	5	-	✓	✓	FS3		DC1-32018NB-A20CE1 185833	
			✓	✓	✓			DC1-32018FB-A20CE1 185842	
24	5.5	7.5	-	✓	✓			DC1-32024NB-A20CE1 185777	
			✓	✓	✓			DC1-32024FB-A20CE1 185774	
30	7.5	10	-	✓	✓	FS4		DC1-32030NB-A20CE1 185778	
			✓	✓	✓			DC1-32030FB-A20CE1 185775	
46	11	15	-	✓	✓			DC1-32046NB-A20CE1 185779	
			✓	✓	✓			DC1-32046FB-A20CE1 185776	

Notes

- ¹⁾ Overload cycle: 150% for 60 s every 600 s
- ²⁾ At 230 V, 50 Hz/at 220 - 240 V, 60 Hz
- ³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ⁴⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +50 °C
- ⁵⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +50 °C



2.2

DC1 variable frequency drives

DC1, for three-phase motors 400 V, IP20

Rated operational current ¹⁾⁴⁾ I _e A	Assigned motor output ¹⁾²⁾³⁾ P kW P HP		Configuration			Frame size	Protection type	Model code Catalog number	Std. pack
	Radio interference suppression filter	Brake chopper	7-segment display						
PowerXL DC1 variable frequency drives									
U _e 400 V AC, three-phase / U ₂ 400 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 380 (-10%) - 480 (+10%) V									
2.2	0.75	1	-	-	✓	FS1	IP20/NEMA 0	DC1-342D2NN-A20CE1 185721	1 unit
			✓	-	✓			DC1-342D2FN-A20CE1 185743	
4.1	1.5	2	-	-	✓			DC1-344D1NN-A20CE1 185724	
			✓	-	✓			DC1-344D1FN-A20CE1 185746	
			-	✓	✓	FS2		DC1-344D1NB-A20CE1 185727	
			✓	✓	✓			DC1-344D1FB-A20CE1 185749	
5.8	2.2	3	-	✓	✓			DC1-345D8NB-A20CE1 185730	
			✓	✓	✓			DC1-345D8FB-A20CE1 185752	
9.5	4	5	-	✓	✓			DC1-349D5NB-A20CE1 185733	
			✓	✓	✓			DC1-349D5FB-A20CE1 185755	
14	5.5	10	-	✓	✓	FS3		DC1-34014NB-A20CE1 185736	
			✓	✓	✓			DC1-34014FB-A20CE1 185758	
18	7.5		-	✓	✓			DC1-34018NB-A20CE1 185739	
			✓	✓	✓			DC1-34018FB-A20CE1 185761	
24 ⁵⁾	11	15	-	✓	✓			DC1-34024NB-A20CE1 185742	
			✓	✓	✓			DC1-34024FB-A20CE1 185764	
30	15	20	-	✓	✓	FS4		DC1-34030NB-A20CE1 185783	
			✓	✓	✓			DC1-34030FB-A20CE1 185780	
39	18.5	25	-	✓	✓			DC1-34039NB-A20CE1 185784	
			✓	✓	✓			DC1-34039FB-A20CE1 185781	
46	22	30	-	✓	✓			DC1-34046NB-A20CE1 185844	
			✓	✓	✓			DC1-34046FB-A20CE1 185782	

Notes

¹⁾ Overload cycle: 150% for 60 s every 600 s

²⁾ DC1-34... : at 400 V, 50 Hz/at 440 - 480 V, 60 Hz

³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

⁴⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +50 °C

⁵⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +50 °C

Rated operational current ¹⁾⁴⁾ I_e	Assigned motor output ¹⁾²⁾³⁾		Configuration				Frame size	Protection type	Model code Catalog number	Std. pack
	P	P	Radio interference suppression filter	Brake chopper	7-segment display	Local controls				
A	kW	HP								
PowerXL DC1 variable frequency drives										
U _e 230 V AC, single-phase / U ₂ 230 V AC, single-phase Mains voltage (50/60Hz) U _{LN} 200 (-10%) - 240 (+10%) V										
4.3	0.37	0.5	✓	-	✓	-	FS1	IP66/NEMA 4X	DC1-S24D3FN-A660E1 199387	1 unit
			✓	-	✓	✓			DC1-S24D3FN-A6S0E1 199388	
7	0.75	1	✓	-	✓	-			DC1-S27D0FN-A660E1 199389	
			✓	-	✓	✓			DC1-S27D0FN-A6S0E1 199390	
10.5	1.1	1.5	✓	✓	✓	-	FS2		DC1-S2011FB-A660E1 199391	
			✓	✓	✓	✓			DC1-S2011FB-A6S0E1 199392	

Notes

- ¹⁾ Overload cycle: 150% for 60 s every 600 s
- ²⁾ DC1-S2... : at 230 V, 50 Hz/at 220 - 240 V, 60 Hz
- ³⁾ For AC motors with internal and external ventilation with 50/60 Hz without additional start capacitor
- ⁴⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +40 °C



2.2

DC1 variable frequency drives

DC1, for three-phase motors 230 V, IP66

Rated operational current ¹⁾⁴⁾ I_e	Assigned motor output ¹⁾²⁾³⁾		Configuration				Frame size	Protection type	Model code Catalog number	Std. pack
	P	P	Radio interference suppression filter	Brake chopper	7-segment display	Local controls				
A	kW	HP								
PowerXL DC1 variable frequency drives										
U_e 115 V AC, single-phase / U_2 230 V AC, three-phase The mains voltage of 115 V is raised to 230 V (output voltage) through an internal voltage double connection. Mains voltage (50/60Hz) U_{LN} 110 (-10%) - 115 (+10%) V										
2.3	0.37	0.5	-	-	✓	-	FS1	IP66/NEMA 4X	DC1-1D2D3NN-A660E1 199393	1 unit
			-	-	✓	✓			DC1-1D2D3NN-A6S0E1 199394	
4.3	0.75	1	-	-	✓	-			DC1-1D4D3NN-A660E1 199395	
			-	-	✓	✓			DC1-1D4D3NN-A6S0E1 199396	
5.8	1.1	1.5	-	✓	✓	-	FS2		DC1-1D5D8NB-A660E1 199397	
			-	✓	✓	✓			DC1-1D5D8NB-A6S0E1 199398	
U_e 230 V AC, single-phase / U_2 230 V AC, three-phase Mains voltage (50/60Hz) U_{LN} 200 (-10%) - 240 (+10%) V										
2.3	0.37	0.5	✓	-	✓	-	FS1	IP66/NEMA 4X	DC1-122D3FN-A660E1 199399	1 unit
			✓	-	✓	✓			DC1-122D3FN-A6S0E1 199400	
4.3	0.75	1	✓	-	✓	-			DC1-124D3FN-A660E1 199401	
			✓	-	✓	✓			DC1-124D3FN-A6S0E1 199402	
7	1.5	2	✓	-	✓	-			DC1-127D0FN-A660E1 199403	
			✓	-	✓	✓			DC1-127D0FN-A6S0E1 199404	
			✓	✓	✓	-	FS2		DC1-127D0FB-A660E1 199405	
			✓	✓	✓	✓			DC1-127D0FB-A6S0E1 199406	
10.5	2.2	3	✓	✓	✓	-			DC1-12011FB-A660E1 199407	
			✓	✓	✓	✓			DC1-12011FB-A6S0E1 199408	
15.3 ⁵⁾	4	5	✓	✓	✓	-	FS3		DC1-12015FB-A660E1 199409	
			✓	✓	✓	✓			DC1-12015FB-A6S0E1 199410	

Notes

- ¹⁾ Overload cycle: 150% for 60 s every 600 s
- ²⁾ At 230 V, 50 Hz/at 220 - 240 V, 60 Hz
- ³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ⁴⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +40 °C
- ⁵⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C

Rated operational current ¹⁾⁴⁾ <i>I_e</i>	Assigned motor output ¹⁾²⁾³⁾		Configuration				Frame size	Protection type	Model code Catalog number	Std. pack
	P	P	Radio interference suppression filter	Brake chopper	7-segment display	Local controls				
A	kW	HP								
PowerXL DC1 variable frequency drives										
U _e 230 V AC, three-phase / U _e 230 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 200 (-10%) - 240 (+10%) V										
2.3	0.37	0.5	✓	-	✓	-	FS1	IP66/NEMA 4X	DC1-322D3FN-A660E1 199411	1 unit
			✓	-	✓	✓			DC1-322D3FN-A6S0E1 199412	
4.3	0.75	1	✓	-	✓	-			DC1-324D3FN-A660E1 199413	
			✓	-	✓	✓			DC1-324D3FN-A6S0E1 199414	
7	1.5	2	✓	-	✓	-			DC1-327D0FN-A660E1 199415	
			✓	-	✓	✓			DC1-327D0FN-A6S0E1 199416	
			✓	✓	✓	-	FS2		DC1-327D0FB-A660E1 199417	
			✓	✓	✓	✓			DC1-327D0FB-A6S0E1 199418	
10.5	2.2	3	✓	✓	✓	-			DC1-32011FB-A660E1 199419	
			✓	✓	✓	✓			DC1-32011FB-A6S0E1 199420	
18 ⁵⁾	4	5	✓	✓	✓	-	FS3		DC1-32018FB-A660E1 199421	
			✓	✓	✓	✓			DC1-32018FB-A6S0E1 199422	
24 ⁵⁾	5.5	7.5	✓	✓	✓	-			DC1-32024FB-A660E1 199423	
			✓	✓	✓	✓			DC1-32024FB-A6S0E1 199424	
30 ⁵⁾	7.5	7.5	✓	✓	✓	-	FS4		DC1-32030FB-A660E1 199425	
			✓	✓	✓	✓			DC1-32030FB-A6S0E1 199426	
46 ⁵⁾	11	15	✓	✓	✓	-			DC1-32046FB-A660E1 199427	
			✓	✓	✓	✓			DC1-32046FB-A6S0E1 199428	

Notes


¹⁾ Overload cycle: 150% for 60 s every 600 s

²⁾ At 230 V, 50 Hz/at 220 - 240 V, 60 Hz

³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

⁴⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +40 °C

⁵⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C



2.2

DC1 variable frequency drives

DC1, for three-phase motors 400 V, IP66

Rated operational current ¹⁾⁴⁾	Assigned motor output ¹⁾²⁾³⁾		Configuration				Frame size	Protection type	Model code Catalog number	Std. pack
	I _e	P	P	Radio interference suppression filter	Brake chopper	7-segment display				
A	kW	HP								
PowerXL DC1 variable frequency drives										
U ₂ 400 V AC, three-phase / U ₂ 400 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 380 (-10%) - 480 (+10%) V										
2.2	0.75	1	✓	-	✓	-	FS1	IP66/NEMA 4X	DC1-342D2FN-A660E1 199429	1 unit
			✓	-	✓	✓			DC1-342D2FN-A6S0E1 199430	
4.1	1.5	2	✓	-	✓	-			DC1-344D1FN-A660E1 199431	
			✓	-	✓	✓			DC1-344D1FN-A6S0E1 199432	
			✓	✓	✓	-	FS2		DC1-344D1FB-A660E1 199433	
			✓	✓	✓	✓			DC1-344D1FB-A6S0E1 199434	
5.8	2.2	3	✓	✓	✓	-			DC1-345D8FB-A660E1 199435	
			✓	✓	✓	✓			DC1-345D8FB-A6S0E1 199436	
9.5	4	5	✓	✓	✓	-			DC1-349D5FB-A660E1 199437	
			✓	✓	✓	✓			DC1-349D5FB-A6S0E1 199438	
14 ⁵⁾	5.5	7.5	✓	✓	✓	-	FS3		DC1-34014FB-A660E1 199439	
			✓	✓	✓	✓			DC1-34014FB-A6S0E1 199440	
18 ⁵⁾	7.5	10	✓	✓	✓	-			DC1-34018FB-A660E1 199441	
			✓	✓	✓	✓			DC1-34018FB-A6S0E1 199442	
24 ⁵⁾	11	15	✓	✓	✓	-			DC1-34024FB-A660E1 199443	
			✓	✓	✓	✓			DC1-34024FB-A6S0E1 199444	
30 ⁵⁾	15	20	✓	✓	✓	-	FS4		DC1-34030FB-A660E1 199445	
			✓	✓	✓	✓			DC1-34030FB-A6S0E1 199446	
39 ⁵⁾	18.5	25	✓	✓	✓	-			DC1-34039FB-A660E1 199447	
			✓	✓	✓	✓			DC1-34039FB-A6S0E1 199448	
46 ⁵⁾	22	30	✓	✓	✓	-			DC1-34046FB-A660E1 199449	
			✓	✓	✓	✓			DC1-34046FB-A6S0E1 199450	

Notes









¹⁾ Overload cycle: 150% for 60 s every 600 s

²⁾ At 400 V, 50 Hz/at 440 - 480 V, 60 Hz

³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

⁴⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +40 °C

⁵⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C






	Description	Length m	For use with	Model code Catalog number	Std. pack
	External keypad With 7-digital display assembly Front IP54 With approx. 3 m-long, plug-in connection cable (RJ45, 8-pin)	3	DE1, DE11, DC1, DB1, DA1	DX-KEY-LED2 186946	1 unit
	With multi-language plain text display (OLED) Front IP54 With approx. 3 m-long, plug-in connection cable (RJ45, 8-pin)	3	DC1, DB1, DA1, RAM05, RASP5	DX-KEY-OLED 169133	
Expansion modules					
Output expansion					
	2 relay outputs N/O, 250 V AC/220 V DC, max. 1 A) 1 analog output (0 - +10 V, max. 20 mA) For connecting to the control signal terminals on the DC1	–	DC1	DXC-EXT-2R01A0 169030	1 unit
	2 relay outputs N/O, 250 V AC/220 V DC, max. 1 A) For connecting to the control signal terminals on the DC1	–	DC1	DXC-EXT-2R0 169031	
	Coupling module				
	115 V AC input (electrically isolated) for 4 digital inputs For connecting to the control signal terminals on the DC1	–	DC1	DXC-EXT-IO110 169032	1 unit
	230 V AC input (electrically isolated) for 4 digital inputs For connecting to the control signal terminals on the DC1	–	DC1	DXC-EXT-IO230 169033	
	Communication modules				
	PROFINET PROFINET plug-in module (front) with 2 x RJ45, 8 pole, PROFIdrive profile		DE1, DE11, DC1 (IP20)	DX-NET-PROFINET2-2 184947	1 unit
	Ethernet/IP Ethernet/IP plug-in module (front) with 2 x RJ45, 8 pole	–	DE1, DE11, DC1 (IP20)	DX-NET-ETHERNET2-2 184969	1 unit
	SmartWire-DT Plug-in module (front) with slot for SWD4-8SF2-5 external device plug	–	DE1, DE11, DC1 (IP20)	DX-NET-SWD3 169131	1 unit
	Parameter assignment				
	Parameter storage unit and Bluetooth communication stick For storage, copying parameters, and/or transferring parameters to a PC or smartphone (iOS or Android) via Bluetooth with the drivesConnect software or the drivesConnect mobile app respectively With 2 function keys for uploading and downloading parameters with parameter memory.	–	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-COM-STICK3 197585	1 unit
	Programming cable				
	Interface converter USB/RS485 with connection cable, RJ45 8 pole For storage, copying parameters, and/or transferring parameters to a PC with the drivesConnect software, electrically isolated	3	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-CBL-PC-3M0 744-A3036-00P	1 unit

2.2

DC1 variable frequency drives


Accessories

DC1


Description	Length m	For use with	Model code Catalog no.	Std. pack	
Connection cable					
 Patch cord with RJ45 plugs, 8 pole	0.5	DE1, DE11, DC1, DB1, DA1	DX-CBL-RJ45-0M5 169137	1 unit	
	1		DX-CBL-RJ45-1M0 169138		
	3		DX-CBL-RJ45-3M0 169139		
Bus terminating resistor					
 RJ45 8 pole Connection to CANopen (pin 1/2, 124 Ω) or to Modbus RTU (pin 7/8, 120 Ω)	–	DX-SPL-RJ45-2SL-1PL	EASY-NT-R 256281	2 units	
Splitter					
 RJ45, 8-pin, 3 sockets	–	DX-CBL-RJ45...	DX-SPL-RJ45-3SL 169141	1 unit	
 RJ45, 8-pin, 2 sockets/1 plug	–	DE1, DE11, DC1, DB1, DA1	DX-SPL-RJ45-2SL1PL 169142		
Mounting accessories					
 Mounting adapter with gland plates For installing the connection cables on the mains side	Size FS1	–	DC1 (IP20)	DX-EMC-MNT-1N 172925	1 unit
	Size FS2	–	DC1 (IP20), DA1 (IP20)	DX-EMC-MNT-2N 172927	
	Size FS3	–	DC1 (IP20), DA1 (IP20)	DX-EMC-MNT-3N 172929	
For installing the connection cables on the motor side	Size FS1	–	DC1 (IP20)	DX-EMC-MNT-1M 172926	
	Size FS2	–	DC1 (IP20), DA1 (IP20)	DX-EMC-MNT-2M 172928	
	Size FS3	–	DC1 (IP20), DA1 (IP20)	DX-EMC-MNT-3M 172930	

Engineering


DC1-1DxxxN...

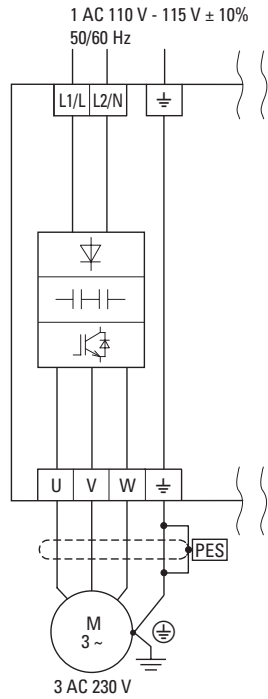



DC1-12...

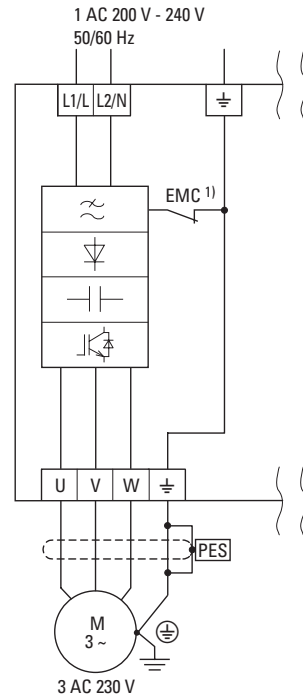

DC1-32...
DC1-34...

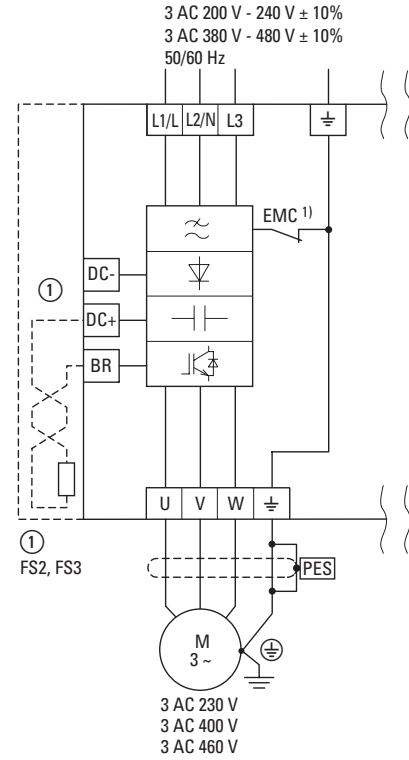

1)

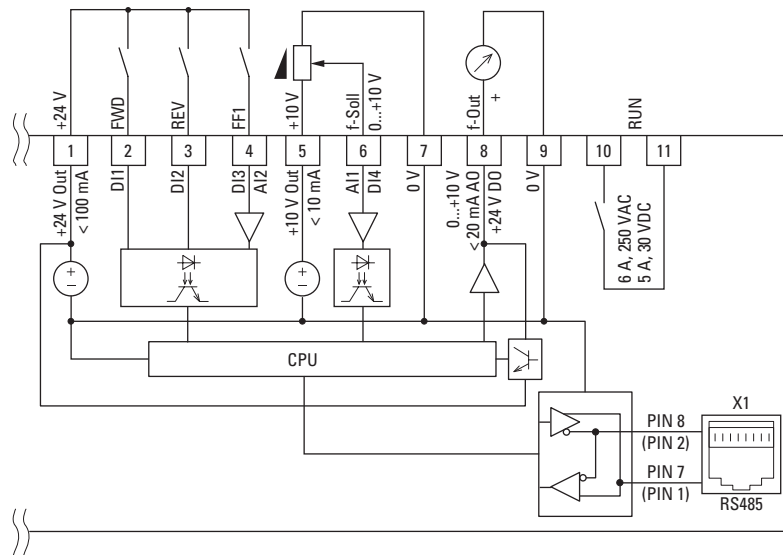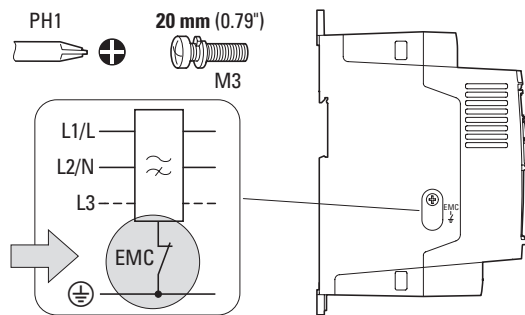


2.2


DC1 variable frequency drives

Connection examples


DC1-S1 -A660E1, DC1-S2 -A660E1

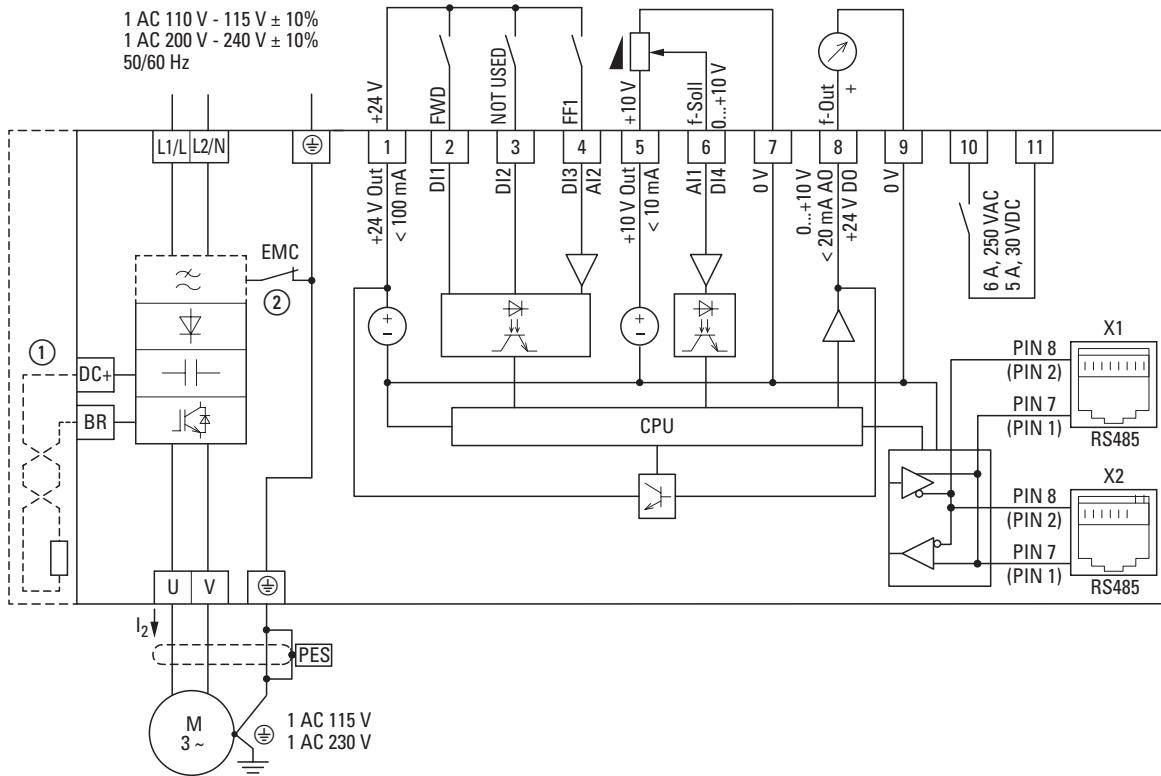


DC1-S1 -A6S0E1, DC1-S2 -A6S0E1

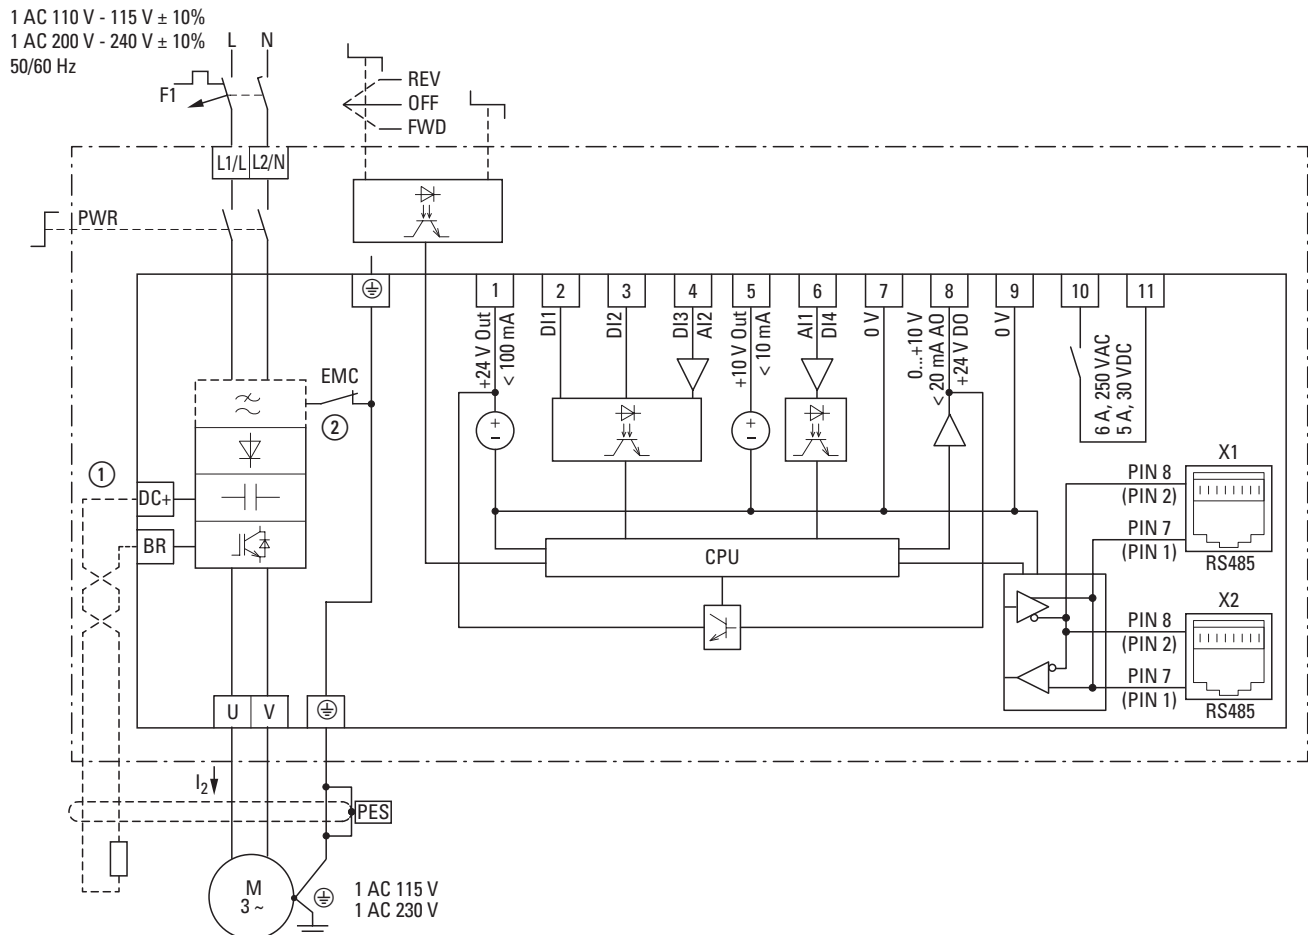


DC1-1D...-A66...

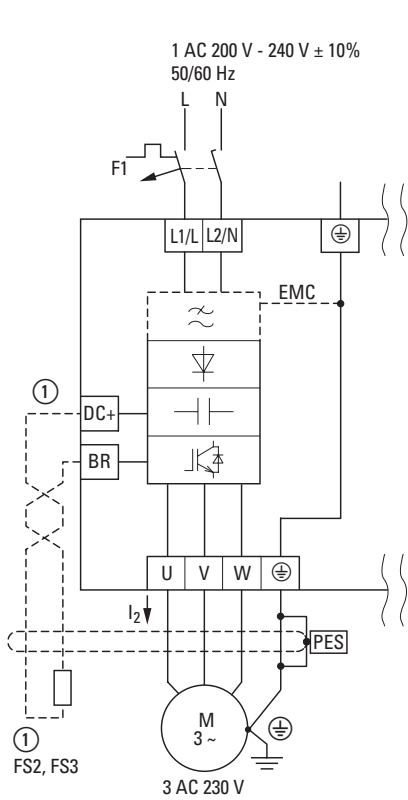


DC1-12...-A66...

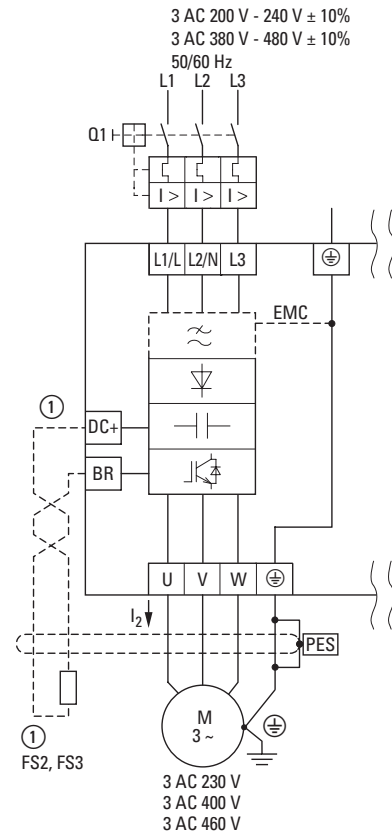

DC1-32...-A66...
DC1-34...-A66...

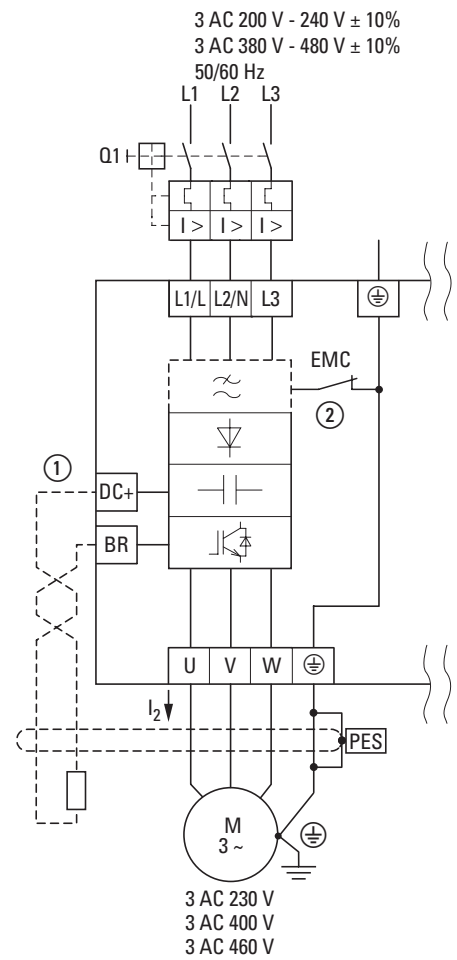

DC1

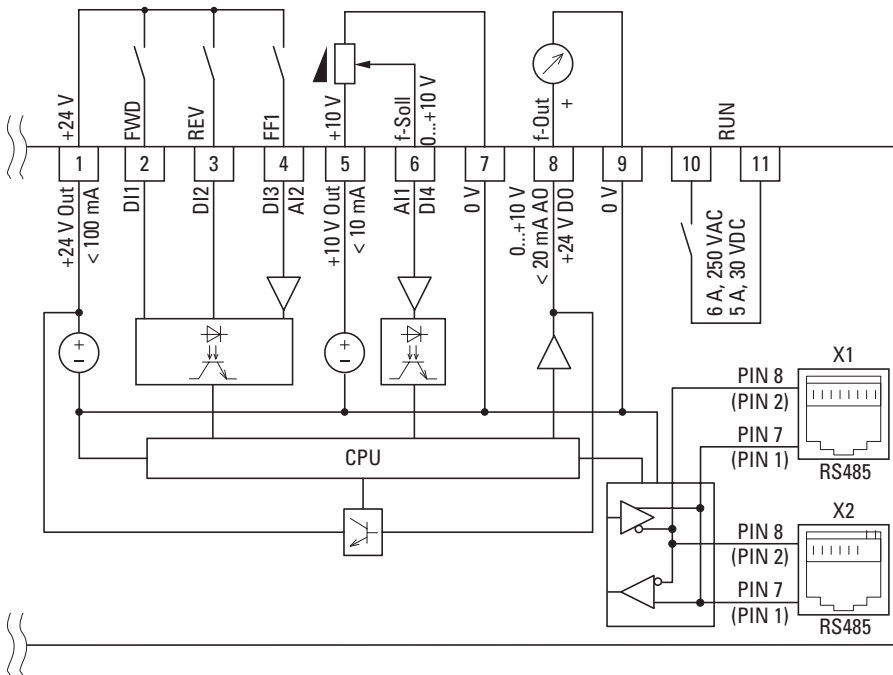


2.2


DC1 variable frequency drives

Connection examples


DC1-1D...-A6S...

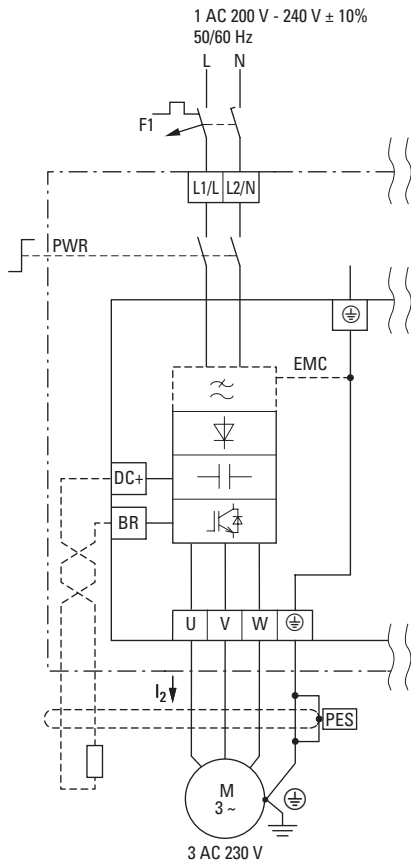


DC1-12...-A6S...

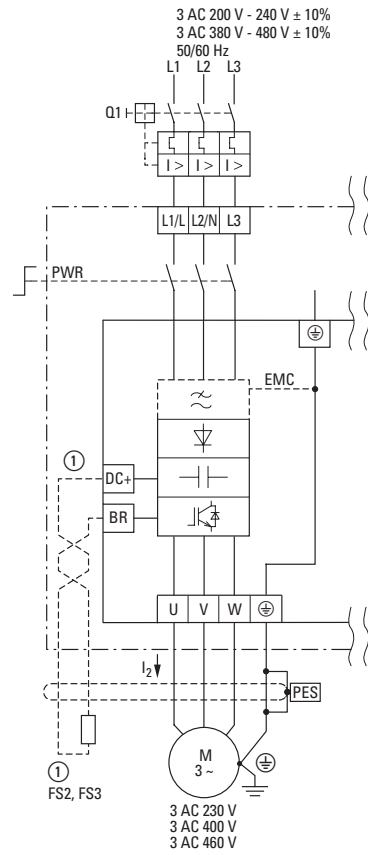

DC1-32...-A6S...
DC1-34...-A6S...

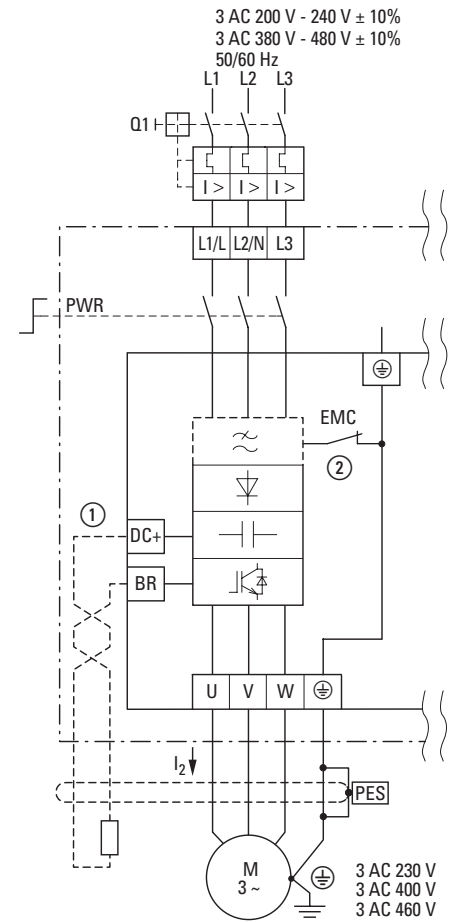

DC1

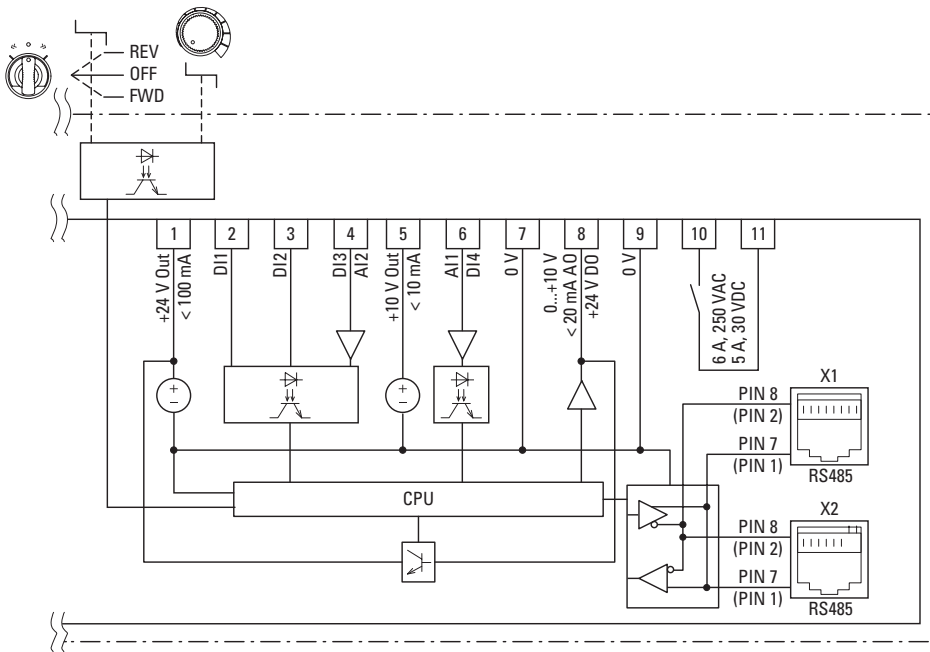

2.2

DC1 variable frequency drives

Assigned switching and protective elements for DC1

Model code	power rating 150 % kW	input current 150 % A	output current 150 % A	MCCB Type 1 coordination @ 150 %	Fuse Type 1 coordination @ 150 %	minimum braking resistance	recommended braking resistance	brake resistor, 10 % duty cycle @ 150 %	brake resistor, 20 % duty cycle @ 150 %	brake resistor, 40 % duty cycle @ 150 %
115 V AC, single-phase/115 V AC, single-phase										
DC1-S17D0...	0.37	12.9	7	PKZM0-20	C10G20	-	-	-	-	-
DC1-S1011...	0.55	19.2	10.5	PKZM0-32	C10G32	100	100	DX-BR3-100	DX-BR3-100	DX-BR100-600
230 V AC, single-phase/230 V AC, single-phase										
DC1-S24D3...	0.37	7.5	4.3	PKZM0-12	C10G12	-	-	-	-	-
DC1-S27D0...	0.75	12.9	7	PKZM0-20	C10G20	-	-	-	-	-
DC1-S2011...	1.1	19.2	10.5	PKZM0-32	C10G32	100	100	DX-BR3-100	DX-BR100-600	DX-BR100-1K1
115 V AC, single-phase/230 V AC, three-phase										
DC1-1D2D3...	0.37	7.8	2.3	PKZM0-12	C10G12	-	-	-	-	-
DC1-1D4D3...	0.75	15.8	4.3	PKZM0-25	C10G25	-	-	-	-	-
DC1-1D5D8...	1.1	21.9	5.8	PKZM4-40	C22G40	100	100	DX-BR3-100	DX-BR100-600	DX-BR100-1K1
230 V AC, single-phase/230 V AC, three-phase										
DC1-122D3...	0.37	3.7	2.3	PKZM0-6,3	C10G8	-	-	-	-	-
DC1-124D3...	0.75	7.5	4.3	PKZM0-12	C10G12	-	-	-	-	-
DC1-127D0...	1.5	12.9	7	PKZM0-20	C10G20	100	100	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K1
DC1-12011...	2.2	19.2	10.5	PKZM0-32	C10G32	50	50	DX-BR050-600	DX-BR050-0K8	DX-BR047-3K1
DC1-12015...	4	29.2	15.3	PKZM4-50	C22G50	22	25	DX-BR022-1K4	DX-BR022-1K4	DX-BR022-3K1
230 V AC, three-phase/230 V AC, three-phase										
DC1-322D3...	0.37	3.4	2.3	PKZM0-6,3	C10G8	-	-	-	-	-
DC1-324D3...	0.75	5.6	4.3	PKZM0-10	C10G10	-	-	-	-	-
DC1-327D0...	1.5	9.5	7	PKZM0-16	C10G16	100	100	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K1
DC1-32011...	2.2	12.1	10.5	PKZM0-20	C10G20	50	50	DX-BR050-600	DX-BR050-0K8	DX-BR047-3K1
DC1-32018...	4	20.9	18	PKZM0-32	C10G32	24	25	DX-BR035-1K1	DX-BR040-3K1	DX-BR040-3K1
DC1-32024...	5.5	26.4	24	PKZM4-40	C22G40	20	20	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-5K1
DC1-32030...	7.5	33.3	30	PKZM4-50	C22G50	15	15	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-5K1
DC1-32046...	11	50.1	46	NZMC1-A80	C22G80	10	10	DX-BR012-3K1	DX-BR012-5K1	DX-BR012-9K2
400 V AC, three-phase/400 V AC, three-phase										
DC1-342D2...	0.75	3.5	2.2	PKZM0-6,3	C10G8	-	-	-	-	-
DC1-344D1...	1.5	5.6	4.1	PKZM0-10	C10G10	210	250	DX-BR200-0K8	DX-BR216-600	R: 2x DX-BR150-1K1
DC1-345D8...	2.2	7.5	5.8	PKZM0-12	C10G12	200	200	DX-BR200-0K8	R: 2x DX-BR100-1K1	R: 2x DX-BR100-1K6
DC1-349D5...	4	11.5	9.5	PKZM0-20	C10G20	120	120	DX-BR150-1K1	R: 2x DX-BR075-5K1	R: 2x DX-BR075-5K1
DC1-34014...	5.5	17.2	14	PKZM0-32	C10G32	100	100	DX-BR100-1K1	R: DX-BR047-3K1	R: 2x DX-BR050-5K1
DC1-34018...	7.5	21.2	18	PKZM0-32	C10G32	80	80	DX-BR100-1K6	R: 2x DX-BR047-3K1	R: 2x DX-BR050-5K1
DC1-34024...	11	27.5	24	PKZM4-50	C22G50	50	50	DX-BR047-3K1	DX-BR050-5K1	DX-BR047-9K2
DC1-34030...	15	34.2	30	PKZM4-63	C22G63	30	30	DX-BR040-3K1	DX-BR040-5K1	DX-BR047-9K2
DC1-34039...	18.5	44.1	39	NZMC1-A80	C22G80	22	22	DX-BR022-5K1	DX-BR022-9K2	P: 2x DX-BR047-9K2
DC1-34046...	22	51.9	46	NZMC1-A80	C22G80	22	22	DX-BR022-5K1	DX-BR022-9K2	P: 2x DX-BR047-9K2

Notes
 R: = mount in series
 P: = mount in parallel

Assigned switching and protective elements for DC1

RCD type @ 150 %	optional mains contactor @ 150 %	External EMC filter @ 150 %	External EMC filter (low leakage current) @ 150 %	Mains choke @ 150 %	U _k	Passive harmonic filter @ 150 %	Motor choke @ 150 %	Sine filter @ 150 %	All-pole sine filter @ 150 %
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-016	DX-EMC12-016-SL	DX-LN1-018	4 %	-	-	-	-
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC12-020	DX-EMC12-020-SL	DX-LN1-024	4 %	-	-	-	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-008	DX-EMC12-008-SL	DX-LN1-009	4 %	-	-	-	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-016	DX-EMC12-016-SL	DX-LN1-018	4 %	-	-	-	-
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC12-020	DX-EMC12-020-SL	DX-LN1-024	4 %	-	-	-	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-008	DX-EMC12-008-SL	DX-LN1-009	4 %	-	DX-LM3-008	DX-SIN3-004	DX-SIN3-2D5-A
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC12-016	DX-EMC12-016-SL	DX-LN1-018	4 %	-	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC12-025	DX-EMC12-025-SL	DX-LN1-024	4 %	-	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-004	DX-EMC12-004-SL	DX-LN1-006	4 %	-	DX-LM3-008	DX-SIN3-004	DX-SIN3-2D5-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-008	DX-EMC12-008-SL	DX-LN1-009	4 %	-	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-016	DX-EMC12-016-SL	DX-LN1-018	4 %	-	DX-LM3-008	DX-SIN3-010	DX-SIN3-013-A
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC12-020	DX-EMC12-020-SL	DX-LN1-024	4 %	-	DX-LM3-011	DX-SIN3-016	DX-SIN3-013-A
FRCdM-63/4/003-G/Bfq	DILM40(RDC24)	DX-EMC12-030	DX-EMC12-030-SL	DX-LN1-032	4 %	-	DX-LM3-016	DX-SIN3-016	DX-SIN3-024-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-004	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-004	DX-SIN3-2D5-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-006	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016-L	DX-LN3-010	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	DX-SIN3-013-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016-L	DX-LN3-016	4 %	DX-PHF34-019	DX-LM3-011	DX-SIN3-016	DX-SIN3-013-A
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030-L	DX-LN3-025	4 %	DX-PHF34-026	DX-LM3-035	DX-SIN3-023	DX-SIN3-024-A
FRCdM-63/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030-L	DX-LN3-040	2.5 %	DX-PHF34-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-024-A
FRCdM-63/4/003-G/Bfq	DILM40(RDC24)	DX-EMC34-042	DX-EMC34-042-L	DX-LN3-040	2.5 %	DX-PHF34-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-046-A
-	DILM50(RDC24)	DX-EMC34-055	DX-EMC34-055-L	DX-LN3-060	2.5 %	DX-PHF34-073	DX-LM3-050	DX-SIN3-048	DX-SIN3-046-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-004	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-004	DX-SIN3-2D5-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-006	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-010	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016-L	DX-LN3-016	4 %	DX-PHF34-019	DX-LM3-011	DX-SIN3-010	DX-SIN3-013-A
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030-L	DX-LN3-025	4 %	DX-PHF34-019	DX-LM3-016	DX-SIN3-016	DX-SIN3-024-A
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030-L	DX-LN3-025	4 %	DX-PHF34-026	DX-LM3-035	DX-SIN3-023	DX-SIN3-024-A
FRCdM-63/4/003-G/Bfq	DILM40(RDC24)	DX-EMC34-030	DX-EMC34-030-L	DX-LN3-040	2.5 %	DX-PHF34-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-024-A
FRCdM-63/4/003-G/Bfq	DILM40(RDC24)	DX-EMC34-042	DX-EMC34-042-L	DX-LN3-040	2.5 %	DX-PHF34-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-046-A
-	DILM50(RDC24)	DX-EMC34-055	DX-EMC34-055-L	DX-LN3-060	2.5 %	DX-PHF34-044	DX-LM3-050	DX-SIN3-048	DX-SIN3-046-A
-	DILM50(RDC24)	DX-EMC34-055	DX-EMC34-055-L	DX-LN3-060	2.5 %	DX-PHF34-073	DX-LM3-050	DX-SIN3-048	DX-SIN3-046-A

Technical specifications

	Symbol	Unit	Value
General			
Standards			EMC: EN 61800-3:2004+A1-2012 Radio interference: EN 55011: 2010 Security: EN 61800-5: 2007 Degree of protection: EN 60529: 1992 Soiling: IEC 721-3-3
Certifications and manufacturer's declarations on conformity			CE, UL, cUL, c-Tick, UkrSEPRO, Gost-R
Production quality			RoHS, ISO 9001
Climatic proofing	pw	%	< 95%, average relative humidity (RH), non-condensing (EN 50178)
Ambient temperature			
Operation			
IP20 (NEMA 0)	θ	°C	-10 - +50 without derating -10 - +45 at DC1-12011... and DC1-32011..., UL compliance over a period of 24 hours
IP66 (NEMA 4X)	θ	°C	-20 - +40 without derating
Storage	θ	°C	-40 - +60 (frost-free and condensation-free)
Pollution degree			
Non-conductive dust permissible			
Transport			
IP20: Class 1C2 (chemical gases), Class 1S2 (solid particles) IP66: Class 1C3 (chemical gases), Class 1S3 (solid particles)			
Storage			
IP20: Class 2C2 (chemical gases), Class 2S2 (solid particles) IP66: Class 2C3 (chemical gases), Class 2S3 (solid particles)			
Operation			
IP20: Class 3C2 (chemical gases), Class 3S2 (solid particles) IP66: Class 3C3 (chemical gases), Class 3S3 (solid particles)			
Vibration level (not evaluated during operation)			
Shock test			
Pulse shape			
			Half sinus
Top acceleration		g	15
Time window		ms	11
Vibration test			
Frequency range		f	Hz
			10 - 150 10 - 57.55: 0.15 mm peak-peak 57.55 - 150: 1 g Top acceleration
Vibration evaluation			1 octave/minute
MTBF (mean time between failures)		Years	157
Electrostatic discharge (ESD, EN 61000-4-2:2009)		U	kV
			±4, contact discharge / ±8, air discharge
Fast transient burst (EFT/B, EN 61000-4-4: 2004)		U	kV
			±1, at 5 kHz, control signal terminal ±2, at 5 kHz, motor connection terminals, single-phase mains connection terminals ±4, at 5 kHz, three-phase mains connection terminals
Overvoltage (surge, EN 61000-4-5: 2006)			
110 - 115 V, 200 - 240 V		U	kV
			±1, phase to phase/neutral conductor ±2, phase/neutral conductor to earth
380 - 480 V		U	kV
			±2, phase to phase ±4, phase to earth
Electric strength (flash, EN 61800-5-1: 2007)			
110 - 115 V, 200 - 240 V		U	kV
			1.5
380 - 480 V		U	kV
			2.5
Radio interference class (EMC)			
Maximum screened motor cable length with integrated radio interference suppression filter			
Category C1		l	m
			1, only for DC1-122D3F... to DC1-12011F...(FS1, FS2)
Category C2		l	m
			5
Category C3		l	m
			25
Mounting position			vertical
Altitude		h	m
			0 - 1000 above sea level, > 1000 with 1% load current reduction every 100 m, maximum 2000 with UL approval, maximum 4000 without UL approval
Protection type			IP20 (NEMA 0) / IP66 (NEMA 4X)
Protection against contact			BGV A3 (VBG4, finger- and back-of-hand proof)

	Symbol	Unit	Value
Main circuit / power section			
Feeder			
Rated operating voltage			
DC1-1D...	U_e	V	1~ 110 (110 V (-10%) - 115 V (+10%)) → $U_2 = 230$ V
DC1-12...	U_e	V	1~ 230 (200 V (-10%) - 240 V (+10%))
DC1-32...	U_e	V	3~ 230 (200 V (-10%) - 240 V (+10%))
DC1-34...	U_e	V	3~ 400 (380 V (-10%) - 480 V (+10%))
Single-phase power supply with DC1-3... units			When powered with a single-phase power supply, variable frequency drives from the DC1-32... and DC1-34... series can be operated with a maximum of 50% of the device's rated operational current (I_e).
Mains frequency	f	Hz	50/60 ±10%
Phase imbalance		%	max. 3
Maximum short-circuit current (supply voltage)	SCCR	kA	100
Mains switch-on frequency			Maximum of one time every 30 seconds
Mains network configuration (AC supply system)			TN and TT network with directly earthed neutral point. IT earthing systems with PCM insulation monitoring relays only. Operation on phase-earthed networks is only permissible up to a maximum phase-earth voltage of 300 V AC.
Inrush current	I	A	< I_{LN}
Motor feeder			
Output voltage			
DC1-1D...	U_2	V	3~ 0 - 2 x U_e (voltage doubler)
DC1-12..., DC1-32..., DC1-34...	U_2	V	3~ 0 - U_e
Maximum motor power cable length	l	m	100 (screened) 200 (unshielded)
Assigned motor output			
at 230 V, 50 Hz	P	kW	0.37 - 4
at 400 V, 50 Hz	P	kW	0.75 - 22
Output frequency			
Range, parameterizable	f_2	Hz	0 - 50/60 (max. 500 Hz)
Resolution		Hz	0.1
Rated operational current	I_e	A	2.3 - 46
Overload current for 60 s every 600 s	I_L	%	150
Overload current for 2.5 s every 600 s	I_L	%	175
Switching frequency (double modulation)	f_{PWM}	kHz	max. 32
Operating mode			
V/Hz control (speed accuracy)			±20%, with slip compensation
Vector control (static speed accuracy)			±0.033% ±1% load range: 0 - 100%
Torque response time	t_r	ms	1 - 8
Torque linearity			±5% (10 - 90% of speed variable range, 20 - 100% of torque load range)
Response time (enable IGBT)	t_r	ms	< 10
DC braking			
Time before start	t	s	0 - 25, in the event of a stop
Motor pick-up control function (for catching spinning motors)			all frame sizes
Brake chopper			only for sizes FS2 to FS4
Braking current during continuous operation		%	100 (I_e)
Maximum braking current		%	150 for 60 s

2.2

DC1 variable frequency drives

General rated operational data

	Symbol	Unit	Value
Control section			
Control voltage			
Output voltage (control signal terminal 1)	U_c	V DC	24
Load rating (control signal terminal 1)	I_1	mA	100
Reference voltage (control signal terminal 5)	U_s	V DC	10
Load rating (control signal terminal 5)	I_s	mA	10
Digital Input (DI)			
Qty.			2 - 4
Logic (level)			increase (NPN)
Time of reaction	t_r	ms	< 8
Input voltage range High (1)	U_c	V DC	8 - 30
Input voltage range Low (0)	U_c	V DC	0 - 4
Analog Input (AI)			
Qty.			0 - 2
Resolution		Bit	12
Accuracy		%	< 1 to the final value
Time of reaction	t_r	ms	< 16
Input voltage range	U_s	V	0 - 10, DC ($R_i \sim 72 \text{ k}\Omega$)
Input current range	I_s	mA	0/4 - 20 ($R_B \sim 500 \Omega$)
Relay output (RO1)			
Qty.			1 relays
Relay contact			Make
Switching capacity			
AC	I	A	6 (250 V AC)
DC	I	A	5 (30 V AC)
Digital output (DO)			
Qty.			0 - 1
Output voltage	U_{out}	V	+24
Load rating (control signal terminal 8)	I_g	mA	max. 20
Analog output (AO)			
Qty.			0 - 1
Output voltage	U_{out}	V	0 - +10
Load rating (control signal terminal 8)	I_g	mA	max. 20
Resolution		Bit	10
Accuracy		%	< 1 to the final value
Interface (RJ45)			
			OP bus, Modbus RTU, CANopen, RS485
Response time (after valid command)	t_r	ms	< 8 (Modbus, CANopen) < 8 (OP bus: Master slave, 60 ms cycle)

Variable frequency drives with voltage doubler

$$U_{LN} = 2 \times U_2: 115 \text{ V} \rightarrow 230 \text{ V}$$

Size	Symbol	Unit	2D3	4D3	5D8
DC1-1D...device series					
Rated operational current	I_e	A	2.3	4.3	5.8
Overload current for 60 s every 600 s	I_L	A	3.45	6.45	8.7
Overload current for 2.5 s every 600 s	I_L	A	4.03	7.53	10.15
Apparent power at rated operation ¹⁾ 230 V	S	kVA	0.92	1.71	2.31
Assigned motor power					
at 230 V, 50 Hz	P	kW	0.37	0.75	1.1
at 220 - 240 V, 60 Hz	P	HP	0.5	1	1.5
Power side (primary side):					
Number of phases			single-phase or two-phase		
Device voltage rating	U_{LN}	V	110 (-10%) - 115 (+10%), 48 - 62 Hz 99 - 126 ±0%		
Input current (phase current)	I_{LN}	A	7.8	15.8	21.9
Minimum braking resistance	R_B	Ω	–	–	100
Switching frequency (pulse frequency)					
Default settings	f_{PVM}	kHz	8	8	8
Setting range	f_{PVM}	kHz	4 - 32	4 - 32	4 - 32
Voltage Boost (U_{Boost}/U_{LN})					
Default settings		%	3	3	2.5
Max. value		%	25	25	20
Maximum leakage current (contact current) to earth (PE), at U_{LN} : 120 V, without motor	I_{Touch}	mA	4.8	4.8	4.8
Efficiency	η		0.95	0.95	0.95
Heat dissipation					
at I_e (150%)	P_V	W	18.5	37.5	44
During no-load running, standby (locked, without fan)	P_V	W	3.07	3.07	4.51
Fans			–	✓ ¹⁾	✓ ¹⁾
Frame size			FS1	FS1	FS2

Notes ¹⁾ Not with IP66 degree of protection

2.2

DC1 variable frequency drives

Specific rated operational data

Size	Symbol	Unit	2D3	4D3	7D0NN 7D0FN	7D0NB 7D0FB	011	015
DC1-12...device series								
Rated operational current	I_b	A	2.3	4.3	7	7	10.5	15
Overload current for 60 s every 600 s	I_L	A	3.45	6.45	10.5	10.5	15.75	22.5
Overload current for 2.5 s every 600 s	I_L	A	4.03	7.53	12.25	12.25	18.38	26.25
Apparent power at rated operation 230 V	S	kVA	0.92	1.71	2.79	2.79	4.18	5.98
Apparent power at rated operation 240 V	S	kVA	0.96	1.79	2.91	2.91	4.36	6.24
Assigned motor power								
at 230 V, 50 Hz	P	kW	0.37	0.75	1.5	1.5	2.2	4
at 220 - 240 V, 60 Hz	P	HP	0.5	1	2	2	3	5
Power side (primary side):								
Number of phases	single-phase or two-phase							
Device voltage rating	U_{LN}	V	200 (-10%) - 240 (+10%), 50/60 Hz 180 - 264 ±0%, 48 - 62 Hz ±0%					
Input current (phase current)	I_{LN}	A	3.7	7.5	12.9	12.9	19.2	29.2
Minimum braking resistance	R_B	Ω	–	–	–	100	50	25
Switching frequency (pulse frequency)								
Default settings	f_{PWM}	kHz	8	8	8	8	8	8
Setting range	f_{PWM}	kHz	4 - 32	4 - 32	4 - 32	4 - 32	4 - 32	4 - 24
Voltage Boost (U_{boost}/U_{LN})								
Default settings		%	3	3	3	2.5	2.5	2
Max. value		%	25	25	25	20	20	15
Maximum leakage current to earth (PE), at U_{LN} : 240 V, without motor	I_{PE}	mA	4.8	4.8	4.8	4.8	4.8	4.7
Efficiency	η		0.95	0.94	0.96	0.96	0.95	0.96
Heat dissipation								
at I_b (150%)	P_V	W	18.5	45.75	63	63	103.4	160
During no-load running, standby (locked, without fan)	P_V	W	3.07	3.07	3.07	4.51	4.51	5.16
Fans			–	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾
Frame size			FS1	FS1	FS1	FS2	FS2	FS3

Notes ¹⁾ Not with IP66 degree of protection

Size	Symbol	Unit	2D3	4D3	7D0NN	7D0NB 7D0FB
DC1-32...device series						
Rated operational current	I_b	A	2.3	4.3	7	7
Overload current for 60 s every 600 s	I_L	A	3.45	6.45	10.5	10.5
Overload current for 2.5 s every 600 s	I_L	A	4.03	7.53	12.25	12.25
Apparent power at rated operation 230 V	S	kVA	0.92	1.71	2.79	2.79
Apparent power at rated operation 240 V	S	kVA	0.96	1.79	2.91	2.91
Assigned motor power						
at 230 V, 50 Hz	P	kW	0.37	0.75	1.5	1.5
at 220 - 240 V, 60 Hz	P	HP	0.5	1	2	2
Power side (primary side):						
Number of phases			3	3	3	3
Device voltage rating	U_{LN}	V	200 (-10%) - 240 (+10%), 50/60 Hz 180 - 264 \pm 0%, 48 - 62 Hz \pm 0%			
Input current (phase current)	I_{LN}	A	3.4	5.6	9.5	8.9
Minimum braking resistance	R_B	Ω	–	–	–	100
Switching frequency (pulse frequency)						
Default settings	f_{PWM}	kHz	8	8	8	8
Setting range	f_{PWM}	kHz	4 - 32	4 - 32	4 - 32	4 - 32
Voltage Boost (U_{boost}/U_{LN})						
Default settings		%	3	3	3	2.5
Max. value		%	25	25	25	20
Maximum leakage current (contact current) to earth (PE), at U_{LN} : 240 V, without motor	I_{Touch}	mA	7.5	7.5	7.5	7.2
Efficiency	η		0.96	0.95	0.96	0.96
Heat dissipation						
at I_b (150%)	P_V	W	14.8	39.75	61.5	61.5
During no-load running, standby (locked, without fan)	P_V	W	3.07	3.07	3.07	4.51
Fans			–	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾
Frame size			FS1	FS1	FS1	FS2

Notes ¹⁾ Not with IP66 degree of protection

2.2

DC1 variable frequency drives

Specific rated operational data

Size	Symbol	Unit	011	018	024	030	046
DC1-32...device series							
Rated operational current	I_e	A	10.5	18	24	30	46
Overload current for 60 s every 600 s	I_L	A	15.75	27	36	45	69
Overload current for 2.5 s every 600 s	I_L	A	18.38	31.5	42	52.5	80.5
Apparent power at rated operation 230 V	S	kVA	4.18	7.17	9.55	11.94	18.30
Apparent power at rated operation 240 V	S	kVA	4.36	7.48	9.96	12.46	19.10
Assigned motor power							
at 230 V, 50 Hz	P	kW	2.2	4	5.5	7.5	11
at 220 - 240 V, 60 Hz	P	HP	3	5	7.5	10	15
Power side (primary side):							
Number of phases			3	3	3	3	3
Device voltage rating	U_{LN}	V	200 - (10%) - 264 (+10%), 50/60 Hz 180 - 264 \pm 0%, 48 - 62 Hz \pm 0%				
Input current (phase current)	I_{LN}	A	12.1	20.9	26.4	33.3	50.1
Minimum braking resistance	R_B	Ω	50	25	20	15	10
Switching frequency (pulse frequency)							
Default settings	f_{PWM}	kHz	8	8	8	8	8
Setting range	f_{PWM}	kHz	4 - 32	4 - 24	4 - 24	4 - 24	4 - 24
Voltage Boost (U_{Boost}/U_{LN})							
Default settings		%	2.5	2	2	1.5	1.5
Max. value		%	20	15	15	10	10
Maximum leakage current (contact current) to earth (PE), at U_{LN} : 240 V, without motor	I_{Touch}	mA	7.2	6.8	6.8	6.9	6.9
Efficiency	η		0.96	0.96	0.97	0.97	0.96
Heat dissipation							
at I_e (150%)	P_V	W	90.2	160	223	304	446
During no-load running, standby (locked, without fan)	P_V	W	4.51	5.16	5.16	7.54	7.54
Fans			✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓
Frame size			FS2	FS3	FS3	FS4	FS4

Notes ¹⁾ Not with IP66 degree of protection

Size	Symbol	Unit	2D2	4D1NN 4D1FN	4D1NB 4D1FB	5D8	9D5
DC1-34...device series							
Rated operational current	I_e	A	2.2	4.1	4.1	5.8	9.5
Overload current for 60 s every 600 s	I_L	A	3.3	6.15	6.15	8.7	14.25
Overload current for 3.75 s every 600 s	I_L	A	3.85	7.18	7.18	10.15	16.63
Apparent power at rated operation 400 V	S	kVA	1.52	2.84	2.84	4.02	6.58
Apparent power at rated operation 480 V	S	kVA	1.83	3.41	3.41	4.82	7.9
Assigned motor power							
at 400 V, 50 Hz	P	kW	0.75	1.5	1.5	2.2	4
at 460 V, 60 Hz	P	HP	1	2	2	3	5
Power side (primary side):							
Number of phases			3	3	3	3	3
Device voltage rating	U_{LN}	V	380 (-10%) - 480 (+10%), 50/60 Hz 342 - 528 V $\pm 0\%$, 48 - 62 Hz $\pm 0\%$				
Input current (phase current)	I_{LN}	A	3.5	5.6	5.6	7.5	11.5
Minimum braking resistance	R_B	Ω	–	–	250	200	120
Switching frequency (pulse frequency)							
Default settings	f_{PWM}	kHz	8	8	8	8	8
Setting range	f_{PWM}	kHz	4 - 32	4 - 32	4 - 32	4 - 32	4 - 32
Voltage Boost (U_{boost}/U_{LN})							
Default settings		%	3	3	2.5	2.5	2.5
Max. value		%	25	25	20	20	20
Maximum leakage current (contact current) to earth (PE), at U_{LN} : 400 V, without motor	I_{Touch}	mA	13	13	12.6	12.6	12.6
Efficiency	η		0.92	0.95	0.95	0.95	0.97
Heat dissipation							
at I_e (150%)	P_V	W	33.75	66.5	66.5	101.2	136
During no-load running, standby (locked, without fan)	P_V	W	4.55	4.55	6.44	6.44	6.44
Fans			✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓ ¹⁾
Frame size			FS1	FS1	FS2	FS2	FS2

Notes ¹⁾ Not with IP66 degree of protection

2.2

DC1 variable frequency drives


Specific rated operational data

Size	Symbol	Unit	014	018	024	030	039	046
DC1-34...device series								
Rated operational current	I_e	A	14	18	24	30	39	46
Overload current for 60 s every 600 s	I_L	A	21	27	36	45	58.5	69
Overload current for 3.75 s every 600 s	I_L	A	24.5	31.5	42	52.5	68.25	80.5
Apparent power at rated operation 400 V	S	kVA	9.67	12.47	16.63	20.76	26.99	31.83
Apparent power at rated operation 480 V	S	kVA	11.64	14.96	19.95	24.91	32.39	38.20
Assigned motor power								
at 400 V, 50 Hz	P	kW	5.5	7.5	11	15	18.5	22
at 460 V, 60 Hz	P	HP	7.5	10	15	20	25	30
Power side (primary side):								
Number of phases			3	3	3	3	3	3
Device voltage rating	U_{LN}	V	380 (-10%) - 480 (+10%), 50/60 Hz 342 - 528 V $\pm 0\%$, 48 - 62 Hz $\pm 0\%$					
Input current (phase current)	I_{LN}	A	17.2	21.2	27.5	34.2	44.1	51.9
Minimum braking resistance	R_B	Ω	100	80	50	30	22	22
Switching frequency (pulse frequency)								
Default settings	f_{PWM}	kHz	8	8	8	8	8	8
Setting range	f_{PWM}	kHz	4 - 24	4 - 24	4 - 24	4 - 24	4 - 24	4 - 24
Voltage Boost (U_{Boost}/U_{LN})								
Default settings		%	2	2	2	2	1.5	1.5
Max. value		%	15	15	15	10	10	10
Maximum leakage current to earth (PE), at U_{LN} : 400 V, without motor	I_{Touch}	mA	12.7	12.7	12.7	12.9	12.9	12.9
Efficiency	η		0.96	0.97	0.97	0.97	0.97	0.96
Heat dissipation								
at I_e (150%)	P_V	W	223	304	446	607	728	801
During no-load running, standby (locked, without fan)	P_V	W	6.42	6.42	6.52	14.6	14.6	14.6
Fans			✓ ¹⁾	✓ ¹⁾	✓ ¹⁾	✓	✓	✓
Frame size			FS3	FS3	FS3	FS4	FS4	FS4

Notes ¹⁾ Not with IP66 degree of protection


Dimensions and weights

Sizes FS1 to FS3 in IP20

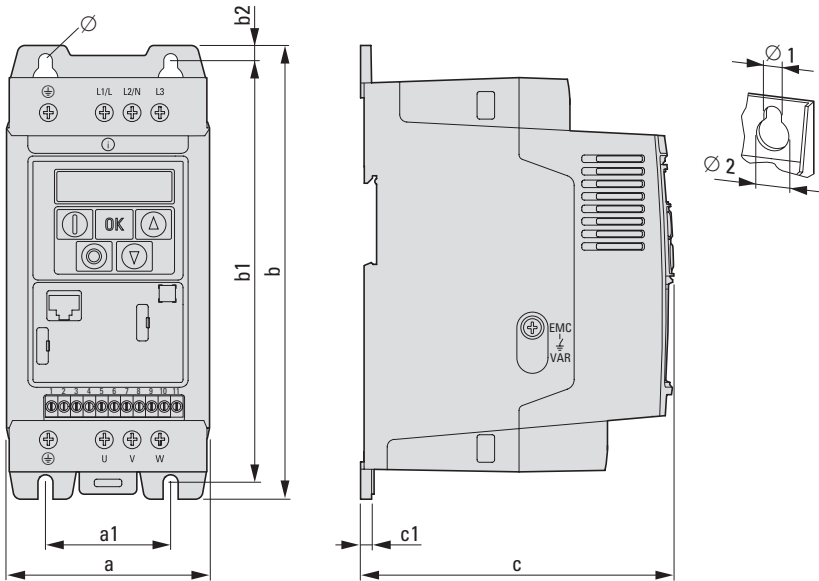

Size	a	a1	b	b1	b2	c	c1	Ø1	Ø2	m
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
FS1	81	50	184	170	7	124	4	6	12	1.1
FS2	107	75	231	215	8	152	5	6	12	2.6
FS3	131	100	273	255	8.5	175	5	6	12	4

Sizes FS1 to FS4 in IP66

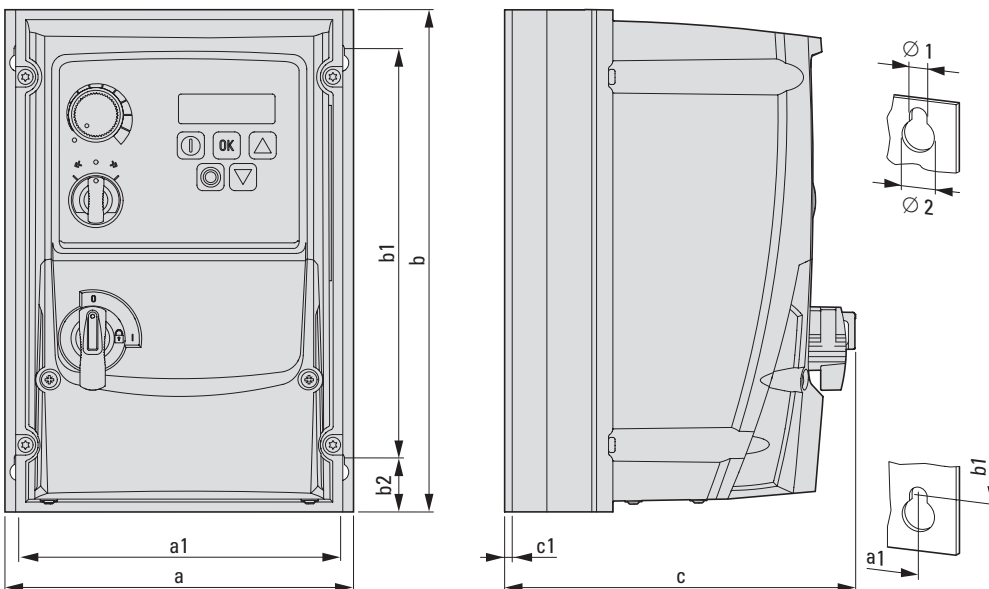

Size	a	a1	b	b1	b2	c	c1	Ø1	Ø2	m
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
FS1	161	148.5	232	189	25	162	3.5	4	8	2.5
FS2	188	176	257	200	28	182	3.5	4.2	8.5	3.5
FS3	211	197.5	310	252	33	238	3.5	4.2	8.5	7
FS4	240	226	360	300	33	275	3.5	4.2	8.5	9.5

DC1


2.2


DC1 variable frequency drives

Dimensions and weights

Size FS4 in IP20

DC1

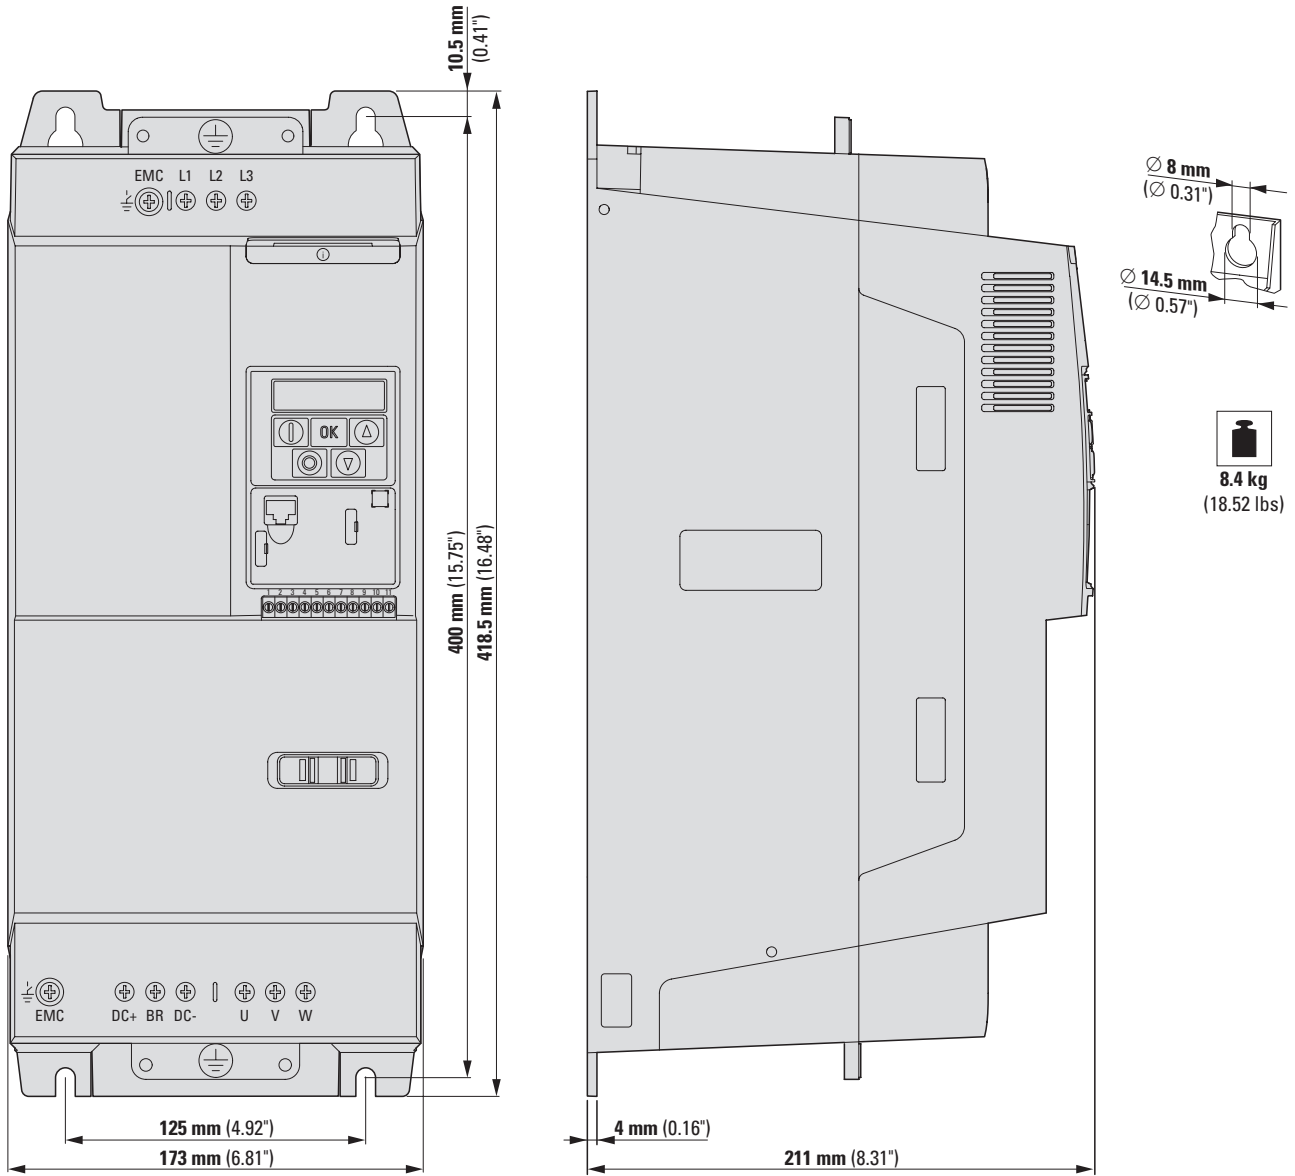

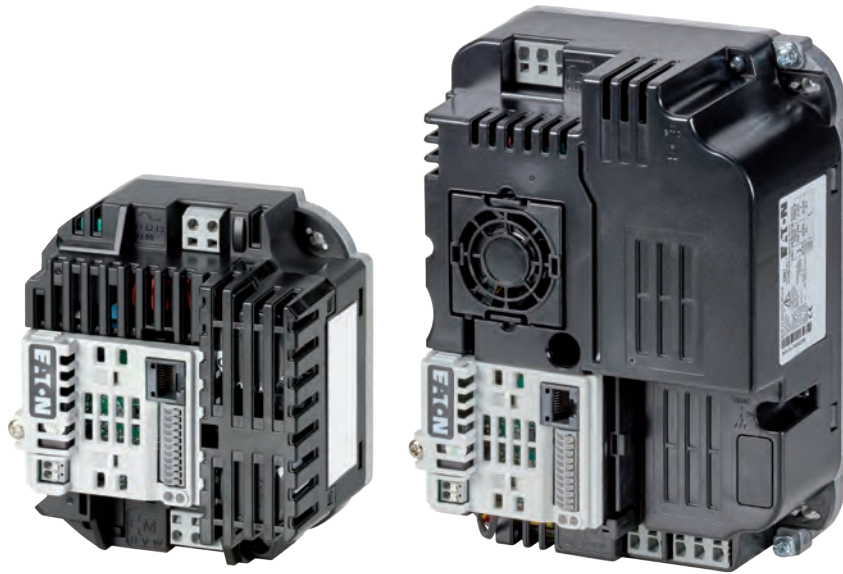

PowerXL DB1 variable frequency drives Cold Plate Drive

PowerXL DB1 variable frequency drives combine all the functionalities from the tried-and-true DC1 series in the smallest possible IEC-compatible format. In addition, cold plate technology makes these powerful devices the ideal

Performance range:

- 0.55 kW (U_e : 1~ 115 V, U_2 : 3~ 230 V)
- 0.75 kW (U_e : 1~ 115-230 V, U_2 : 3~ 230 V)
- 0.37 - 0.75 kW (U_e : 1~ 230 V, U_2 : 3~ 230 V)
- 0.37 - 1.5 kW (U_e : 3~ 230 V, U_2 : 3~ 230 V)
- 0.75 - 4 kW (U_e : 3~ 400 V, U_2 : 3~ 400 V)

Applications:

- Pumps with integrated variable frequency drive
- Fans with integrated variable frequency drive
- Air handling units
- Compressors
- Mobile conveyor belts

solution for customers who need to integrate a variable frequency drive into existing systems without enough space for heat sinks or ventilation.

Features:

- Fast commissioning with 14 basic parameters
- Large overload capability: 150% for 60 seconds, 175% for 2 seconds
- Ambient air temperature up to 60 °C without derating
- Sensorless vector control for all motor types: IE2-, IE3-, IE4-, IE5-motors, Induction motors, Permanent magnet motors, Synchronous reluctance motors, Brushless DC motors
- Short-circuit proof in all operating modes
- Integrated CANopen and Modbus RTU
- IP20 degree of protection
- Integrated EMC filter
- Power Factor Compensation (PFC)
- Integrated Brake Transistor
- Integrated PI controller
- U/f control
- Voltage boost
- DC braking
- Control signal terminals with push-in technology
- International standards (CE, UL, cUL, EAC; RoHS)

Accessory:

- External keypad
- Parameter storage unit and Bluetooth communication stick
- Mains chokes
- Motor chokes
- Sine filter
- Braking resistances
- drivesConnect parameter configuration software
- drivesConnect mobile App (iOS, Android)

For more information, visit:
Eaton.com/db1




2.3 DB1 variable frequency drives up to 4 kW	
System overview	126
Key to type references	127
Sizes and degree of protection	127
Ordering	128
DB1, for three-phase motors 230 V/400 V, IP20	128
Accessories	128
Engineering	130
Block diagram	130
Assigned switching and protective elements for DB1	131
Technical specifications	134
General rated operational data	134
Specific rated operational data	137
Dimensions and weights	143

2.3

DB1 variable frequency drives up to 4 kW

System overview

System overview

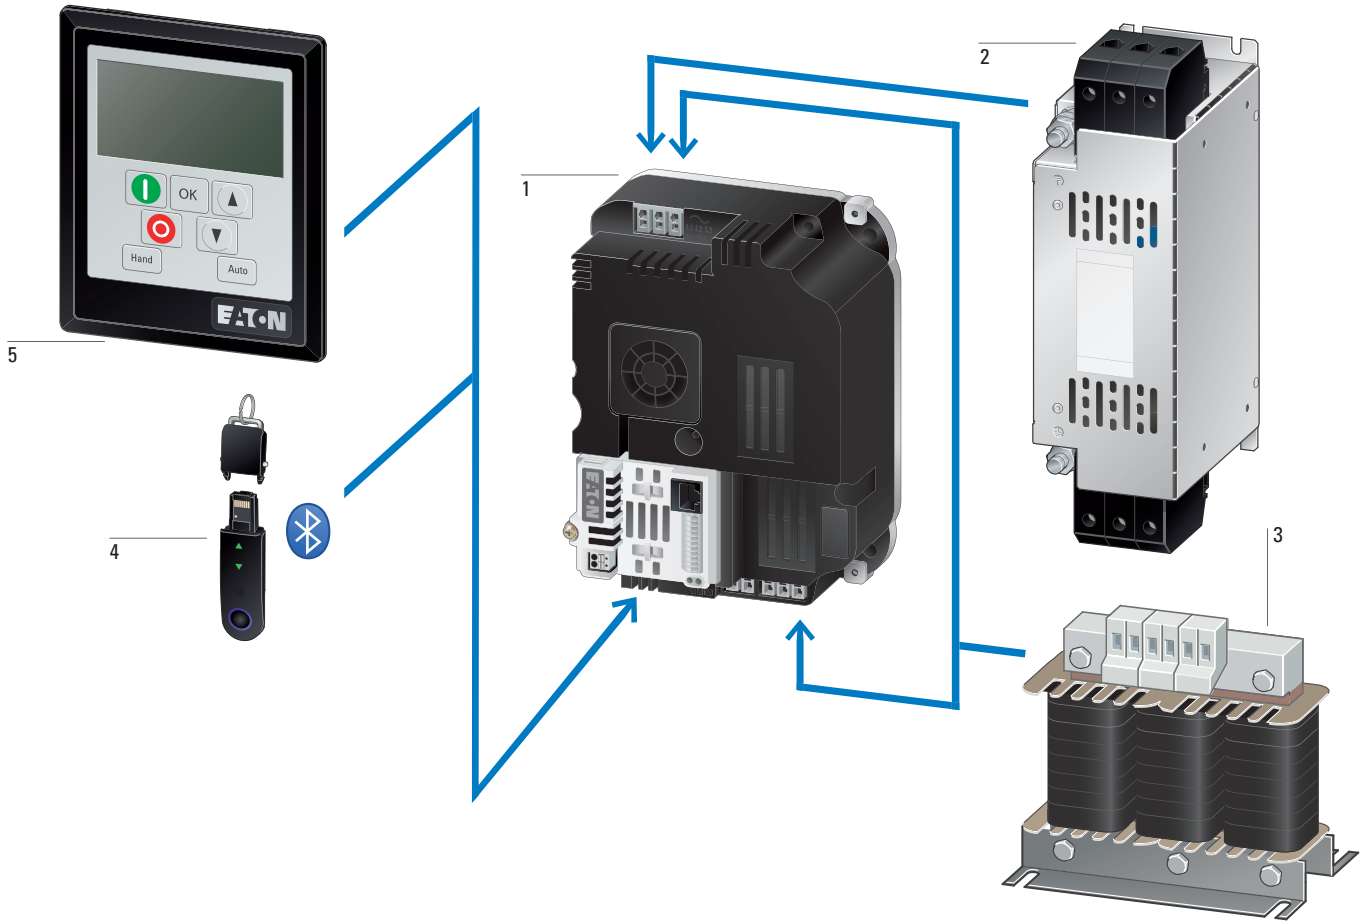

DB1

DB1 variable frequency drives 1
→ Page 128

External radio interference suppression filter (EMC filter) 2
→ Page 256


Mains chokes, motor reactors 3
→ Page 254
→ Page 258

Memory and Bluetooth stick 4
→ Page 129

External keypad 5
→ Page 129

Key to type references, sizes and degree of protection


Key to type references

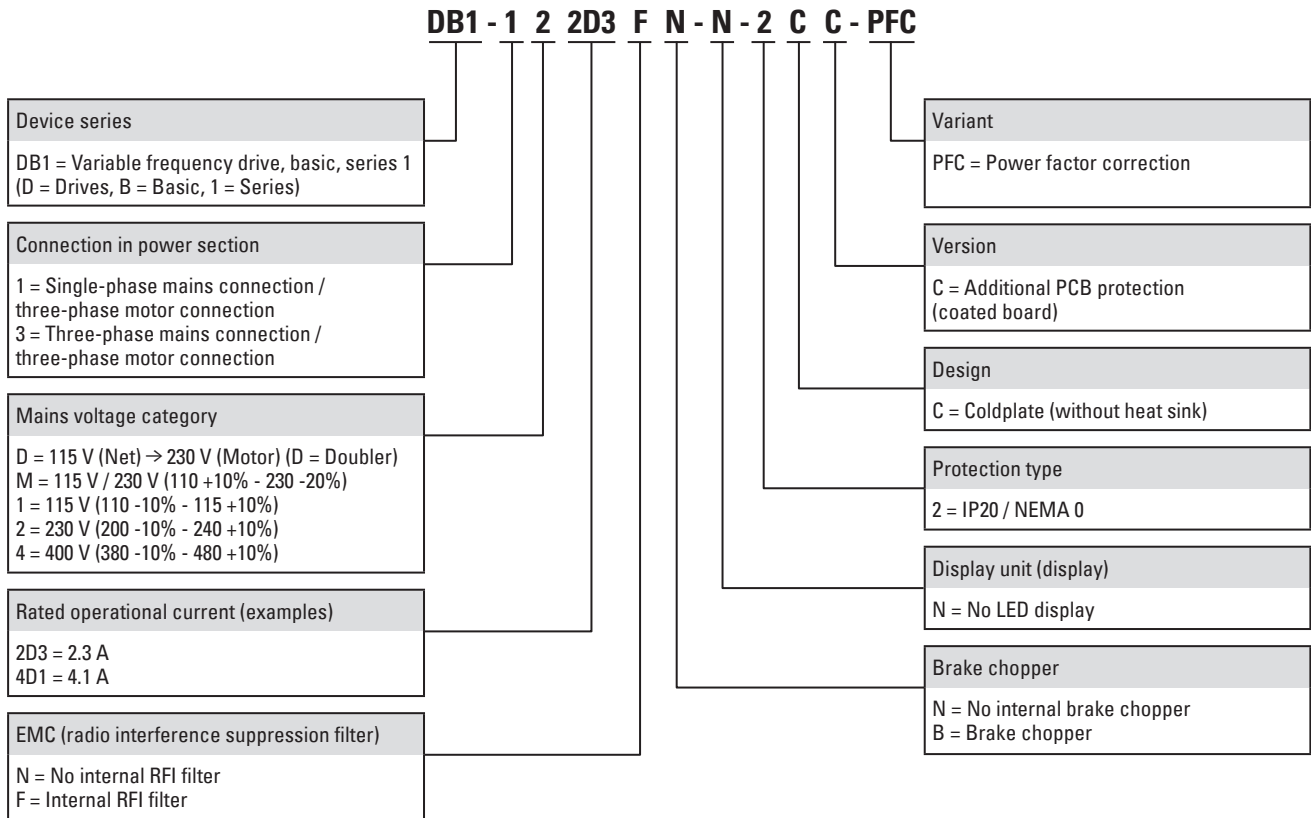

DB1

Sizes and degree of protection

Protection type **Frame size**
IP20/NEMA 0

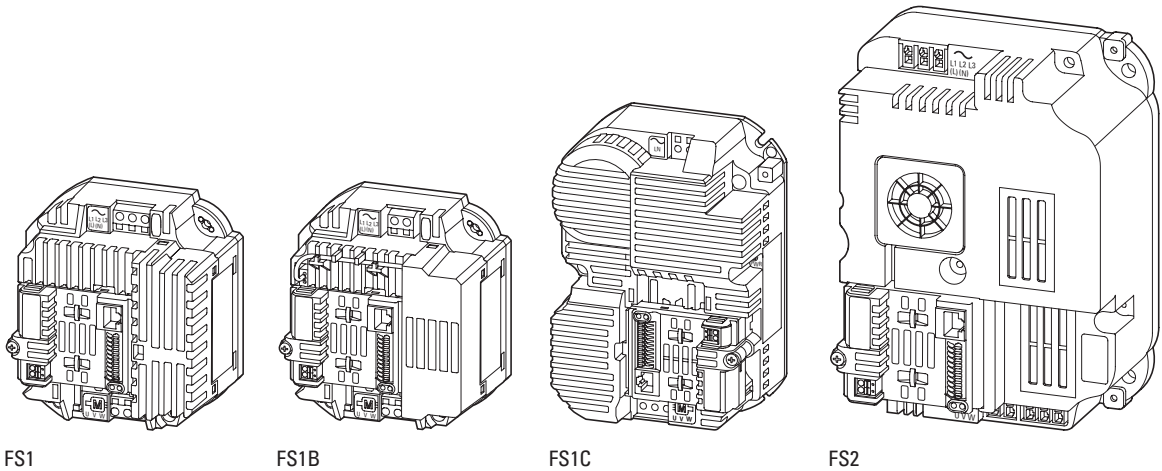

2.3

DB1 variable frequency drives up to 4 kW

DB1, for three-phase motors 230 V/400 V, IP20

Ordering

Rated operational current ¹⁾⁴⁾ I _b A	Assigned motor output ¹⁾²⁾³⁾ P kW P HP		Configuration			Frame size	Protection type	Model code Catalog number	Std. pack
	Radio interference suppression filter	Brake chopper	7-segment display						

PowerXL DB1 variable frequency drives

The mains voltage of 115 V is raised to 230 V (output voltage) through an internal voltage double connection.

U_g 115 V AC, single-phase / U₂ 230 V AC, three-phase

Mains voltage (50/60Hz) U_{LN} 110 (-10%) - 115 (+10%) V

3.2	0.55	0.75	✓	-	-	FS1B	IP20/NEMA 0	DB1-1D3D2FN-N2CC 199347	1 unit
-----	------	------	---	---	---	------	-------------	-----------------------------------	--------

U_g 115 - 230 V AC, single-phase / U₂ 230 V AC, three-phase

Mains voltage (50/60Hz) U_{LN} 200 (-10%) - 240 (+10%) V

4.3	0.75	1	✓	-	-	FS1C	IP20/NEMA 0	DB1-1M4D3FN-N2CC-PFC 199738	1 unit
-----	------	---	---	---	---	------	-------------	---------------------------------------	--------

U_g 230 V AC, single-phase / U₂ 230 V AC, three-phase

Mains voltage (50/60Hz) U_{LN} 200 (-10%) - 240 (+10%) V

2.3	0.37	0.5	✓	-	-	FS1	IP20/NEMA 0	DB1-122D3FN-N2CC 197193	1 unit
-----	------	-----	---	---	---	-----	-------------	-----------------------------------	--------

4.3	0.75	1	✓	-	-	FS1	IP20/NEMA 0	DB1-124D3FN-N2CC 197194	
-----	------	---	---	---	---	-----	-------------	-----------------------------------	--

7	1.5	2	✓	-	-	FS1C	IP20/NEMA 0	DB1-127D0FN-N2CC-PFC 199739	
---	-----	---	---	---	---	------	-------------	---------------------------------------	--

U_g 230 V AC, three-phase / U₂ 230 V AC, three-phase

Mains voltage (50/60Hz) U_{LN} 200 (-10%) - 240 (+10%) V

2.3	0.37	0.5	✓	-	-	FS1	IP20/NEMA 0	DB1-322D3FN-N2CC 199735	1 unit
-----	------	-----	---	---	---	-----	-------------	-----------------------------------	--------

4.3	0.75	1	✓	-	-	FS1	IP20/NEMA 0	DB1-324D3FN-N2CC 199736	
-----	------	---	---	---	---	-----	-------------	-----------------------------------	--

7	1.5	2	✓	-	-	FS1B	IP20/NEMA 0	DB1-327D0FN-N2CC 199737	
---	-----	---	---	---	---	------	-------------	-----------------------------------	--

U_g 400 V AC, three-phase / U₂ 400 V AC, three-phase

Mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V

2.2	0.75	1	✓	-	-	FS1	IP20/NEMA 0	DB1-342D2FN-N2CC 197196	1 unit
-----	------	---	---	---	---	-----	-------------	-----------------------------------	--------

4.1	1.5	2	✓	-	-	FS1	IP20/NEMA 0	DB1-344D1FN-N2CC 197197	
-----	-----	---	---	---	---	-----	-------------	-----------------------------------	--

5.8	2.2	3	✓	✓	-	FS2	IP20/NEMA 0	DB1-345D8FB-N2CC 197565	
-----	-----	---	---	---	---	-----	-------------	-----------------------------------	--

9.5	4	5	✓	✓	-	FS2	IP20/NEMA 0	DB1-349D5FB-N2CC 197566	
-----	---	---	---	---	---	-----	-------------	-----------------------------------	--

Notes







¹⁾ Overload cycle: 150% for 60 s every 600 s

²⁾ At 230 V, 50 Hz/at 220 - 240 V, 60 Hz

At 400 V, 50 Hz/at 440 - 480 V, 60 Hz

³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

⁴⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +60 °C

	Description	Length m	For use with	Model code Catalog number	Std. pack
	External keypad				
	With 7-digital display assembly Front IP54 With approx. 3 m-long, plug-in connection cable (RJ45, 8-pin)	3	DE1, DE11, DC1, DB1, DA1	DX-KEY-LED2 186946	1 unit
	With multi-language plain text OLED display Front IP54 With approx. 3 m-long, plug-in connection cable (RJ45, 8-pin)	3	DC1, DB1, DA1, RAM05, RASP5	DX-KEY-OLED 169133	
	Parameter assignment				
	Parameter storage unit and Bluetooth communication stick For storage, copying parameters, and/or transferring parameters to a PC or smartphone (iOS or Android) via Bluetooth with the drivesConnect software or the drivesConnect mobile app respectively With 2 function keys for uploading and downloading parameters with parameter memory.	–	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-COM-STICK3 197585	1 unit
	Programming cable				
	Interface converter USB/RS485 with connection cable, RJ45 8 pole For storage, copying parameters, and/or transferring parameters to a PC with the drivesConnect software, electrically isolated	3	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-CBL-PC-3M0 744-A3036-00P	1 unit
	Connection cable				
	Patch cord with RJ45 plugs, 8 pole	0.5	DE1, DE11, DC1, DB1, DA1	DX-CBL-RJ45-0M5 169137	1 unit
		1		DX-CBL-RJ45-1M0 169138	
		3		DX-CBL-RJ45-3M0 169139	
	Bus terminating resistor				
	RJ45 8 pole Connection to CANopen (pin 1/2, 124 Ω) or to Modbus RTU (pin 7/8, 120 Ω)	–	DX-SPL-RJ45-2SL-1PL	EASY-NT-R 256281	2 units
	Splitter				
	RJ45, 8-pin, 3 sockets	–	DX-CBL-RJ45...	DX-SPL-RJ45-3SL 169141	1 unit
	RJ45, 8-pin, 2 sockets/1 plug	–	DE1, DE11, DC1, DB1, DA1	DX-SPL-RJ45-2SL1PL 169142	

DB1

2.3

DB1 variable frequency drives up to 4 kW

Block diagram


Engineering

DB1-12...

Variable frequency drive with single-phase supply system voltage and three-phase motor connection

Mains voltage U_{LN} : single-phase, 200 (-10%) - 240 (+10%) V, 50/60 Hz

Motor voltage U_2 : three-phase, $U_2 = U_{LN}$, 0 - 50/60 Hz (max. 500 Hz)

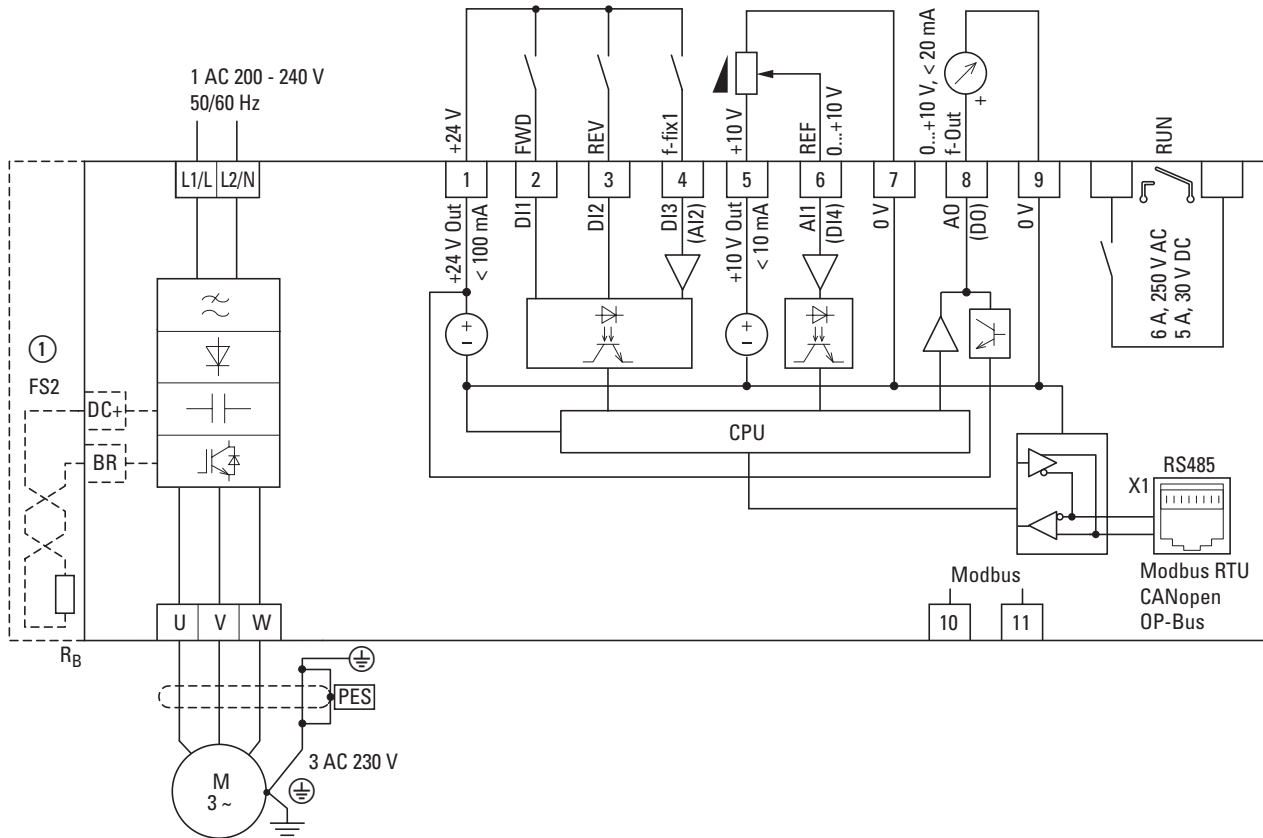


DB1

DB1-34...

Variable frequency drive with three-phase mains supply voltage and three-phase motor connection

Mains voltage U_{LN} : three-phase, 380 (-10%) - 480 (+10%) V, 50/60 Hz

Motor voltage U_2 : three-phase, $U_2 = U_{LN}$, 0 - 50/60 Hz (max. 500 Hz)

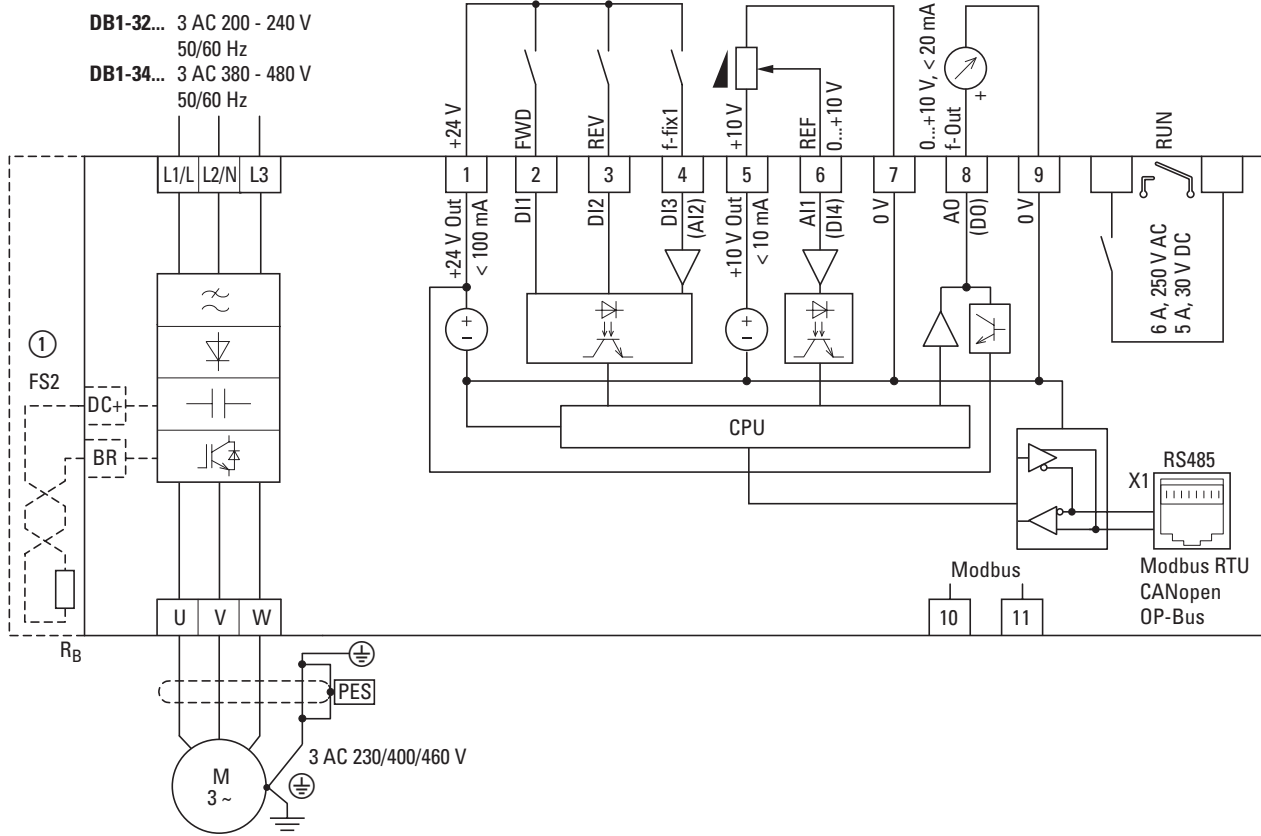

① FS2-size devices make it possible to connect braking resistors (DC+, BR).

2.3

DB1 variable frequency drives up to 4 kW

Assigned switching and protective elements for DB1

Model code	power rating 150 % kW	input current 150 % A	output current 150 % A	MCCB Type 1 coordination @ 150 %	Fuse Type 1 coordination @ 150 %	minimum braking resistance	recommended braking resistance	brake resistor, 10 % duty cycle @ 150 %	brake resistor, 20 % duty cycle @ 150 %	brake resistor, 40 % duty cycle @ 150 %
DB1-122D3FN-N2CC	0.37	4.5	2.3	PKZMO-10	C10G10	-	-	-	-	-
DB1-124D3FN-N2CC	0.75	9.1	4.3	PKZMO-16	C10G16	-	-	-	-	-
DB1-127D0FN-N2CC-PFC	0.75	8.7	7.0	PKZMO-16	C10G16	-	-	-	-	-
DB1-1D3D2FN-N2CC	0.5	11.4	3.2	PKZMO-16	C10G16	-	-	-	-	-
DB1-1M4D3FN-N2CC-PFC	(at 110 V) 0.75	10.9	4.3	PKZMO-16	C10G16	-	-	-	-	-
DB1-1M4D3FN-N2CC-PFC	(at 230 V) 0.75	5.1	4.3	PKZMO-10	C10G10	-	-	-	-	-
DB1-322D3FN-N2CC	0.37	2.2	2.3	PKZMO-10	C10G10	-	-	-	-	-
DB1-324D3FN-N2CC	0.75	4.4	4.3	PKZMO-10	C10G10	-	-	-	-	-
DB1-327D0FN-N2CC	1.5	9.6	7.0	PKZMO-16	C10G16	-	-	-	-	-
DB1-342D2FN-N2CC	0.75	2.3	2.2	PKZMO-6,3	C10G8	-	-	-	-	-
DB1-344D1FN-N2CC	1.5	5.6	4.1	PKZMO-10	C10G10	-	-	-	-	-
DB1-345D8FB-N2CC	2.2	7.5	5.8	PKZMO-10	C10G10	100	175	DX-BR150-800	DX-BR150-1K1	DX-BR100-1K6
DB1-349D5FB-N2CC	4	10.7	9.5	PKZMO-16	C10G16	100	100	DX-BR100-1K1	DX-BR100-1K6	R: 2 x DX-BR047-3K1

DB1 variable frequency drives up to 4 kW

2.3

Assigned switching and protective elements for DB1

RCD type @ 150%	optional mains contactor @150%	External EMC filter @ 150%	External EMC filter (low leakage current) @ 150%	Mains choke @ 150%	uk	passive harmonic filter @ 150%	Motor choke @ 150%	Sine filter @ 150%	All-pole sine filter @ 150%
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-008	DX-EMC12-008-SL	DX-LN1-009	4 %	-	DX-LM3-008	DX-SIN3-004	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-012	DX-EMC12-012-SL	DX-LN1-018	4 %	-	DX-LM3-008	DX-SIN3-010	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-012	DX-EMC12-012-SL	DX-LN1-013	4 %	-	DX-LM3-008	DX-SIN3-010	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-012	DX-EMC12-012-SL	DX-LN1-018	4 %	-	DX-LM3-008	DX-SIN3-004	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-012	DX-EMC12-012-SL	DX-LN1-018	4 %	-	DX-LM3-008	DX-SIN3-010	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-008	DX-EMC12-008-SL	DX-LN1-009	4 %	-	DX-LM3-008	DX-SIN3-010	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-004	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-004	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-010	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016-L	DX-LN3-016	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-004	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-004	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-010	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-016	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016-L	DX-LN3-016	4 %	DX-PHF34-019	DX-LM3-011	DX-SIN3-010	DX-SIN3-013-A

Technical specifications

	Symbol	Unit	Value
General			
Standards			General requirements: EN 61800-2 EMV: EN 61800-3: Safety: EN 61800-5-1
Certifications and manufacturer's declarations on conformity			CE, UL, cUL
Production quality			RoHS, ISO 9001
Climatic proofing	pw	%	< 95%, average relative humidity (RH), non-condensing, non-corrosive, no dripping water (EN 61800-2)
Ambient temperature			
Operation	θ	°C	-10 - +60 (depending on the cooling system)
Storage	θ	°C	-40 - +60 (frost-free and condensation-free)
Vibration level (not evaluated during operation)			
Shock test			
Pulse shape			Half sinus
Top acceleration		g	15
Time window		ms	11
Vibration test			
Frequency range	f	Hz	10 - 150 10 - 57.55: 0.075 mm peak-peak 57.55 - 150: 1 g Top acceleration
Vibration evaluation			
Electrostatic discharge (ESD, EN 61000-4-2:2009)	U	kV	±4, contact discharge ±8, air discharge
Fast transient burst (EFT/B, EN 61000-4-4: 2004)	U	kV	±1, at 5 kHz, control signal terminal ±2, at 5 kHz, motor connection terminals, single-phase mains connection terminals ±2, at 5 kHz, three-phase mains connection terminals
Overvoltage (surge, EN 61000-4-5: 2006)			
115 V			±1, phase to phase/neutral conductor ±2, phase/neutral conductor to earth
(200 - 240) V			±1, phase to phase/neutral conductor ±2, phase/neutral conductor to earth
(380 - 480) V			±2, phase to phase ±2, phase to earth ±4, Fail Safe
Electric strength (flash, EN 61800-5-1: 2007)			
(110 - 115) V	U	kV	1.5
(200 - 240) V	U	kV	1.5
(380 - 480) V	U	kV	2.5
Radio interference class (EMC)			
Maximum screened motor cable length with integrated radio interference suppression filter			
Category C1 (conducted)	l	m	1
Category C2	l	m	3
Category C3	l	m	10
Mounting position			
Altitude	h	m	Any – depends on the cooling system 0 - 1000 above sea level, > 1000 with 1% load current reduction every 100 m, max. 2000
Protection type			
Protection against contact			IP20 (NEMA 0) BGV A3 (VBG4, finger- and back-of-hand proof)

	Symbol	Unit	Value
Main circuit / power section			
Feeder			
Rated operating voltage			
DB1-12...	U_e	V	1~ 230 (200 V (-10%) - 240 V (+10%))
DB1-1D...	U_e	V	1~ 110 (110 V (-10%) - 115 V (+10%)) → $U_2 = 230$ V
DB1-1M...	U_e	V	1~ 110 - 230 (110 V (-20%) - 230 V (+10%)) → $U_2 = 230$ V
DB1-32...	U_e	V	3~ 230 (200 V (-10%) - 240 V (+10%))
DB1-34...	U_e	V	3~ 400 (380 V (-10%) - 480 V (+10%))
Mains frequency	f	Hz	48 - 62
Phase imbalance		%	max. 3
Maximum short-circuit current (supply voltage)	SCCR	kA	100
Mains switch-on frequency			Maximum of one time every 30 seconds
Mains network configuration (AC supply system)			TN and TT network with directly earthed neutral point.
Inrush current	I	A	$< I_{LN}$
Motor feeder			
Output voltage	U_2	V	3~ 0 - U_e
Assigned motor output			
at 115 V, 50 Hz	P	kW	0.5
at 230 V, 50 Hz	P	kW	0.37 - 1.5
at 400 V, 50 Hz	P	kW	0.75 - 4
Output frequency			
Range, parameterizable	f_2	Hz	0 - 5 x Rated motor frequency (P-09), max. 500 Hz
Resolution		Hz	0.1
Rated current	I_e	A	2.2 - 9.5
Overload current for 60 s every 600 s	I_L	%	150
Overload current for 3.75 s every 600 s	I_L	%	175
Switching frequency (double modulation)	f_{PWM}	kHz	max. 32
Operating mode			
V/Hz control (speed accuracy)			±20%, with slip compensation
Vector control (static speed accuracy)			±1% load range: 0 - 100%
Torque response time	t_r	ms	1 - 8
Torque linearity			±5% (10 - 90% of speed variable range, 20 - 100% of torque load range)
Response time (enable IGBT)	t_r	ms	< 10
DC-braking			
Time before start	t	s	0 - 25, in the event of a stop
Motor pick-up control function (for catching spinning motors)			all frame sizes

2.3

DB1 variable frequency drives up to 4 kW

General rated operational data

	Symbol	Unit	Value
Control section			
Control voltage			
Output voltage (control signal terminal 1)	U_c	V DC	24
Load rating (control signal terminal 1)	I_1	mA	100
Reference voltage (control signal terminal 5)	U_s	V DC	10
Load rating (control signal terminal 5)	I_s	mA	10
Digital Input (DI)			
Qty.			2 - 4
Logic (level)			increase (NPN)
Time of reaction	t_r	ms	< 8
Input voltage range High (1)	U_c	V DC	8 - 30
Input voltage range Low (0)	U_c	V DC	0 - 4
Analog input (AI)			
Qty.			0 - 2
Resolution		Bit	12
Accuracy		%	< 1 to the final value
Time of reaction	t_r	ms	< 16
Input voltage range	U_s	V	0 - 10, DC ($R_i > 100 \text{ k}\Omega$)
Input current range	I_s	mA	0/4 - 20 ($R_B \sim 500 \Omega$)
Relay output (RO1)			
Qty.			1 relays
Relay contact			Make
Switching capacity			
AC	I	A	6 (250 V AC)
DC	I	A	5 (30 V AC)
Digital output (DO)			
Qty.			0 - 1
Output voltage	U_{out}	V	+24
Load rating (control signal terminal 8)	I_g	mA	max. 20
Analog output (AO)			
Qty.			0 - 1
Output voltage (control signal terminal 8)	U_{out}	V	0 - 10
Output current (control signal terminal 8)	I_g	mA	0 - 20, 4 - 20
Load rating (control signal terminal 8)	I_g	mA	max. 20
Resolution		Bit	10
Accuracy		%	< 1 to the final value
Interface (RJ45)			
			OP bus, Modbus RTU, CANopen, RS485
Response time (after valid command)	t_r	ms	< 8 (Modbus, CANopen) < 8 (OP bus: Master slave, 60 ms cycle)

Size	Symbol	Unit	3D2
DB1-1D... device series			
Rated operational current	I_e	A	3.2
Overload current for 60 s every 600 s	I_L	A	4.8
Overload current for 3.75 s every 600 s	I_L	A	5.6
Apparent power at rated operation 230 V	S	kVA	0.74
Apparent power at rated operation 240 V	S	kVA	0.77
Assigned motor power			
at 230 V, 50 Hz	P	kW	0.5
at (220 - 240) V, 60 Hz	P	HP	0.75
Power side (primary side):			
Number of phases			single-phase or two-phase
Device voltage rating	U_{LN}	V	110 (-10%) - 115 (+10%), 48 - 62 Hz 99 - 126 ±0%
Input current (phase current)	I_{LN}	A	11.4
Switching frequency (pulse frequency)			
Default settings	f_{PWM}	kHz	8
Setting range	f_{PWM}	kHz	4 - 32
Maximum leakage current to earth (PE), at U_{LN} : 240 V, without motor	I_{Touch}	mA	< 3.5
Heat dissipation (% n_N / % M_N)			
90 / 100 @ 4 kHz	PV	W	33
90 / 100 @ 8 kHz	PV	W	36
90 / 100 @ 12 kHz	PV	W	23
90 / 100 @ 16 kHz	PV	W	24
90 / 100 @ 24 kHz	PV	W	35
90 / 100 @ 32 kHz	PV	W	42
90 / 50 @ 8 kHz	PV	W	34
50 / 100 @ 8 kHz	PV	W	37
50 / 50 @ 8 kHz	PV	W	25
50 / 25 @ 8 kHz	PV	W	20
0 / 100 @ 8 kHz	PV	W	52
0 / 50 @ 8 kHz	PV	W	17
0 / 25 @ 8 kHz	PV	W	16
Standby, (device not enabled)	PV	W	5
Frame size	-	-	FS1B

Note N/A = no entry

2.3

DB1 variable frequency drives up to 4 kW

Specific rated operational data

Size	Symbol	Unit	4D3
DB1-1M... device series			
Rated operational current	I_e	A	4.3
Overload current for 60 s every 600 s	I_L	A	6.5
Overload current for 3.75 s every 600 s	I_l	A	7.5
Apparent power at rated operation 230 V	S	kVA	0.99
Apparent power at rated operation 240 V	S	kVA	1
Assigned motor power			
at 230 V, 50 Hz	P	kW	0.75
at (220 - 240) V, 60 Hz	P	HP	1
Power side (primary side):			
Number of phases			single-phase or two-phase
Device voltage rating	U_{LN}	V	110 (-20%) - 230 (+10%), 48 - 62 Hz 88 - 253 ±0%
Input current (phase current)	I_{LN}	A	110 V: 10.92 230 V: 5.1
Switching frequency (pulse frequency)			
Default settings	f_{PWM}	kHz	8
Setting range	f_{PWM}	kHz	4 - 32
Maximum leakage current to earth (PE), at U_{LN} : 240 V, without motor	I_{Touch}	mA	< 3.5
Heat dissipation (% n_N / % M_N)			
90 / 100 @ 4 kHz	PV	W	N/A
90 / 100 @ 8 kHz	PV	W	N/A
90 / 100 @ 12 kHz	PV	W	N/A
90 / 100 @ 16 kHz	PV	W	N/A
90 / 100 @ 24 kHz	PV	W	N/A
90 / 100 @ 32 kHz	PV	W	N/A
90 / 50 @ 8 kHz	PV	W	N/A
50 / 100 @ 8 kHz	PV	W	N/A
50 / 50 @ 8 kHz	PV	W	N/A
50 / 25 @ 8 kHz	PV	W	N/A
0 / 100 @ 8 kHz	PV	W	N/A
0 / 50 @ 8 kHz	PV	W	N/A
0 / 25 @ 8 kHz	PV	W	N/A
Standby, (device not enabled)	PV	W	6.5
Frame size	–	–	FS1C

Note N/A = no entry

Size	Symbol	Unit	7D0
DB1-12...-PFC device series			
Rated operational current	I_e	A	7
Overload current for 60 s every 600 s	I_L	A	10.5
Overload current for 3.75 s every 600 s	I_L	A	12.25
Apparent power at rated operation 230 V	S	kVA	1.6
Apparent power at rated operation 240 V	S	kVA	1.7
Assigned motor power			
at 230 V, 50 Hz	P	kW	1.5
at (220 - 240) V, 60 Hz	P	HP	2
Power side (primary side):			
Number of phases			single-phase or two-phase
Device voltage rating	U_{LN}	V	200 (-10%) - 240 (+10%), 50/60 Hz 180 - 264 ±0%, 48 - 62 Hz ±0%
Input current (phase current)	I_{LN}	A	8.7
Switching frequency (pulse frequency)			
Default settings	f_{PWM}	kHz	8
Setting range	f_{PWM}	kHz	4 - 32
Maximum leakage current to earth (PE), at U_{LN} : 240 V, without motor	I_{Touch}	mA	< 3.5
Heat dissipation (% n_N / % M_N)			
90 / 100 @ 4 kHz	PV	W	N/A
90 / 100 @ 8 kHz	PV	W	105
90 / 100 @ 12 kHz	PV	W	N/A
90 / 100 @ 16 kHz	PV	W	N/A
90 / 100 @ 24 kHz	PV	W	N/A
90 / 100 @ 32 kHz	PV	W	N/A
90 / 50 @ 8 kHz	PV	W	63
50 / 100 @ 8 kHz	PV	W	80
50 / 50 @ 8 kHz	PV	W	52
50 / 25 @ 8 kHz	PV	W	33
0 / 100 @ 8 kHz	PV	W	N/A
0 / 50 @ 8 kHz	PV	W	41
0 / 25 @ 8 kHz	PV	W	33
Standby, (device not enabled)	PV	W	N/A
Frame size	-	-	FS1C

Note N/A = no entry

2.3

DB1 variable frequency drives up to 4 kW

Specific rated operational data

Size	Symbol	Unit	2D3	4D3
DB1-12... device series				
Rated operational current	I_e	A	2.3	4.3
Overload current for 60 s every 600 s	I_L	A	3.45	6.45
Overload current for 3.75 s every 600 s	I_L	A	4.03	7.53
Apparent power at rated operation 230 V	S	kVA	0.53	0.99
Apparent power at rated operation 240 V	S	kVA	0.55	1.03
Assigned motor power				
at 230 V, 50 Hz	P	kW	0.37	0.75
at (220 - 240) V, 60 Hz	P	HP	0.5	1
Power side (primary side):				
Number of phases			single-phase or two-phase	
Device voltage rating	U_{LN}	V	200 (-10%) - 240 (+10%), 50/60 Hz 180 - 264 \pm 0%, 48 - 62 Hz \pm 0%	
Input current (phase current)	I_{LN}	A	4.5	9.1
Switching frequency (pulse frequency)				
Default settings	f_{PWM}	kHz	8	8
Setting range	f_{PWM}	kHz	4 - 32	4 - 32
Maximum leakage current to earth (PE), at U_{LN} : 240 V, without motor	I_{Touch}	mA	< 3.5	< 3.5
Heat dissipation (% n_N / % M_N)				
90 / 100 @ 4 kHz	PV	W	N/A	57
90 / 100 @ 8 kHz	PV	W	34	60
90 / 100 @ 12 kHz	PV	W	N/A	47
90 / 100 @ 16 kHz	PV	W	N/A	59
90 / 100 @ 24 kHz	PV	W	N/A	59
90 / 100 @ 32 kHz	PV	W	N/A	60
90 / 50 @ 8 kHz	PV	W	29	32
50 / 100 @ 8 kHz	PV	W	28	41
50 / 50 @ 8 kHz	PV	W	25	23
50 / 25 @ 8 kHz	PV	W	23	18
0 / 100 @ 8 kHz	PV	W	23	27
0 / 50 @ 8 kHz	PV	W	22	18
0 / 25 @ 8 kHz	PV	W	21	13
Standby, (device not enabled)	PV	W	4.3	4.3
Frame size	-	-	FS1	FS1

Note N/A = no entry

DB1 variable frequency drives up to 4 kW

2.3

Specific rated operational data

Size	Symbol	Unit	2D3	4D3	7D0
DB1-32... device series					
Rated operational current	I_e	A	2.3	4.3	7
Overload current for 60 s every 600 s	I_L	A	3.45	6.45	10.5
Overload current for 3.75 s every 600 s	I_L	A	4	7.5	12.3
Apparent power at rated operation 230 V	S	kVA	0.53	0.99	1.6
Apparent power at rated operation 240 V	S	kVA	0.55	1	1.7
Assigned motor power					
at 230 V, 50 Hz	P	kW	0.37	0.75	1.5
at (220 - 240) V, 60 Hz	P	HP	0.5	1	2
Power side (primary side):					
Number of phases			single-phase or two-phase		
Device voltage rating	U_{LN}	V	200 (-10%) - 240 (+10%), 50/60 Hz 180 - 264 \pm 0%, 48 - 62 Hz \pm 0%		
Input current (phase current)	I_{LN}	A	2.2	4.4	9.6
Switching frequency (pulse frequency)					
Default settings	f_{PWM}	kHz	8	8	8
Setting range	f_{PWM}	kHz	4 - 32	4 - 32	4 - 32
Maximum leakage current to earth (PE), at U_{LN} : 240 V, without motor	I_{Touch}	mA	< 3.5	< 3.5	< 3.5
Heat dissipation (% n_N / % M_N)					
90 / 100 @ 4 kHz	PV	W	N/A	N/A	N/A
90 / 100 @ 8 kHz	PV	W	29	51	89
90 / 100 @ 12 kHz	PV	W	N/A	N/A	N/A
90 / 100 @ 16 kHz	PV	W	N/A	N/A	N/A
90 / 100 @ 24 kHz	PV	W	N/A	N/A	N/A
90 / 100 @ 32 kHz	PV	W	N/A	N/A	N/A
90 / 50 @ 8 kHz	PV	W	20	33	58
50 / 100 @ 8 kHz	PV	W	28	45	78
50 / 50 @ 8 kHz	PV	W	24	32	52
50 / 25 @ 8 kHz	PV	W	23	28	41
0 / 100 @ 8 kHz	PV	W	24	41	N/A
0 / 50 @ 8 kHz	PV	W	21	30	45
0 / 25 @ 8 kHz	PV	W	21	26	37
Standby, (device not enabled)	PV	W	4.2	4	4.9
Frame size	-	-	FS1	FS1	FS1B

Note N/A = no entry

2.3

DB1 variable frequency drives up to 4 kW


Specific rated operational data

Size	Symbol	Unit	2D2	4D1	5D8	9D5
DB1-34... device series						
Rated operational current	I_e	A	2.2	4.1	5.8	9.5
Overload current for 60 s every 600 s	I_L	A	3.3	6.15	8.7	14.25
Overload current for 3.75 s every 600 s	I_L	A	3.85	7.18	10.15	16.63
Apparent power at rated operation 400 V	S	kVA	0.88	1.64	2.32	3.8
Apparent power at rated operation 480 V	S	kVA	1.06	1.97	2.78	4.56
Assigned motor power						
at 400 V, 50 Hz	P	kW	0.75	1.5	2.2	4
at 480 V, 60 Hz	P	HP	1	2	3	8
Power side (primary side):						
Number of phases			3	3	3	3
Device voltage rating	U_{LN}	V	380 (-10%) - 480 (+10%), 50/60 Hz 342 - 528 $\pm 0\%$, (48 - 62) Hz $\pm 0\%$			
Input current (phase current)	I_{LN}	A	2.3	5.6	7.5	10.7
Switching frequency (pulse frequency)						
Default settings	f_{PWM}	kHz	8	8	8	8
Setting range	f_{PWM}	kHz	4 - 32	4 - 32	4 - 32	4 - 32
Maximum leakage current (contact current) to earth (PE), at U_{LN} : 400 V, without motor	I_{Touch}	mA	< 3.5	< 3.5	< 3.5	< 3.5
Heat dissipation (% n_N / % M_N)						
90 / 100 @ 4 kHz	PV	W	N/A	46	75	128
90 / 100 @ 8 kHz	PV	W	N/A	53	82	148
90 / 100 @ 12 kHz	PV	W	N/A	63	99	169
90 / 100 @ 16 kHz	PV	W	N/A	59	115	191
90 / 100 @ 24 kHz	PV	W	N/A	69	143	244
90 / 100 @ 32 kHz	PV	W	N/A	80	–	–
90 / 50 @ 8 kHz	PV	W	N/A	36	62	94
50 / 100 @ 8 kHz	PV	W	N/A	50	72	126
50 / 50 @ 8 kHz	PV	W	N/A	35	55	84
50 / 25 @ 8 kHz	PV	W	N/A	29	45	67
0 / 100 @ 8 kHz	PV	W	N/A		62	108
0 / 50 @ 8 kHz	PV	W	N/A	30	54	75
0 / 25 @ 8 kHz	PV	W	N/A	27	40	61
Standby, (device not enabled)	PV	W	4.6	4.6	7.4	7.4
Frame size			FS1	FS1	FS2	FS2


Note N/A = no entry

Dimensions and weights


FS1

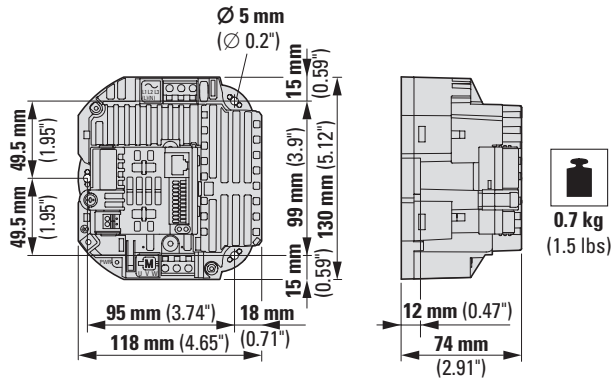


FS1B

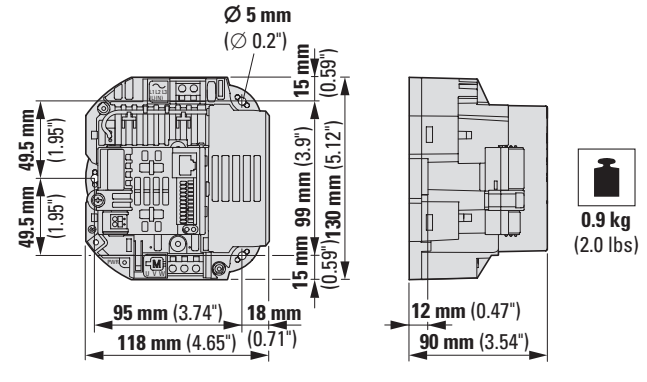

FS1C

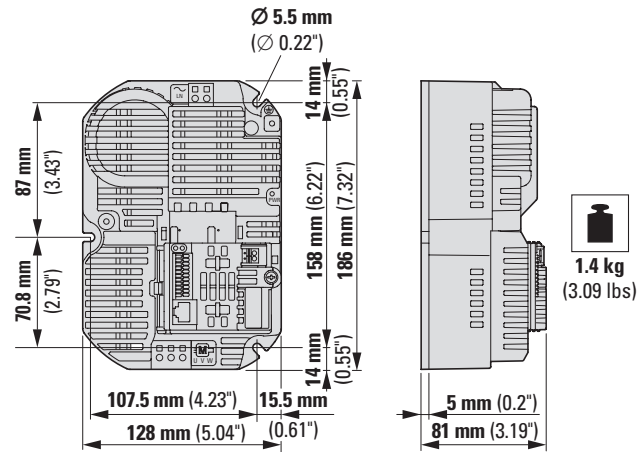

FS2

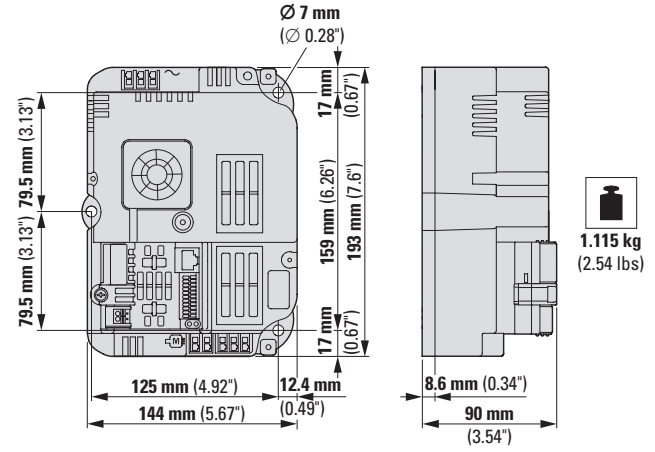

DB1



PowerXL DA1 variable frequency drives

Advanced Machinery Drive

The PowerXL DA1 variable frequency drive, designed for the machine and system building industry, is characterized by its enormous flexibility in terms of communications protocols, a function block editor (PLC) that makes it

possible to configure the drive as necessary for specific applications, and a powerful vector control mode for highly dynamic applications.

Performance range:

- 0.75 - 2.2 kW (U_e : 1~ 230 V, U_2 : 3~ 230 V)
- 0.75 - 75 kW (U_e : 3~ 230 V, U_2 : 3~ 230 V)
- 0.75 - 160 kW (U_e : 3~ 400 V, U_2 : 3~ 400 V)
- 0.75 - 110 kW (U_e : 3~ 575 V, U_2 : 3~ 575 V)

Applications:

- Winding machines
- Respooler machines
- Coating systems
- Compressors
- Mills, roller mills, shredders
- Extruders
- Cranes and lifting systems
- Marine
- Distributed applications (IP66)

Features:

- Large overload capability: 150% for 60 seconds, 200% for 4 seconds.
- Integrated Modbus RTU and CANopen
- Ambient air temperature up to 50 °C without derating
- Integrated EMC filter
- Integrated Brake Transistor
- Degrees of protection IP20/55 and IP66
- Various I/O expansions
- V/F control, vector SL and CL, PM motor, BLDC motor, SynRel motor
- Optional field bus connections
- Integrated function block editor, optional
- Safe Torque Off (STO, IP20/55: SIL 2/Pl d, IP66: SIL 3/Pl e)
- Optional high-resolution OLED display
- International standards (CE, UL, cUL, RCM, RoHS, EAC, UkrSEPRO, DNV (754–757))

Accessory:

- Communication modules (PROFIBUS, PROFINET, Ethernet/IP, EtherCAT, SmartWire-DT, Modbus TCP, BACnet/IP...)
- I/O expansions
- Encoder module
- External keypad
- Mains chokes
- Motor chokes
- Sine filter
- Braking resistances
- External EMC filter
- Parameter storage unit and Bluetooth communication stick
- drivesConnect parameter configuration software
- drivesConnect mobile App (iOS, Android)

For more information, visit:
Eaton.com/da1



2.4 DA1 variable frequency drives up to 160 kW


System overview	146
Key to type references	147
Sizes and degree of protection	148
Ordering	149
DA1 for three-phase motors 230 V, IP20/IP55	149
DA1 for three-phase motors 400 V, IP20/IP55	150
DA1 for three-phase motors 500 V, IP20/IP55	151
DA1 for three-phase motors 230 V, IP66	152
DA1 for three-phase motors 400 V/500 V, IP66	153
Accessories	155
Engineering	157
Block diagram	157
Assigned switching and protective elements for DA1	160
Technical specifications	162
General rated operational data	162
Specific rated operational data	165
Dimensions and weights	170

2.4

DA1 variable frequency drives up to 160 kW

System overview

System overview

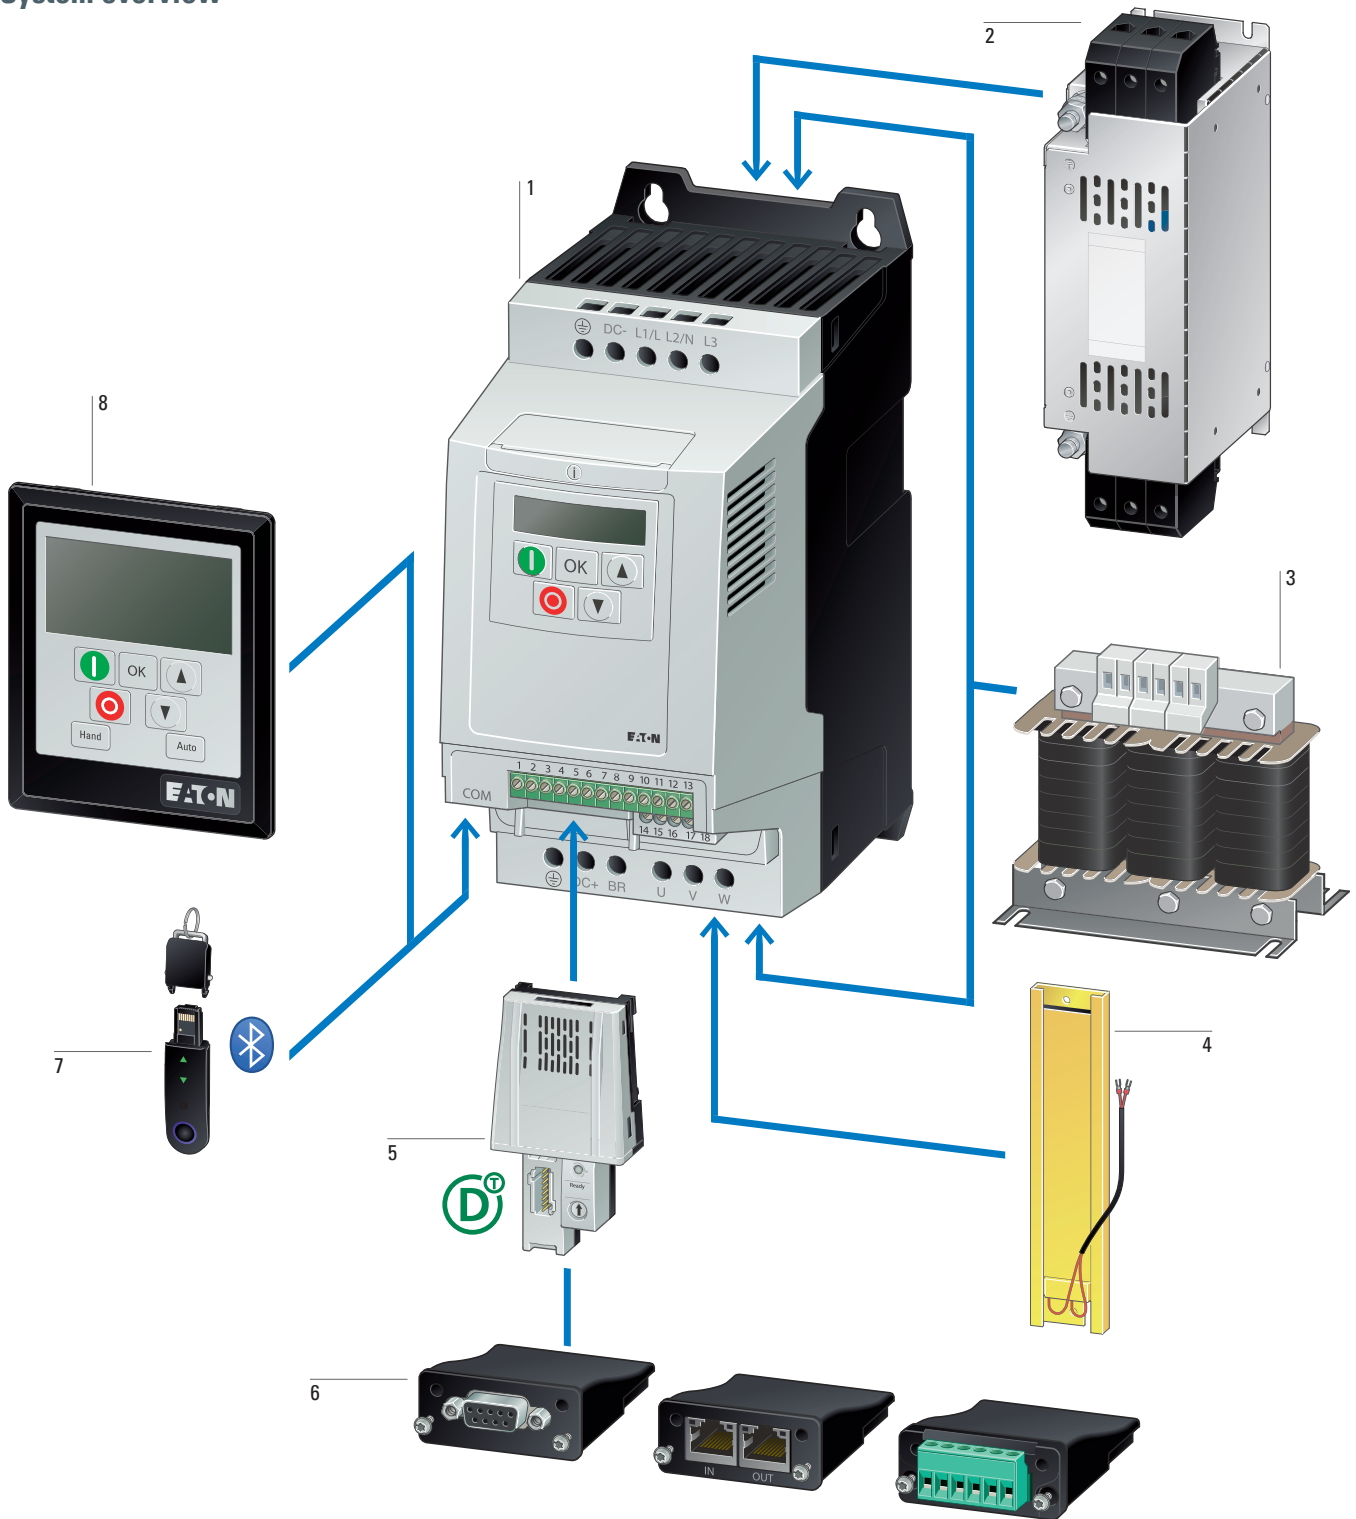


DA1

DA1 variable frequency drives	1
→ Page 149	
Radio interference suppression filter (EMC filter)	2
→ Page 256	
Mains choke, motor choke, sine filter	3
→ Page 254	
→ Page 258	
→ Page 259	

Braking resistance	4
→ Page 261	
SmartWire-DT module	5
→ Page 155	
Communication modules, expansion modules	6
→ Page 155	

Memory and Bluetooth communication stick	7
→ Page 155	
External keypad	8
→ Page 155	

Key to type references

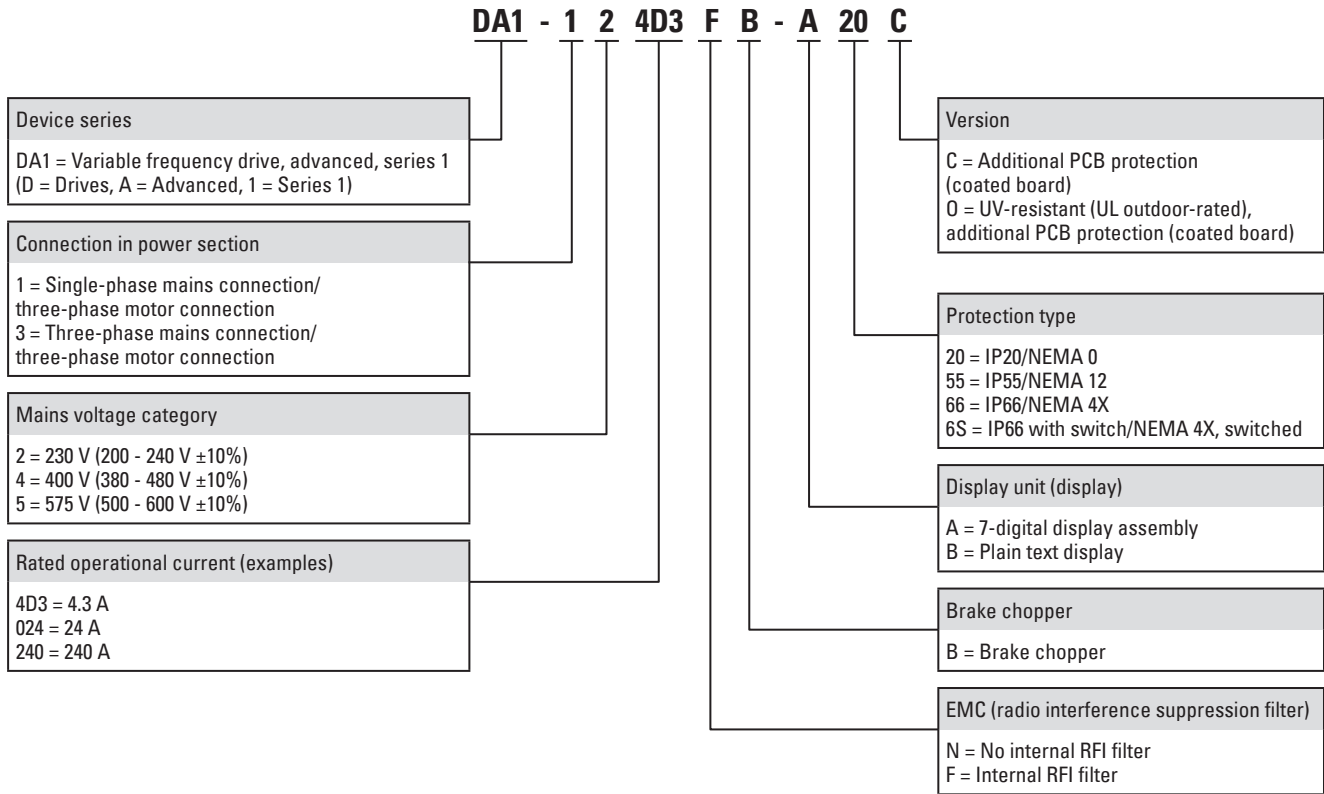













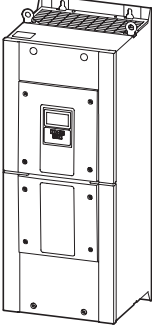

DA1

2.4

DA1 variable frequency drives up to 160 kW

Sizes and degree of protection

Sizes and degree of protection

Frame size	Protection type			
	IP20/NEMA 0	IP55/NEMA 12	IP66/NEMA 4X	IP66/NEMA 4X Local controls
FS2				
FS3				
FS4				
FS5				
FS6				
FS7				

DA1

Ordering

Rated operational current ¹⁾⁴⁾ I _b A	Assigned motor output ¹⁾²⁾³⁾		Configuration							Frame size	Protection type	Model code Catalog number	Std. pack
	P kW	P HP	Radio interference suppression filter	Brake chopper	DC link choke	7-segment display	Plain text display	Safe Torque Off	Local controls				
PowerXL DA1 variable frequency drives													
U ₁ 230 V AC, single-phase / U ₂ 230 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 200 (-10%) - 240 (+10%) V													
4.3	0.75	1	✓	✓	-	✓	-	✓	-	FS2	IP20/NEMA 0	DA1-124D3FB-A20C 169078	1 unit
7	1.5	2	✓	✓	-	✓	-	✓	-			DA1-127D0FB-A20C 169081	
10.5	2.2	3	✓	✓	-	✓	-	✓	-			DA1-12011FB-A20C 169084	
U ₁ 230 V AC, three-phase / U ₂ 230 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 200 (-10%) - 240 (+10%) V													
4.3	0.75	1	✓	✓	-	✓	-	✓	-	FS2	IP20/NEMA 0	DA1-324D3FB-A20C 169087	1 unit
7	1.5	2	✓	✓	-	✓	-	✓	-			DA1-327D0FB-A20C 169090	
10.5	2.2	3	✓	✓	-	✓	-	✓	-			DA1-32011FB-A20C 169093	
18	4	5	✓	✓	-	✓	-	✓	-	FS3		DA1-32018FB-A20C 169096	
24	5.5	7.5	✓	✓	-	✓	-	✓	-			DA1-32024FB-A20C 169099	
30	7.5	10	✓	✓	-	-	✓	✓	-	FS4		DA1-32030FB-B20C 197488	
46	11	15	✓	✓	-	-	✓	✓	-			DA1-32046FB-B20C 197489	
61	15	20	✓	✓	✓	-	✓	✓	-	FS5		DA1-32061FB-B20C 197490	
72	18.5	25	✓	✓	✓	-	✓	✓	-			DA1-32072FB-B20C 197491	
24 ⁵⁾	5.5	7.5	✓	✓	-	-	✓	✓	-	FS4	IP55/NEMA 12	DA1-32024FB-B55C 169361	
30	7.5	10	✓	✓	-	-	✓	✓	-			DA1-32030FB-B55C 169362	
46	11	15	✓	✓	-	-	✓	✓	-			DA1-32046FB-B55C 169363	
61	15	20	✓	✓	✓	-	✓	✓	-	FS5		DA1-32061FB-B55C 169364	
72	18.5	25	✓	✓	✓	-	✓	✓	-			DA1-32072FB-B55C 169365	
90 ⁵⁾	22	30	✓	✓	✓	-	✓	✓	-	FS6		DA1-32090FB-B55C 169367	
110 ⁵⁾	30	40	✓	✓	✓	-	✓	✓	-			DA1-32110FB-B55C 169369	
150 ⁵⁾	45	50	✓	✓	✓	-	✓	✓	-			DA1-32150FB-B55C 169371	
180 ⁵⁾	55	60	✓	✓	✓	-	✓	✓	-			DA1-32180FB-B55C 169373	
202 ⁵⁾	55	75	✓	✓	✓	-	✓	✓	-	FS7		DA1-32202FB-B55C 169375	
248 ⁵⁾	75	100	✓	✓	✓	-	✓	✓	-			DA1-32248FB-B55C 169377	

Notes

- ¹⁾ Overload cycle for 60 s every 600 s
- ²⁾ At 230 V, 50 Hz/at 220 - 240 V, 60 Hz
- ³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ⁴⁾ IP20/NEMA 0: Rated operational current at an operating frequency of 16 kHz and an ambient air temperature of +50 °C
IP55/NEMA 12: Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +40 °C
- ⁵⁾ IP20/NEMA 0: Rated operational current at an operating frequency of 8 kHz and an ambient air temperature of +50 °C
IP55/NEMA 12: Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C

2.4

DA1 variable frequency drives up to 160 kW

DA1 for three-phase motors 400 V, IP20/IP55

Rated operational current ¹⁾⁴⁾ I _e A	Assigned motor output ¹⁾²⁾³⁾		Configuration							Frame size	Protection type	Model code Catalog number	Std. pack
	P kW	P HP	Radio interference suppression filter	Brake chopper	DC link choke	7-segment display	Plain text display	Safe Torque Off	Local controls				
PowerXL DA1 variable frequency drives													
U ₂ 400 V AC, three-phase / U ₂ 400 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 380 (-10%) - 480 (+10%) V													
2.2	0.75	1	✓	✓	-	✓	-	✓	-	FS2	IP20/NEMA 0	DA1-342D2FB-A20C 169117	1 unit
4.1	1.5	2	✓	✓	-	✓	-	✓	-			DA1-344D1FB-A20C 169120	
5.8	2.2	3	✓	✓	-	✓	-	✓	-			DA1-345D8FB-A20C 169051	
9.5	4	5	✓	✓	-	✓	-	✓	-			DA1-349D5FB-A20C 169054	
14	5.5	7.5	✓	✓	-	✓	-	✓	-	FS3		DA1-34014FB-A20C 169057	
18	7.5	10	✓	✓	-	✓	-	✓	-			DA1-34018FB-A20C 169060	
24	11	15	✓	✓	-	✓	-	✓	-			DA1-34024FB-A20C 169063	
30	15	20	✓	✓	-	-	✓	✓	-	FS4		DA1-34030FB-B20C 197493	
39	18.5	25	✓	✓	-	-	✓	✓	-			DA1-34039FB-B20C 197494	
46	22	30	✓	✓	-	-	✓	✓	-			DA1-34046FB-B20C 197495	
61	30	40	✓	✓	✓	-	✓	✓	-	FS5		DA1-34061FB-B20C 197496	
72	37	50	✓	✓	✓	-	✓	✓	-			DA1-34072FB-B20C 197497	
24	11	15	✓	✓	-	-	✓	✓	-	FS4	IP55/NEMA 12	DA1-34024FB-B55C 169390	
30	15	20	✓	✓	-	-	✓	✓	-			DA1-34030FB-B55C 169391	
39	18.5	25	✓	✓	-	-	✓	✓	-			DA1-34039FB-B55C 169392	
46	22	30	✓	✓	-	-	✓	✓	-			DA1-34046FB-B55C 169393	
61	30	40	✓	✓	✓	-	✓	✓	-	FS5		DA1-34061FB-B55C 169394	
72	37	50	✓	✓	✓	-	✓	✓	-			DA1-34072FB-B55C 169395	
90 ⁵⁾	45	60	✓	✓	✓	-	✓	✓	-	FS6		DA1-34090FB-B55C 169397	
110 ⁵⁾	55	75	✓	✓	✓	-	✓	✓	-			DA1-34110FB-B55C 169399	
150 ⁵⁾	75	100	✓	✓	✓	-	✓	✓	-			DA1-34150FB-B55C 169401	
180 ⁵⁾	90	125	✓	✓	✓	-	✓	✓	-			DA1-34180FB-B55C 169403	
202 ⁵⁾	110	150	✓	✓	✓	-	✓	✓	-	FS7		DA1-34202FB-B55C 169405	
240 ⁵⁾	132	200	✓	✓	✓	-	✓	✓	-			DA1-34240FB-B55C 169407	
302 ⁵⁾	160	250	✓	✓	✓	-	✓	✓	-			DA1-34302FB-B55C 169217	

Notes

- ¹⁾ Overload cycle for 60 s every 600 s
- ²⁾ At 400 V, 50 Hz/at 440 - 480 V, 60 Hz
- ³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ⁴⁾ IP20/NEMA 0: Rated operational current at an operating frequency of 8 kHz and an ambient air temperature of +50 °C
IP55/NEMA 12: Rated operational current at an operating frequency of 8 kHz and an ambient air temperature of +40 °C
- ⁵⁾ IP20/NEMA 0: Rated operational current at an operating frequency of 4 kHz and an ambient air temperature of +50 °C
IP55/NEMA 12: Rated operational current at an operating frequency of 4 kHz and an ambient air temperature of +40 °C

DA1 variable frequency drives up to 160 kW

2.4

DA1 for three-phase motors 500 V, IP20/IP55

Rated operational current ¹⁾⁴⁾ I _e A	Assigned motor output ¹⁾²⁾³⁾		Configuration							Frame size	Protection type	Model code Catalog number	Std. pack
	P kW	P HP	Radio interference suppression filter	Brake chopper	DC link choke	7-segment display	Plain text display	Safe Torque Off	Local controls				
PowerXL DA1 variable frequency drives													
U ₂ 500 V AC, three-phase / U ₂ 500 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 500 (-10%) - 600 (+10%) V													
2.1	0.75	1	-	✓	-	✓	-	✓	-	FS2	IP20/NEMA 0	DA1-352D1NB-A20C 177034	1 unit
3.1	1.5	2	-	✓	-	✓	-	✓	-			DA1-353D1NB-A20C 177035	
4.1	2.2	3	-	✓	-	✓	-	✓	-			DA1-354D1NB-A20C 177036	
6.5	4	5	-	✓	-	✓	-	✓	-			DA1-356D5NB-A20C 177037	
9	5.5	7.5	-	✓	-	✓	-	✓	-			DA1-359D0NB-A20C 177038	
12	7.5	10	-	✓	-	✓	-	✓	-	FS3		DA1-35012NB-A20C 177039	
17	11	15	-	✓	-	✓	-	✓	-			DA1-35017NB-A20C 177040	
22	15	20	-	✓	-	✓	-	✓	-			DA1-35022NB-A20C 177041	
28	18.5	25	-	✓	-	-	✓	✓	-	FS4		DA1-35028NB-B20C 197499	
34	22	30	-	✓	-	-	✓	✓	-			DA1-35034NB-B20C 197500	
43	30	40	-	✓	-	-	✓	✓	-			DA1-35043NB-B20C 197501	
54	37	50	-	✓	✓	-	✓	✓	-	FS5		DA1-35054NB-B20C 197502	
65	45	60	-	✓	✓	-	✓	✓	-			DA1-35065NB-B20C 197503	
22	15	20	-	✓	-	-	✓	✓	-	FS4	IP55/NEMA 12	DA1-35022NB-B55C 176965	
28	18.5	25	-	✓	-	-	✓	✓	-			DA1-35028NB-B55C 176966	
34	22	30	-	✓	-	-	✓	✓	-			DA1-35034NB-B55C 176967	
43	30	40	-	✓	✓	-	✓	✓	-	FS5		DA1-35043NB-B55C 176968	
54	37	50	-	✓	✓	-	✓	✓	-			DA1-35054NB-B55C 176969	
65	45	60	-	✓	✓	-	✓	✓	-			DA1-35065NB-B55C 176970	
78 ⁵⁾	55	75	-	✓	✓	-	✓	✓	-	FS6		DA1-35078NB-B55C 176971	
105 ⁵⁾	75	100	-	✓	✓	-	✓	✓	-			DA1-35105NB-B55C 176972	
130 ⁵⁾	90	125	-	✓	✓	-	✓	✓	-			DA1-35130NB-B55C 176973	
150 ⁵⁾	110	150	-	✓	✓	-	✓	✓	-			DA1-35150NB-B55C 176974	

Notes

- ¹⁾ Overload cycle for 60 s every 600 s
- ²⁾ At 500 V, 50 Hz/at 550 - 600 V, 60 Hz
- ³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ⁴⁾ IP20/NEMA 0: Rated operational current at an operating frequency of 8 kHz and an ambient air temperature of +50 °C
IP55/NEMA 12: Rated operational current at an operating frequency of 8 kHz and an ambient air temperature of +40 °C
- ⁵⁾ IP20/NEMA 0: Rated operational current at an operating frequency of 4 kHz and an ambient air temperature of +50 °C
IP55/NEMA 12: Rated operational current at an operating frequency of 4 kHz and an ambient air temperature of +40 °C

DA1

2.4

DA1 variable frequency drives up to 160 kW

DA1 for three-phase motors 230 V, IP66

Rated operational current ¹⁾⁴⁾ I _e A	Assigned motor output ¹⁾²⁾³⁾		Configuration							Frame size	Protection type	Model code Catalog number	Std. pack
	P kW	P HP	Radio interference suppression filter	Brake chopper	DC link choke	7-segment display	Plain text display	Safe Torque Off	Local controls				
PowerXL DA1 variable frequency drives													
U ₁ 230 V AC, single-phase / U ₂ 230 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 200 (-10%) - 240 (+10%) V													
4.3	0.75	1	✓	✓	-	-	✓	✓	-	FS2	IP66/NEMA 4X	DA1-124D3FB-B660 EP-400015	1 unit
4.3	0.75	1	✓	✓	-	-	✓	✓	✓			DA1-124D3FB-B6S0 EP-400016	
7	1.5	2	✓	✓	-	-	✓	✓	-			DA1-127D0FB-B660 EP-400017	
7	1.5	2	✓	✓	-	-	✓	✓	✓			DA1-127D0FB-B6S0 EP-400018	
10.5	2.2	3	✓	✓	-	-	✓	✓	-			DA1-12011FB-B660 EP-400019	
10.5	2.2	3	✓	✓	-	-	✓	✓	✓			DA1-12011FB-B6S0 EP-400020	
U ₁ 230 V AC, three-phase / U ₂ 230 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 200 (-10%) - 240 (+10%) V													
4.3	0.75	1	✓	✓	-	-	✓	✓	-	FS2	IP66/NEMA 4X	DA1-324D3FB-B660 EP-400021	1 unit
4.3	0.75	1	✓	✓	-	-	✓	✓	✓			DA1-324D3FB-B6S0 EP-400022	
7	1.5	2	✓	✓	-	-	✓	✓	-			DA1-327D0FB-B660 EP-400023	
7	1.5	2	✓	✓	-	-	✓	✓	✓			DA1-327D0FB-B6S0 EP-400024	
10.5	2.2	3	✓	✓	-	-	✓	✓	-			DA1-32011FB-B660 EP-400025	
19.5	2.2	3	✓	✓	-	-	✓	✓	✓			DA1-32011FB-B6S0 EP-400026	
18	4	5	✓	✓	-	-	✓	✓	-	FS3		DA1-32018FB-B660 EP-400027	
18	4	5	✓	✓	-	-	✓	✓	✓			DA1-32018FB-B6S0 EP-400028	
24	5.5	7.5	✓	✓	-	-	✓	✓	-			DA1-32024FB-B660 EP-400029	
24	5.5	7.5	✓	✓	-	-	✓	✓	✓			DA1-32024FB-B6S0 EP-400030	
30	7.5	10	✓	✓	-	-	✓	✓	-	FS4		DA1-32030FB-B660 EP-400031	
30	7.5	10	✓	✓	-	-	✓	✓	✓			DA1-32030FB-B6S0 EP-400032	
46	11	15	✓	✓	-	-	✓	✓	-			DA1-32046FB-B660 EP-400033	
46	11	15	✓	✓	-	-	✓	✓	✓			DA1-32046FB-B6S0 EP-400034	

Notes

- ¹⁾ Overload cycle for 60 s every 600 s
- ²⁾ At 230 V, 50 Hz/at 220 - 240 V, 60 Hz
- ³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ⁴⁾ Rated operational current at a switching frequency of 16 kHz and an ambient air temperature of +40 °C

Rated operational current ¹⁾⁴⁾ I _e A	Assigned motor output ¹⁾²⁾³⁾		Configuration							Frame size	Protection type	Model code Catalog number	Std. pack
	P kW	P HP	Radio interference suppression filter	Brake chopper	DC link choke	7-segment display	Plain text display	Safe Torque Off	Local controls				
PowerXL DA1 variable frequency drives													
U ₂ 400 V AC, three-phase / U ₂ 400 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 380 (-10%) - 480 (+10%) V													
2.2	0.75	1	✓	✓	-	-	✓	✓	-	FS2	IP66/NEMA 4X	DA1-342D2FB-B660 EP-400035	1 unit
2.2	0.75	1	✓	✓	-	-	✓	✓	✓			DA1-342D2FB-B6S0 EP-400036	
4.1	1.5	2	✓	✓	-	-	✓	✓	-			DA1-344D1FB-B660 EP-400037	
4.1	1.5	2	✓	✓	-	-	✓	✓	✓			DA1-344D1FB-B6S0 EP-400038	
5.8	2.2	3	✓	✓	-	-	✓	✓	-			DA1-345D8FB-B660 EP-400039	
5.8	2.2	3	✓	✓	-	-	✓	✓	✓			DA1-345D8FB-B6S0 EP-400040	
9.5	4	5	✓	✓	-	-	✓	✓	-			DA1-349D5FB-B660 EP-400041	
9.5	4	5	✓	✓	-	-	✓	✓	✓			DA1-349D5FB-B6S0 EP-400042	
14	5.5	7.5	✓	✓	-	-	✓	✓	-	FS3		DA1-34014FB-B660 EP-400043	
14	5.5	7.5	✓	✓	-	-	✓	✓	✓			DA1-34014FB-B6S0 EP-400044	
18	7.5	10	✓	✓	-	-	✓	✓	-			DA1-34018FB-B660 EP-400045	
18	7.5	10	✓	✓	-	-	✓	✓	✓			DA1-34018FB-B6S0 EP-400046	
24	11	15	✓	✓	-	-	✓	✓	-			DA1-34024FB-B660 EP-400047	
24	11	15	✓	✓	-	-	✓	✓	✓			DA1-34024FB-B6S0 EP-400048	
30	15	20	✓	✓	-	-	✓	✓	-	FS4		DA1-34030FB-B660 EP-400049	
30	15	20	✓	✓	-	-	✓	✓	✓			DA1-34030FB-B6S0 EP-400050	
39	18.5	25	✓	✓	-	-	✓	✓	-			DA1-34039FB-B660 EP-400051	
39	18.5	25	✓	✓	-	-	✓	✓	✓			DA1-34039FB-B6S0 EP-400052	
46	22	30	✓	✓	-	-	✓	✓	-			DA1-34046FB-B660 EP-400053	
46	22	30	✓	✓	-	-	✓	✓	✓			DA1-34046FB-B6S0 EP-400054	

Notes

¹⁾ Overload cycle for 60 s every 600 s

²⁾ DA1-34... : at 400 V, 50 Hz/at 440 - 480 V, 60 Hz

DA1-35... : at 500 V, 50 Hz/bei 550 - 600 V, 60 Hz

³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

⁴⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C

2.4

DA1 variable frequency drives up to 160 kW

DA1 for three-phase motors 400 V/500 V, IP66

Rated operational current ¹⁾⁴⁾ I _e A	Assigned motor output ¹⁾²⁾³⁾		Configuration								Frame size	Protection type	Model code Catalog number	Std. pack	
	P kW	P HP	Radio interference suppression filter	Brake chopper	DC link choke	7-segment display	Plain text display	Safe Torque Off	Local controls						
PowerXL DA1 variable frequency drives															
U ₂ 500 V AC, three-phase / U ₂ 500 V AC, three-phase Mains voltage (50/60Hz) U _{LN} 500 (-10%) - 600 (+10%) V															
2.1	0.75	1	-	✓	-	-	✓	✓	-	FS2	IP66/NEMA 4X	DA1-352D1NB-B660 EP-400055	1 unit		
2.1	0.75	1	-	✓	-	-	✓	✓	✓			DA1-352D1NB-B6SO EP-400056			
3.1	1.5	2	-	✓	-	-	✓	✓	-			DA1-353D1NB-B660 EP-400057			
3.1	1.5	2	-	✓	-	-	✓	✓	✓			DA1-353D1NB-B6SO EP-400058			
4.1	2.2	3	-	✓	-	-	✓	✓	-			DA1-354D1NB-B660 EP-400059			
4.1	2.2	3	-	✓	-	-	✓	✓	✓			DA1-354D1NB-B6SO EP-400060			
6.5	4	5	-	✓	-	-	✓	✓	-			DA1-356D5NB-B660 EP-400061			
6.5	4	5	-	✓	-	-	✓	✓	✓			DA1-356D5NB-B6SO EP-400062			
9	5.5	7.5	-	✓	-	-	✓	✓	-			DA1-359D0NB-B660 EP-400063			
9	5.5	7.5	-	✓	-	-	✓	✓	✓			DA1-359D0NB-B6SO EP-400064			
12	7.5	10	-	✓	-	-	✓	✓	-			FS3		DA1-35012NB-B660 EP-400065	
12	7.5	10	-	✓	-	-	✓	✓	✓					DA1-35012NB-B6SO EP-400066	
17	11	15	-	✓	-	-	✓	✓	-					DA1-35017NB-B660 EP-400067	
17	11	15	-	✓	-	-	✓	✓	✓					DA1-35017NB-B6SO EP-400068	
22	15	20	-	✓	-	-	✓	✓	-	DA1-35022NB-B660 EP-400069					
22	15	20	-	✓	-	-	✓	✓	✓	DA1-35022NB-B6SO EP-400070					
28	18.5	25	-	✓	-	-	✓	✓	-	FS4	DA1-35028NB-B660 EP-400071				
28	18.5	25	-	✓	-	-	✓	✓	✓		DA1-35028NB-B6SO EP-400072				
34	22	30	-	✓	-	-	✓	✓	-		DA1-35034NB-B660 EP-400073				
34	22	30	-	✓	-	-	✓	✓	✓		DA1-35034NB-B6SO EP-400074				
43	22	30	-	✓	-	-	✓	✓	-		DA1-35043NB-B660 EP-400075				
43	22	30	-	✓	-	-	✓	✓	✓		DA1-35043NB-B6SO EP-400076				









Notes

¹⁾ Overload cycle for 60 s every 600 s

²⁾ DA1-34... : at 400 V, 50 Hz/at 440 - 480 V, 60 Hz
DA1-35... : at 500 V, 50 Hz/bei 550 - 600 V, 60 Hz

³⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz






⁴⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C

	Description	Length m	For use with	Model code Catalog number	Std. pack
	External operating units				
	With 7-digit display assembly Front IP54 With approx. 3 m-long, plug-in connection cable (RJ45, 8-pin)	3	DE1, DE11, DC1, DB1, DA1	DX-KEY-LED2 186946	1 unit
	With multi-language plain text display (OLED) Front IP54 With approx. 3 m-long, plug-in connection cable (RJ45, 8-pin)	3	DC1, DB1, DA1, RAM05, RASP5	DX-KEY-OLED 169133	
	Expansion modules				
	Output expansion Plug-in module with plug-in terminal block, 5 pole 3 relay outputs (N/O, 250 V AC, max. 6 A/ 30 V DC, max. 5 A)	–	DA1	DXA-EXT-3RO 169121	1 unit
	I/O expansion Plug-in module with plug-in terminal block, 6 pole 3 digital inputs (+24 V) 1 relay output (N/O, 250 V AC, max. 6 A/ 30 V DC, max. 5 A)	–	DA1	DXA-EXT-3DI1RO 169036	
	Encoder module Plug-in module with plug-in terminal block, 5 pole 2-channel max. 500 kHz 5 V TTL, A & B, /A & /B, 5 V DC, max. 200 mA 24 V HTL, A & B, /A & /B, 24 V DC, external power supply required, max. 30 V DC	–	DA1	DXA-EXT-ENCOD 169035	
Communication modules					
	SmartWire-DT Plug-in module with slot for SWD4-8SF2-5 external device plug	–	DA1 (IP20, IP55)	DX-NET-SWD1 169129	1 unit
	PROFIBUS SUB-D socket, 9-pole Plug-in module	–	DA1	DX-NET-PROFIBUS 169124	1 unit
	PROFINET 2 x RJ45, 8 pole Plug-in module	–	DA1	DX-NET-PROFINET-2 169125	
	Modbus TCP 2 x RJ45, 8 pole Plug-in module	–	DA1	DX-NET-MOVBUSTCP-2 169126	
	Ethernet/IP 2 x RJ45, 8 pole Plug-in module	–	DA1	DX-NET-ETHERNET-2 169122	
	EtherCAT 2 x RJ45, 8 pole Plug-in module	–	DA1	DX-NET-ETHERCAT-2 169127	
	BACnet/IP 2 x RJ45, 8 pole Plug-in module	–	DA1	DX-NET-BACNETIP-2 169128	
Parameter assignment					
	Parameter storage unit and Bluetooth communication stick For storage, copying parameters, and/or transferring parameters to a PC or smartphone (iOS or Android) via Bluetooth with the drivesConnect software or the drivesConnect mobile app respectively With 2 function keys for uploading and downloading parameters with configuration memory	–	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-COM-STICK3 197585	1 unit
Programming cable					
	Interface converter USB/RS485 with connection cable, RJ45 8 pole For storage, copying parameters, and/or transferring parameters to a PC with the drivesConnect software, electrically isolated	3	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-CBL-PC-3M0 744-A3036-00P	1 unit

2.4


DA1 variable frequency drives up to 160 kW

Accessories

	Description	Length m	For use with	Model code Catalog number	Std. pack	
	License keys to activate the function block editor in the PC software USB flash drive	–	DA1	DX-COM-SOFT 169136	1 unit	
	Connection cable Patch cord with RJ45 plugs, 8 pole	0.5 1 3	DE1, DE11, DC1, DB1, DA1	DX-CBL-RJ45-0M5 169137 DX-CBL-RJ45-1M0 169138 DX-CBL-RJ45-3M0 169139	1 unit	
	Bus terminating resistor RJ45 8 pole Connection to CANopen (pin 1/2, 124 Ω) or to Modbus RTU (pin 7/8, 120 Ω)	–	DX-SPL-RJ45-2SL-1PL	EASY-NT-R 256281	2 units	
	Splitter RJ45, 8-pin, 3 sockets RJ45, 8-pin, 2 sockets/1 plug	–	DX-CBL-RJ45... DE1, DE11, DC1, DB1, DA1	DX-SPL-RJ45-3SL 169141 DX-SPL-RJ45-2SL1PL 169142	1 unit	
	Mounting accessories Mounting adapter with gland plates For installing the connection cables on the mains side For installing the connection cables on the motor side	Size FS2 Size FS3 Size FS2 Size FS3	– – – –	DC1 (IP20), DA1 (IP20) DC1 (IP20), DA1 (IP20) DC1 (IP20), DA1 (IP20) DC1 (IP20), DA1 (IP20)	DX-EMC-MNT-2N 172927 DX-EMC-MNT-3N 172929 DX-EMC-MNT-2M 172928 DX-EMC-MNT-3M 172930	1 unit

Engineering

DA1-...-A20C

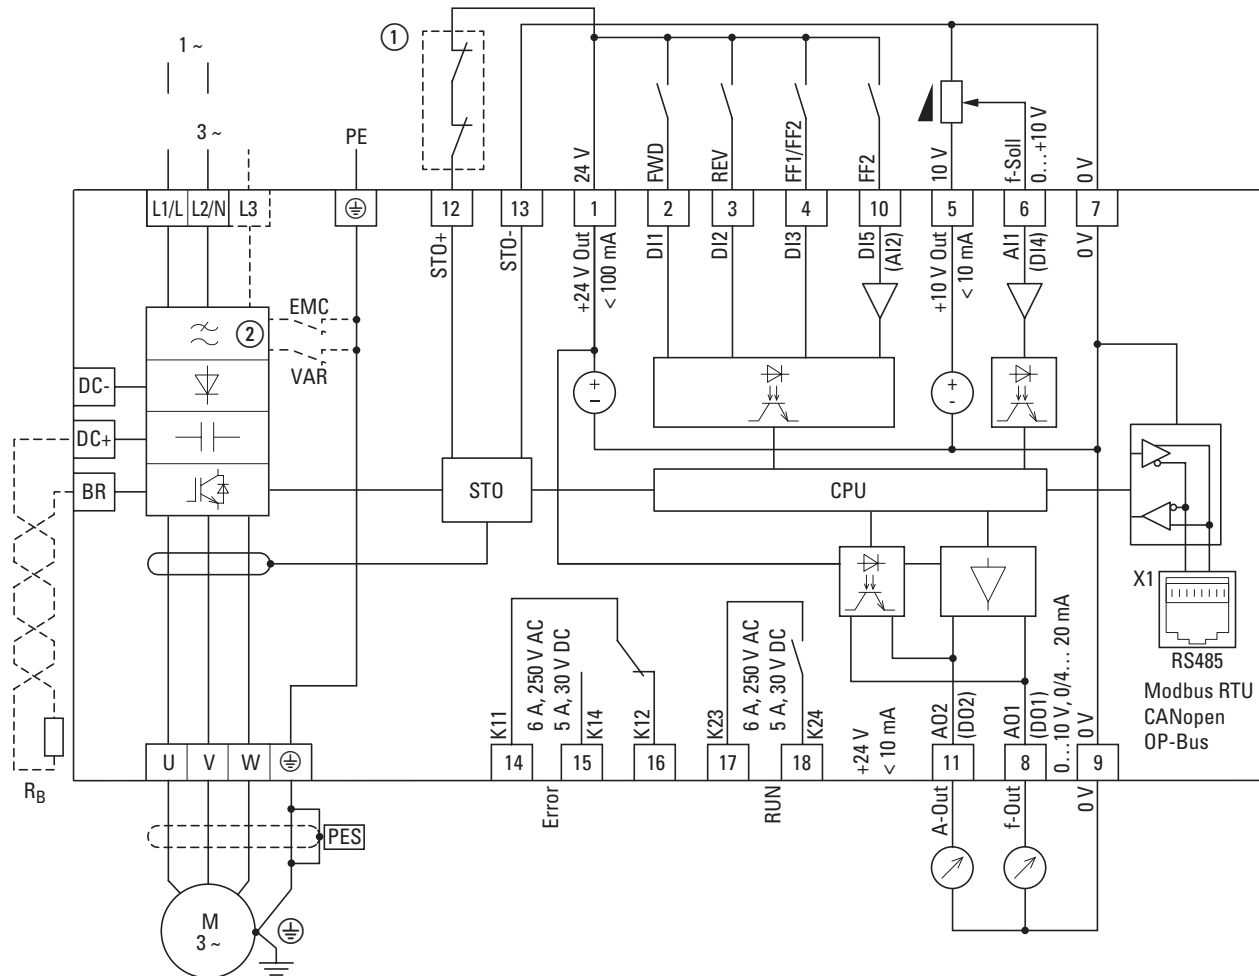

- ① Relay: Safe Torque Off (STO), SIL 2 (EN 61800-5-2).
- ② The RFI filter is not included in the DA1-35-...-B6XC device.

- The STO connection must be made by the user.
- The VAR screw cannot be disabled in devices with a size of FS4 or FS5.

Model code	Mains		Motor	
	Voltage U_{LN}	Frequency f_{LN}	Voltage U_2	Frequency f_2
DA1-12-...-A20C	1~ 200 V (-10%) - 240 V (+10%)	50/60 Hz	3~ 230 V	0 - 500 Hz
DA1-32-...-A20C	3~ 200 V (-10%) - 240 V (+10%)	50/60 Hz	3~ 230 V	0 - 500 Hz
DA1-34-...-A20C	3~ 380 V (-10%) - 480 V (+10%)	50/60 Hz	3~ 400 V/460 V	0 - 500 Hz
DA1-35-...-A20C	3~ 500 V (-10%) - 600 V (+10%)	50/60 Hz	3~ 500 V/575 V	0 - 500 Hz


DA1

2.4

DA1 variable frequency drives up to 160 kW

Block diagram

DA1-...-B55C

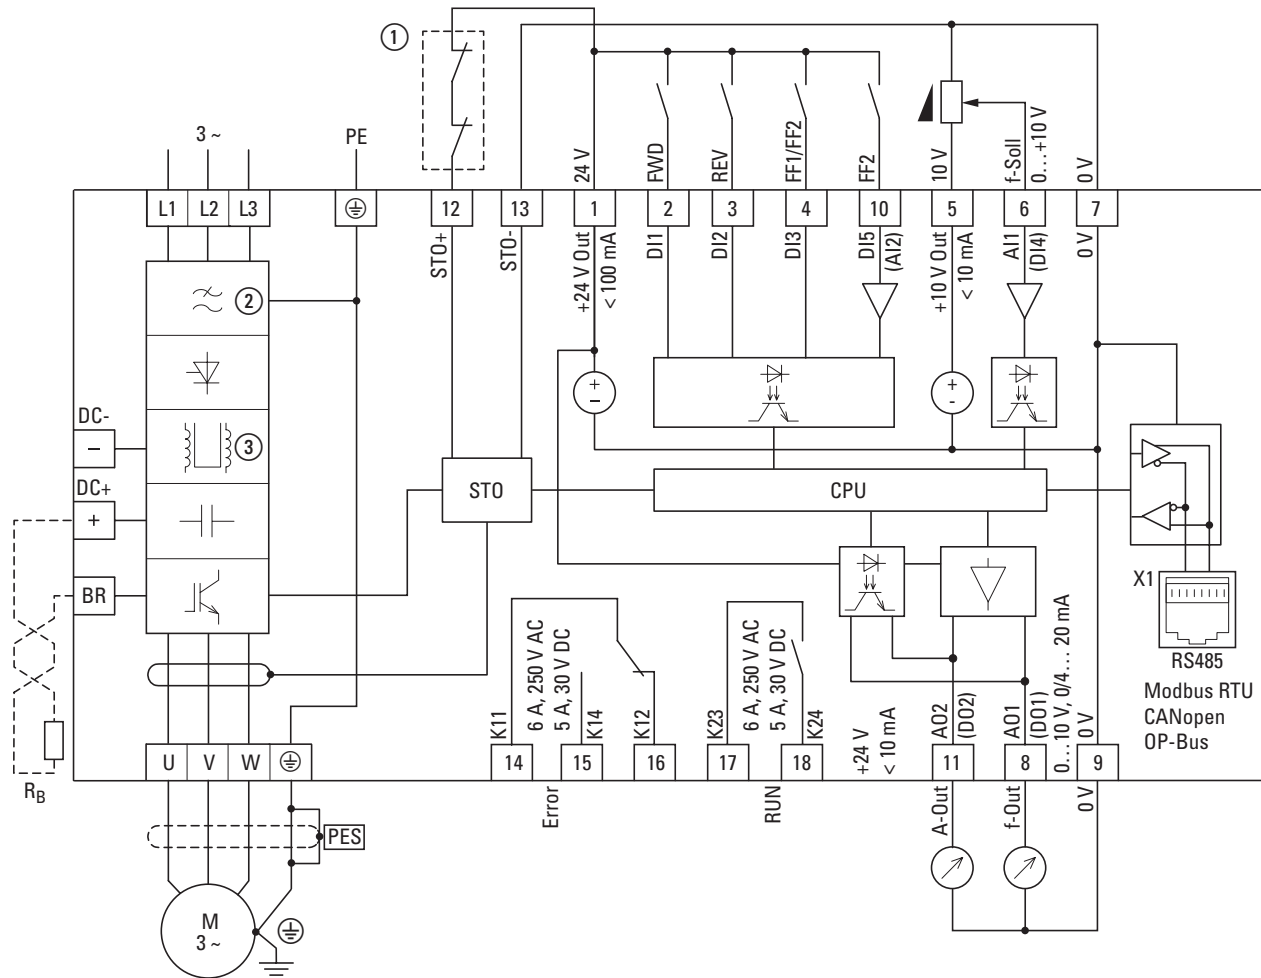


- ① Direct enable signal for STO function or relay: Safe Torque Off (STO), SIL 2 (EN 61800-5-2).
- ② The RFI filter is not included in the DA1-35-...-B6XC device.
- ③ A DC link choke is included in sizes of FS5, FS6, FS7.

- The STO connection must be made by the user.
- The VAR screw cannot be disabled in devices with a size of FS4, FS5, FS6, or FS7.

Model code	Mains		Motor	
	Voltage U_{LN}	Frequency f_{LN}	Voltage U_2	Frequency f_2
DA1-32-...-B55C	3~ 200 V (-10%) - 240 V (+10%)	50/60 Hz	3~ 230 V	0 - 500 Hz
DA1-34-...-B55C	3~ 380 V (-10%) - 480 V (+10%)	50/60 Hz	3~ 400 V/460 V	0 - 500 Hz
DA1-35-...-B55C	3~ 500 V (-10%) - 600 V (+10%)	50/60 Hz	3~ 500 V/575 V	0 - 500 Hz

DA1-...-B6SC

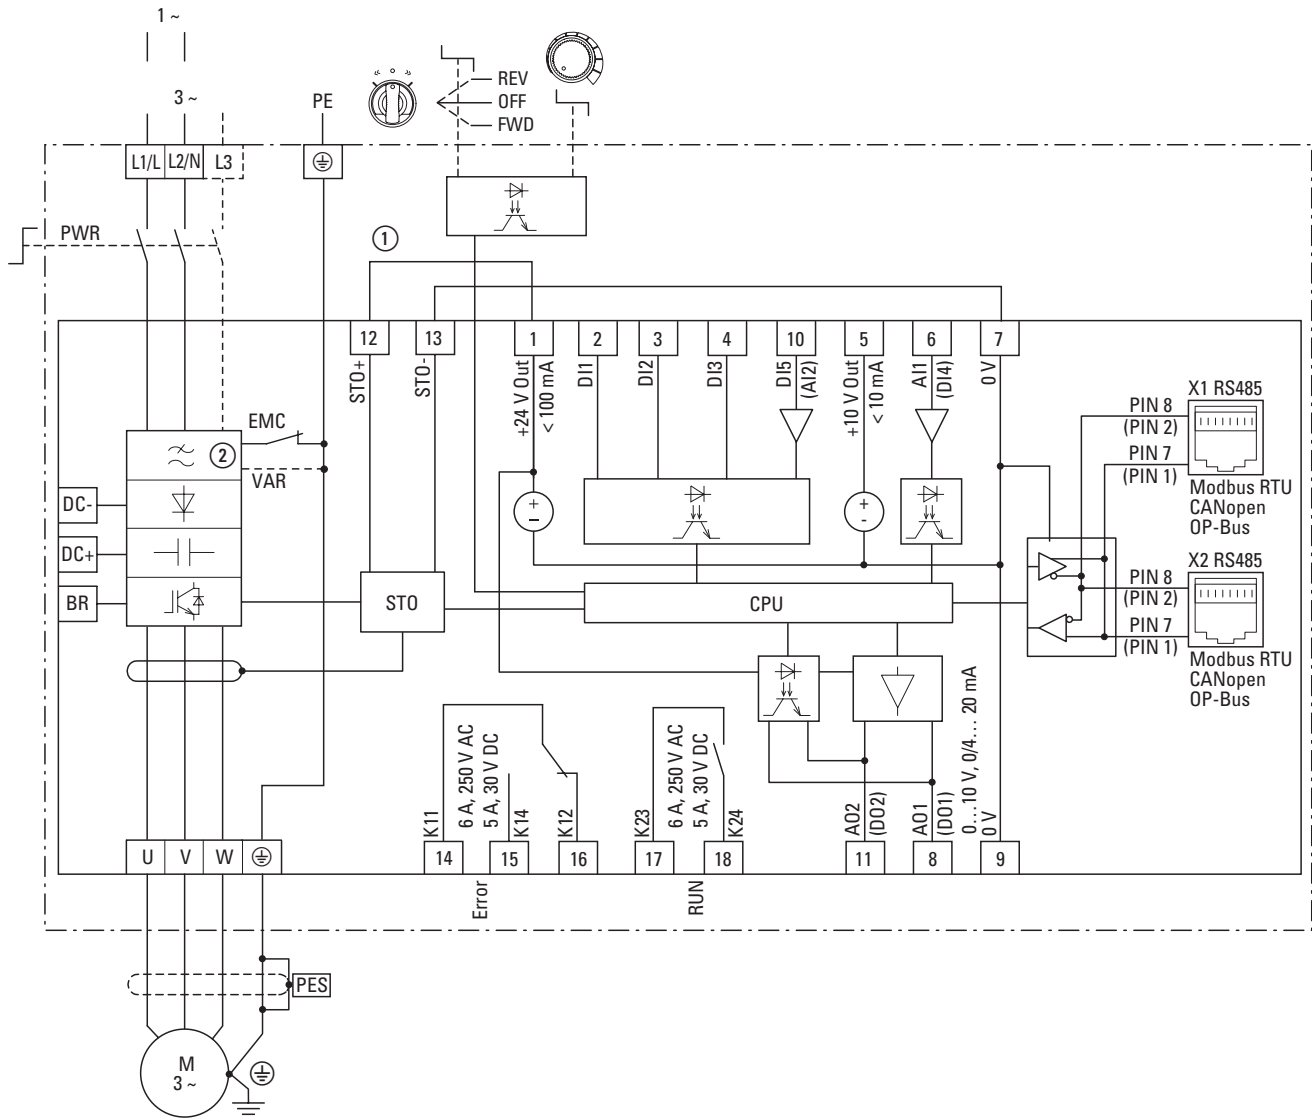

- ① Direct enable signal for STO function or relay: Safe Torque Off (STO), SIL 2 (EN 61800-5-2).
- ② The RFI filter is not included in the DA1-35-...-B6XC device.

→ The STO connection must be made by the user.

Model code	Mains		Motor	
	Voltage U_{LN}	Frequency f_{LN}	Voltage U_2	Frequency f_2
DA1-12-...-B6SC	1~ 200 V (-10%) - 240 V (+10%)	50/60 Hz	3~ 230 V	0 - 500 Hz
DA1-32-...-B6SC	3~ 200 V (-10%) - 240 V (+10%)	50/60 Hz	3~ 230 V	0 - 500 Hz
DA1-34-...-B6SC	3~ 380 V (-10%) - 480 V (+10%)	50/60 Hz	3~ 400 V/460 V	0 - 500 Hz
DA1-35-...-B6SC	3~ 500 V (-10%) - 600 V (+10%)	50/60 Hz	3~ 500 V/575 V	0 - 500 Hz

2.4

DA1 variable frequency drives up to 160 kW

Assigned switching and protective elements for DA1

Model code	power rating 150 % kW	input current 150 % A	output current 150 % A	MCCB Type 1 coordination @ 150 %	Fuse Type 1 coordination @ 150 %	minimum braking resistance	recommended braking resistance	brake resistor, 10 % duty cycle @ 150 %	brake resistor, 20 % duty cycle @ 150 %	brake resistor, 40 % duty cycle @ 150 %
230 V AC, single-phase/230 V AC, three-phase										
DA1-124D3...	0.75	8.6	4.3	PKZM0-16	C10G16	25	100	DX-BR3-100	DX-BR100-600	DX-BR100-1K1
DA1-127D0...	1.5	12.9	7	PKZM0-25	C10G25	25	50	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1
DA1-12011...	2.2	19.2	10.5	PKZM0-32	C10G32	25	35	DX-BR035-1K1	DX-BR035-1K1	DX-BR040-3K1
230 V AC, three-phase/230 V AC, three-phase										
DA1-324D3...	0.75	5.7	4.3	PKZM0-12	C10G12	25	100	DX-BR3-100	DX-BR100-600	DX-BR100-1K1
DA1-327D0...	1.5	10.5	7	PKZM0-20	C10G20	25	50	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1
DA1-32011...	2.2	13.2	10.5	PKZM0-25	C10G25	25	35	DX-BR035-1K1	DX-BR035-1K1	DX-BR040-3K1
DA1-32018...	4	20.9	18	PKZM4-40	C22G40	20	20	DX-BR022-1K4	DX-BR022-1K4	DX-BR022-3K1
DA1-32024...	5.5	26.4	24	PKZM4-50	C22G50	20	20	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-3K1
DA1-32030...	7.5	33.3	30	PKZM4-63	C22G63	12	22	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-5K1
DA1-32046...	11	50.1	46	NZMC1-A80	C22G80	12	22	DX-BR022-3K1	DX-BR022-5K1	DX-BR022-9K2
DA1-32061...	15	63.9	61	NZMC1-A100	C22G100	6	12	DX-BR012-3K1	DX-BR012-5K1	DX-BR012-9K2
DA1-32072...	18.5	74	72	NZMC1-A125	C22G125	6	12	DX-BR012-5K1	DX-BR012-9K2	P: 2x DX-BR012-5K1
DA1-32090...	22	99.1	90	NZMC1-A160	160NHG02B-400	6	6	DX-BR006-5K1	DX-BR006-9K2	DX-BR006-18K1
DA1-32110...	30	121	110	NZMC2-A200	200NHG02B-400	3	6	DX-BR006-5K1	DX-BR006-9K2	DX-BR006-18K1
DA1-32150...	45	159.7	150	NZMC2-A250	250NHG02B-400	3	6	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
DA1-32180...	55	187.5	180	NZMC2-A300	315NHG2B-400	3	6	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
DA1-32202...	55	206.3	202	NZMC3-A400	400NHG03B-400	3	6	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
DA1-32248...	75	255.5	248	NZMC3-A400	400NHG03B-400	3	6	DX-BR006-18K1	DX-BR006-33K3	DX-BR002-54K3
400 V AC, three-phase/400 V AC, three-phase										
DA1-342D2...	0.75	3.5	2.2	PKZM0-6,3	C10G8	50	400	DX-BR216-600	DX-BR216-600	DX-BR216-600
DA1-344D1...	1.5	5.6	4.1	PKZM0-10	C10G10	50	200	DX-BR200-0K8	DX-BR200-0K8	DX-BR150-1K1
DA1-345D8...	2.2	7.5	5.8	PKZM0-16	C10G16	50	150	DX-BR150-800	DX-BR150-1K1	DX-BR047-3K1
DA1-349D5...	4	11.5	9.5	PKZM0-20	C10G20	50	100	DX-BR100-1K1	DX-BR100-1K6	DX-BR047-3K1
DA1-34014...	5.5	17.2	14	PKZM0-32	C10G32	40	75	DX-BR075-1K1	DX-BR047-3K1	DX-BR075-5K1
DA1-34018...	7.5	21.8	18	PKZM4-40	C22G40	40	50	DX-BR047-3K1	DX-BR047-3K1	DX-BR050-5K1
DA1-34024...	11	27.5	24	PKZM4-50	C22G50	40	40	DX-BR040-3K1	DX-BR040-5K1	DX-BR047-9K2
DA1-34030...	15	34.2	30	PKZM4-63	C22G63	22	22	DX-BR022-3K1	DX-BR022-5K1	DX-BR022-9K2
DA1-34039...	18.5	44.1	39	NZMC1-A80	C22G80	22	22	DX-BR022-5K1	DX-BR022-9K2	P: 2x DX-BR047-9K2
DA1-34046...	22	51.9	46	NZMC1-A100	C22G100	22	22	DX-BR022-5K1	DX-BR022-9K2	P: 2x DX-BR047-9K2
DA1-34061...	30	66.1	61	NZMC1-A100	C22G100	12	12	DX-BR012-5K1	DX-BR012-9K2	DX-BR012-18K1
DA1-34072...	37	77.3	72	NZMC1-A125	C22G125	12	12	DX-BR012-9K2	DX-BR012-18K1	P: 2x DX-BR022-9K2
DA1-34090...	45	102.7	90	NZMC1-A160	160NHG02B-400	6	6	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
DA1-34110...	55	126.4	110	NZMC2-A200	200NHG02B-400	6	6	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
DA1-34150...	75	164.7	150	NZMC2-A300	315NHG2B-400	6	6	DX-BR006-18K1	DX-BR006-33K3	on request
DA1-34180...	90	192.1	180	NZMC2-A300	315NHG2B-400	6	6	DX-BR006-18K1	DX-BR006-33K3	on request
DA1-34202...	110	210.8	202	NZMC3-A400	400NHG03B-400	6	6	DX-BR006-18K1	DX-BR006-33K3	on request
DA1-34240...	132	244.5	240	NZMC3-A400	400NHG03B-400	6	6	DX-BR006-33K3	on request	on request
DA1-34302...	160	307.8	302	NZMC3-A500	500NHG3B-400	6	6	DX-BR006-33K3	on request	on request
500 V AC, three-phase/500 V AC, three-phase										
DA1-352D1...	0.75	3.4	2.1	PKZM0-6,3	C14G8	600	600	R: 3x DX-BR200-0K8	R: 3x DX-BR200-0K8	R: 3x DX-BR200-0K8
DA1-353D1...	1.5	4.2	3.1	PKZM0-10	C14G8	300	300	R: 2x DX-BR150-800	R: 2x DX-BR150-800	R: 2x DX-BR150-1K1
DA1-354D1...	2.2	4.9	4.1	PKZM0-10	C14G10	200	200	DX-BR200-0K8	DX-BR200-0K8	R: 2x DX-BR100-1K6
DA1-356D5...	4	8.6	6.5	PKZM0-16	C14G16	150	150	DX-BR150-1K1	R: 2x DX-BR075-5K1	R: 2x DX-BR075-5K1
DA1-359D0...	5.5	12.2	9	PKZM0-20	C14G20	100	100	DX-BR100-1K1	R: 2x DX-BR047-3K1	DX-BR100-6K2
DA1-35012...	7.5	15.1	12	PKZM0-25	C14G25	80	80	DX-BR100-1K6	R: 2x DX-BR040-3K1	R: 2x DX-BR040-5K1
DA1-35017...	11	20.9	17	PKZM4-40	C22G40	50	50	DX-BR047-3K1	DX-BR050-5K1	DX-BR047-9K2
DA1-35022...	15	26	22	PKZM4-50	C22G50	33	33	DX-BR040-3K1	DX-BR040-5K1	P: 2x DX-BR075-5K1
DA1-35028...	18.5	32.2	28	PKZM4-63	C22G63	33	33	DX-BR040-5K1	P: 2x DX-BR075-5K1	P: 2x DX-BR075-5K1
DA1-35034...	22	39.1	34	PKZM4-63	C22G63	22	22	DX-BR022-5K1	DX-BR022-9K2	P: 2x DX-BR047-9K2
DA1-35043...	30	48.9	43	NZMC1-A80	80NHG1B-690	16	16	DX-BR022-9K2	P: 2x DX-BR040-5K1	P: 2x DX-BR047-9K2
DA1-35054...	37	59.9	54	NZMC1-A100	100NHG1B-690	16	16	DX-BR022-9K2	P: 2x DX-BR047-9K2	P: 2x DX-BR047-9K2
DA1-35065...	45	70.4	65	NZMC1-A125	125NHG1B-690	12	12	DX-BR012-9K2	DX-BR012-18K1	R: 2x DX-BR006-33K3
DA1-35078...	55	90.6	78	NZMC1-A160	160NHG1B-690	12	12	DX-BR012-9K2	DX-BR012-18K1	R: 2x DX-BR006-33K3
DA1-35105...	75	121.1	105	NZMC2-A200	200NHG1B-690	8	8	DX-BR012-18K1	DX-BR006-33K3	on request
DA1-35130...	90	143.2	130	NZMC2-A250	250NHG1B-690	8	8	DX-BR012-18K1	DX-BR006-33K3	on request
DA1-35150...	110	158.4	150	NZMC2-A250	250NHG1B-690	8	8	DX-BR012-18K1	DX-BR006-33K3	on request

Notes R: = mount in series
P: = mount in parallel

Assigned switching and protective elements for DA1

RCD type @ 150 %	optional mains contactor @ 150 %	External EMC filter @ 150 %	External EMC filter (low leakage current) @ 150 %	Mains choke @ 150 %	U _k	passive harmonic filter @ 150 %	Motor choke @ 150 %	Sine filter @ 150 %	All-pole sine filter @ 150 %
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-012	DX-EMC12-012-SL	DX-LN1-013	4 %	-	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC12-016	DX-EMC12-016-SL	DX-LN1-018	4 %	-	DX-LM3-008	DX-SIN3-010	DX-SIN3-013-A
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC12-020	DX-EMC12-020-SL	DX-LN1-024	4 %	-	DX-LM3-011	DX-SIN3-016	DX-SIN3-013-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-006	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016-L	DX-LN3-016	4 %	DX-PHF34-019	DX-LM3-008	DX-SIN3-010	DX-SIN3-013-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016-L	DX-LN3-016	4 %	DX-PHF34-019	DX-LM3-011	DX-SIN3-016	DX-SIN3-013-A
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030-L	DX-LN3-025	4 %	DX-PHF34-026	DX-LM3-035	DX-SIN3-023	DX-SIN3-024-A
FRCdM-63/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030-L	DX-LN3-040	2.5 %	DX-PHF34-026	DX-LM3-035	DX-SIN3-032	DX-SIN3-024-A
FRCdM-63/4/003-G/Bfq	DILM40(RDC24)	DX-EMC34-042	DX-EMC34-042-L	DX-LN3-040	2.5 %	DX-PHF34-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-046-A
-	DILM50(RDC24)	DX-EMC34-055	DX-EMC34-055-L	DX-LN3-050	2.5 %	DX-PHF34-073	DX-LM3-050	DX-SIN3-048	DX-SIN3-046-A
-	DILM72(RDC24)	DX-EMC34-075	DX-EMC34-075-L	DX-LN3-080	2.5 %	DX-PHF34-073	DX-LM3-063	DX-SIN3-061	DX-SIN3-065-A
-	DILM95(RDC24)	DX-EMC34-075	DX-EMC34-075-L	DX-LN3-080	2.5 %	DX-PHF34-102	DX-LM3-080	DX-SIN3-072	DX-SIN3-110-A
-	DILM115(RDC24)	DX-EMC34-100	DX-EMC34-100-L	DX-LN3-100	2.5 %	DX-PHF34-102	DX-LM3-100	DX-SIN3-090	DX-SIN3-110-A
-	DILM150(RDC24)	DX-EMC34-130	DX-EMC34-130-L	DX-LN3-160	2.5 %	DX-PHF34-144	DX-LM3-150	DX-SIN3-115	DX-SIN3-110-A
-	DILM185A/22(RAC240)	DX-EMC34-180	DX-EMC34-180-L	DX-LN3-160	2.5 %	DX-PHF34-180	DX-LM3-150	DX-SIN3-150	P: 2x DX-SIN3-110-A
-	DILM225A/22(RAC240)	DX-EMC34-250	DX-EMC34-250-L	DX-LN3-200	2.5 %	DX-PHF34-217	DX-LM3-180	DX-SIN3-180	P: 2x DX-SIN3-110-A
-	DILM225A/22(RAC240)	DX-EMC34-250	DX-EMC34-250-L	DX-LN3-250	2.5 %	DX-PHF34-217	DX-LM3-220	DX-SIN3-250	-
-	DILM300A/22(RA250)	DX-EMC34-400	DX-EMC34-400-L	DX-LN3-300	2.5 %	DX-PHF34-289	DX-LM3-260	DX-SIN3-250	-
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-006	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-004	DX-SIN3-2D5-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-006	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008-L	DX-LN3-010	4 %	DX-PHF34-010	DX-LM3-008	DX-SIN3-010	DX-SIN3-006-A
FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016-L	DX-LN3-016	4 %	DX-PHF34-019	DX-LM3-011	DX-SIN3-010	DX-SIN3-013-A
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030-L	DX-LN3-025	4 %	DX-PHF34-019	DX-LM3-016	DX-SIN3-016	DX-SIN3-024-A
FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030-L	DX-LN3-025	4 %	DX-PHF34-026	DX-LM3-035	DX-SIN3-023	DX-SIN3-024-A
FRCdM-63/4/003-G/Bfq	DILM40(RDC24)	DX-EMC34-030	DX-EMC34-030-L	DX-LN3-040	2.5 %	DX-PHF34-026	DX-LM3-035	DX-SIN3-032	DX-SIN3-024-A
FRCdM-63/4/003-G/Bfq	DILM40(RDC24)	DX-EMC34-042	DX-EMC34-042-L	DX-LN3-040	2.5 %	DX-PHF34-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-046-A
-	DILM50(RDC24)	DX-EMC34-055	DX-EMC34-055-L	DX-LN3-050	2.5 %	DX-PHF34-044	DX-LM3-050	DX-SIN3-048	DX-SIN3-046-A
-	DILM50(RDC24)	DX-EMC34-055	DX-EMC34-055-L	DX-LN3-080	2.5 %	DX-PHF34-073	DX-LM3-050	DX-SIN3-048	DX-SIN3-046-A
-	DILM80(RDC24)	DX-EMC34-075	DX-EMC34-075-L	DX-LN3-080	2.5 %	DX-PHF34-073	DX-LM3-063	DX-SIN3-061	DX-SIN3-065-A
-	DILM95(RDC24)	DX-EMC34-100	DX-EMC34-100-L	DX-LN3-080	2.5 %	DX-PHF34-102	DX-LM3-080	DX-SIN3-072	DX-SIN3-110-A
-	DILM115(RDC24)	DX-EMC34-130	DX-EMC34-130-L	DX-LN3-160	2.5 %	DX-PHF34-144	DX-LM3-100	DX-SIN3-090	DX-SIN3-110-A
-	DILM150(RDC24)	DX-EMC34-130	DX-EMC34-130-L	DX-LN3-120	2.5 %	DX-PHF34-144	DX-LM3-150	DX-SIN3-115	DX-SIN3-110-A
-	DILM185A/22(RAC240)	DX-EMC34-180	DX-EMC34-180-L	DX-LN3-200	2.5 %	DX-PHF34-180	DX-LM3-150	DX-SIN3-150	P: 2x DX-SIN3-110-A
-	DILM225A/22(RAC240)	DX-EMC34-250	DX-EMC34-250-L	DX-LN3-200	2.5 %	DX-PHF34-217	DX-LM3-180	DX-SIN3-180	P: 2x DX-SIN3-110-A
-	DILM250/22(RA250)	DX-EMC34-250	DX-EMC34-250-L	DX-LN3-250	2.5 %	DX-PHF34-217	DX-LM3-220	DX-SIN3-250	-
-	DILM300A/22(RA250)	DX-EMC34-250	DX-EMC34-250-L	DX-LN3-250	2.5 %	DX-PHF34-289	DX-LM3-260	DX-SIN3-250	-
-	DILM400/22(RA250)	DX-EMC34-400	DX-EMC34-400-L	DX-LN3-370	2.5 %	DX-PHF34-325	DX-LM3-303	DX-SIN3-480	-
-	DILM7-10(24VDC)	-	-	DX-LN3-004	4 %	-	-	-	-
-	DILM7-10(24VDC)	-	-	DX-LN3-006	4 %	-	-	-	-
-	DILM7-10(24VDC)	-	-	DX-LN3-006	4 %	-	-	-	-
-	DILM7-10(24VDC)	-	-	DX-LN3-010	4 %	-	-	-	-
-	DILM7-10(24VDC)	-	-	DX-LN3-016	4 %	-	-	-	-
-	DILM17-10(RDC24)	-	-	DX-LN3-016	4 %	-	-	-	-
-	DILM17-10(RDC24)	-	-	DX-LN3-025	4 %	-	-	-	-
-	DILM17-10(RDC24)	-	-	DX-LN3-040	2.5 %	-	-	-	-
-	DILM40(RDC24)	-	-	DX-LN3-040	2.5 %	-	-	-	-
-	DILM40(RDC24)	-	-	DX-LN3-040	2.5 %	-	-	-	-
-	DILM50(RDC24)	-	-	DX-LN3-050	2.5 %	-	-	-	-
-	DILM72(RDC24)	-	-	DX-LN3-080	2.5 %	-	-	-	-
-	DILM80(RDC24)	-	-	DX-LN3-080	2.5 %	-	-	-	-
-	DILM115(RDC24)	-	-	DX-LN3-100	2.5 %	-	-	-	-
-	DILM150(RDC24)	-	-	DX-LN3-160	2.5 %	-	-	-	-
-	DILM170(RDC24)	-	-	DX-LN3-160	2.5 %	-	-	-	-
-	DILM185A/22(RAC240)	-	-	DX-LN3-160	2.5 %	-	-	-	-

2.4

DA1 variable frequency drives up to 160 kW

General rated operational data

Technical specifications

	Symbol	Unit	Value
General			
Standards			EMC: EN 61800-3:2004+A1-2012 Radio interference: EN 55011: 2010 Security: EN 61800-5: 2007 Degree of protection: EN 60529: 1992
Certifications and manufacturer's declarations on conformity			CE, UL, cUL, c-Tick, UkrSEPRO, Gost-R
Production quality			RoHS, ISO 9001
Climatic proofing	pw	%	< 95%, average relative humidity (RH), non-condensing (EN 50178)
Ambient temperature			
Operation			
IP20 (NEMA 0)	θ	°C	-10 - +50 (frost-free and condensation-free)
IP55 (NEMA 3)	θ	°C	-10 - +40, with derating of 1.5% per °C above 40 °C on rated operational current I _e
			Notes Operation within a temperature range of 40 to 50 °C does not conform to UL listing.
IP66 (NEMA 4X)	θ	°C	-10 - +40, with derating of 2.5% per °C above 40 °C on rated operational current I _e
			Notes Operation within a temperature range of 40 to 50 °C does not conform to UL listing.
Storage	θ	°C	-40 - +60
MTTF _d		Years	4525
mtbf (mean time between two failures)		Years	50
PFH ₀			1.23 - 09 1/h (0.12% of SIL)
Electrostatic discharge (ESD, EN 61000-4-2:2009)	U	kV	±4, contact discharge ±8, air discharge
Fast transient burst (EFT/B, EN 61000-4-4: 2004)	U	kV	±1, at 5 kHz, control signal terminal ±2, at 5 kHz, motor connection terminals, Single-phase mains connection terminals ±4, at 5 kHz, three-phase mains connection terminals
Overvoltage (surge, EN 61000-4-5: 2006)			
110 - 115 V, 200 - 240 V	U	kV	±1, phase to phase/neutral conductor ±2, phase/neutral conductor to earth
380 - 480 V, 500 - 600 V	U	kV	±2, phase to phase ±4, phase to earth
Electric strength (flash, EN 61800-5-1: 2007)			
110 - 115 V, 200 - 240 V	U	kV	1.5
380 - 480 V, 500 - 600 V	U	kV	2.5
Radio interference class (EMC)			
Category and maximum screened motor cable length with integrated radio interference suppression filter			
C1	l	m	1
C2	l	m	5
C3	l	m	25
Mounting position			vertical
Altitude	h	m	0 - 1000 above sea level, > 1000 with 1% load current reduction every 100 m, maximum 2000 with UL approval, maximum 4000 without UL approval
Protection type			IP20 (NEMA 0) IP55 (NEMA 3) IP66 (NEMA 4X)
Fan (built-in)			Yes
Protection against contact			BGV A3 (VBG4, finger- and back-of-hand proof)

	Symbol	Unit	Value
Main circuit / power section			
Feeder			
Rated operating voltage			
DA1-12...	U_e	V	1~ 230 (200 V -10% - 240 V +10%)
DA1-32...	U_e	V	3~ 230 (200 V -10% - 240 V +10%)
DA1-34...	U_e	V	3~ 400 (380 V -10% - 480 V +10%)
DA1-35...	U_e	V	3~ 575 (500 V - 10% - 600 V +10%)
Mains frequency	f	Hz	50/60 ±10%
Phase imbalance		%	max. 3
Maximum short-circuit current (supply voltage)	SCCR	kA	100 (according to IEC 60439-1)
Mains switch-on frequency			Maximum of one time every 30 seconds
Mains network configuration (AC supply system)			TN and TT network with directly earthed neutral point. IT earthing systems with PCM insulation monitoring relays only. Operation on phase-earthed networks is only permissible up to a maximum phase-earth voltage of 300 V AC.
Motor feeder			
Output voltage			
DA1-12..., DA1-32..., DA1-34..., DA1-35...	U_2	V	3- 0 - U_e
Assigned motor output			
at 230 V, 50 Hz	P	kW	0.75 - 75
at 400 V, 50 Hz	P	kW	0.75 - 250
at 500 V, 60 Hz	P	kW	0.75 - 110
Output frequency			
Range, parameterizable	f_2	Hz	0 - 50/60 (max. 500 Hz)
Resolution	Δf	Hz	0.1
Rated operational current	I_e	A	IP20: 4.3- 72/370 - 450 IP55: 24 -302 IP66: 4.3 -18
Overload current for 60 s every 600 s	I_L	%	150
Starting current for 4 s every 40 s	I_L	%	200
Motor cable length			
screened	l	m	100
unscreened	l	m	150
with motor choke	Δl	%	100 (increased maximum cable length)
Switching frequency (pulse frequency)	f_{PWM}	kHz	4 - 32 (double modulation) / 2 - 16 (effective) Maximum value depends on rating
Operating mode			
SLV, max. speed error	Δn	%	±0.5
DC-braking			
Time before start	t	s	0 - 25, in the event of a stop
Motor pick-up control function (for catching spinning motors)			Yes
Brake chopper			Yes
Braking current during continuous operation	I_{BR}	%	100 (I_e)
Maximum braking current	I_{BRmax}	%	150 for 60 s

2.4

DA1 variable frequency drives up to 160 kW

General rated operational data

	Symbol	Unit	Value
Control section			
Terminal capacity (clampable)	A	mm ²	0.05 - 2.5 (30 - 12 AWG)
Control voltage			
Output voltage (control signal terminal 1)	U _c	V DC	24
Input voltage (control signal terminal 1)	U _c	V DC	18 - 30
Load rating (control signal terminal 1), maximum	I	mA	100
Reference voltage (control signal terminal 5)	U _s	V DC	10
Load rating (control signal terminal 5), maximum	I	mA	10
Digital Input (DI)			
Number (configurable)			3 - 5
Logic (level)			Increase
Time of reaction	t	ms	< 4
Input voltage range High (1)	U _c	V DC	8 - 30
Input voltage range Low (0)	U _c	V DC	0 - 4
Analog Input (AI)			
Number (configurable)			0 - 2
Resolution		Bit	12
Accuracy		%	< 1 to the final value
Time of reaction	t	ms	< 4
Input voltage range	U _{ref}	V	0/-10 - +10, DC (R _i ~ 72 kΩ)
Input current range	I	mA	0/4 - 20 (R _B ~ 500 Ω)
Setpoint potentiometer (recommended fixed resistance)	R	kΩ	1 - 10
Relay output (K)			
Number of relays (contacts)			2 (1 N/O/1 changeover contact)
Switching capacity			
AC	I	A	6 (250 V)
DC	I	A	5 (30 V)
Digital/analog output (DO/AO)			
Qty.			2 (digital/analog)
Output voltage			
TH	U _{out}	V DC	+24
AO	U _{out}	V DC	0/-10 - +10
Current carrying capacity DO	I _{out}	mA	< 20
AO resolution		Bit	12
Interface (RJ45)			
			OP bus, Modbus RTU, CANopen, (RS485)
STO (Safe Torque Off)			
Voltage	U	V DC	+24 (18 - 30)
Current	I	mA	100
SIL category			2
PL			d

Size	Symbol	Unit	4D3	7D0	011	
DA1-12... series						
Rated operational current	I_e	A	4.3	7.0	10.5	
Overload current for 60 s every 600 s	I_L	A	6.45	10.5	15.75	
Apparent power at rated operation	230 V	S	kVA	1.71	2.79	4.18
	240 V	S	kVA	1.79	2.91	4.36
Assigned motor power	230 V	P	kW	0.75	1.5	2.2
	230 V	P	HP	1	2	3
Power side (primary side):						
Number of phases	single-phase or two-phase					
Device voltage rating	U_{LN}	V	200 - 10% - 240 + 10%, 50/60 Hz (180 - 264 ±0%, 48 - 62 Hz ±0%)			
Input current (phase current)	I_{LN}	A	8.5	15.2	19.5	
Minimum braking resistance	R_B	Ω	100	50	35	
Switching frequency (pulse frequency)						
Default settings	f_{PWM}	kHz	16	16	16	
Setting range	f_{PWM}	kHz	4 - 32	4 - 32	4 - 32	
Maximum leakage current to earth (PE), without motor	I_{PE}	mA	2.49	2.49	2.49	
Efficiency	η		0.94	0.96	0.95	
Heat dissipation at I_e	P_V	W	45.75	63	103.4	
Frame size			FS2	FS2	FS2	

Size	Symbol	Unit	4D3	7D0	011	018	024	024	
DA1-32... series									
Rated operational current	I_e	A	4.3	7.0	10.5	18	24	24	
Overload current for 60 s every 600 s	I_L	A	6.45	10.5	15.75	27	36	36	
Apparent power at rated operation	230 V	S	kVA	1.71	2.79	4.18	7.17	9.56	9.56
	240 V	S	kVA	1.79	2.91	4.36	7.48	9.98	9.98
Assigned instance motor power	230 V	P	kW	0.75	1.5	2.2	4.0	5.5	5.5
	230 V	P	HP	1	2	3	5	7.5	7.5
Power side (primary side):									
Number of phases	three-phase								
Rated operating voltage	U_{LN}	V	200 - 10% - 240 + 10%, 50/60 Hz (180 - 264 ±0%, 48 - 62 Hz ±0%)						
Input current (phase current)	I_{LN}	A	5.1	8.3	12.6	21.6	29.1	29.1	
Minimum braking resistance	R_B	Ω	100	50	35	20	20	20	
Switching frequency (pulse frequency)									
Default settings	f_{PWM}	kHz	16	16	16	16	16	16	
Setting range	f_{PWM}	kHz	4 - 32	4 - 32	4 - 32	4 - 32	4 - 16	4 - 16	
Maximum leakage current to earth (PE), without motor	I_{PE}	mA	1.73	1.73	1.73	0.93	0.93	1.42	
Efficiency	η		0.95	0.96	0.96	0.96	0.97	0.97	
Heat dissipation at I_e	P_V	W	39.75	61.5	90.2	160	170.5	170.5	
Frame size			FS2	FS2	FS2	FS3	FS3	FS4	

2.4

DA1 variable frequency drives up to 160 kW

Specific rated operational data

Size	Symbol	Unit	030	046	061	072	090	110	
DA1-32... series									
Rated operational current	I_e	A	30	46	61	72	90	110	
Overload current for 60 s every 600 s at 50 °C	I_L	A	58.5	69	91.5	108	135	165	
Apparent power at rated operation	230 V	S	kVA	15.5	18.3	24.3	28.7	35.9	43.8
	240 V	S	kVA	16.2	19.1	25.4	29.9	37.4	45.7
Assigned instance motor power	230 V	P	kW	7.5	11	15	18.5	22	30
	230 V	P	HP	10	15	20	25	30	40
Power side (primary side):									
Number of phases	three-phase								
Rated operating voltage	U_{LN}	V	200 V (-10%) - 240 V (+10%), 50/60 Hz (180 - 264 V $\pm 0\%$, 48 - 62 Hz $\pm 0\%$)						
Input current (phase current)	I_{LN}	A	36.4	55.8	70.2	82.9	103.6	126.7	
Minimum braking resistance	R_B	Ω	22	22	12	12	6	6	
Switching frequency									
Default settings	f_{PWM}	kHz	8	8	8	8	8	4	
Setting range	f_{PWM}	kHz	4 - 24	4 - 24	4 - 24	4 - 24	4 - 24	4 - 16	
Maximum leakage current to earth (PE), without motor	IPE	mA	1.42	1.42	0.28	0.28	1.54	1.54	
Efficiency	η		0.97 (IP55) 0.96 (IP20)	0.97	0.97	0.97	0.97	0.97	
Heat dissipation at I_e	P_V	W	187.5 (IP55) 410 (IP20)	264	345	518	550	720	
Frame size			FS4	FS4	FS5	FS5	FS6	FS6	

Size	Symbol	Unit	150	180	202	248	
DA1-32... series							
Rated operational current	I_e	A	150	180	202	248	
Overload current for 60 s every 600 s	I_L	A	225	270	303	372	
Apparent power at rated operation	230 V	S	kVA	59.8	71.7	80.5	98.8
	240 V	S	kVA	62.4	74.8	84	103.1
Assigned instance motor power	230 V	P	kW	37	45	55	75
	230 V	P	HP	50	60	75	100
Power side (primary side):							
Number of phases	three-phase						
Rated operating voltage	U_{LN}	V	200 V (-10%) - 240 V (+10%), 50/60 Hz (180 - 264 V $\pm 0\%$, 48 - 62 Hz $\pm 0\%$)				
Input current (phase current)	I_{LN}	A	172.7	183.3	205.7	255.5	
Minimum braking resistance	R_B	Ω	6	6	6	6	
Switching frequency (pulse frequency)							
Default settings	f_{PWM}	kHz	4	4	4	4	
Setting range	f_{PWM}	kHz	4 - 12	4 - 8	4 - 16	4 - 12	
Maximum leakage current to earth (PE), without motor	I_{PE}	mA	1.54	1.54	2.74	2.74	
Efficiency	η		0.97	0.98	0.98	0.98	
Heat dissipation at I_e	P_V	W	814	945	1100	1425	
Frame size			FS6	FS6	FS7	FS7	

Size	Symbol	Unit	2D2	4D1	5D8	9D5	014	018	024
DA1-34... series									
Rated operational current	I_e	A	2.2	4.1	5.8	9.5	14	18	24
Overload current for 60 s every 600 s	I_L	A	3.3	6.15	8.7	14.25	21	27	36
Apparent power at rated operation	400 V	S	kVA	1.52	2.84	4.02	6.58	9.7	12.5
	480 V	S	kVA	1.83	3.41	4.8	7.9	11.6	15
Assigned instance motor power	400 V	P	kW	0.75	1.5	2.2	4.0	5.5	7.5
	460 V	P	HP	1	2	3	5	7.5	10
Power side (primary side):									
Number of phases	three-phase								
Rated operating voltage	U_{LN}	V	380 V (-10%) - 480 V (+10%), 50/60 Hz (342 - 528 V $\pm 0\%$, 48 - 62 Hz $\pm 0\%$)						
Input current (phase current)	I_{LN}	A	2.4	5.1	7.5	11.2	19	22	28.9
Minimum braking resistance	R_B	Ω	400	200	150	100	75	50	40
Switching frequency (pulse frequency)									
Default settings	f_{PWM}	kHz	8	8	8	8	8	8	8
Setting range	f_{PWM}	kHz	4 - 32	4 - 32	4 - 32	4 - 32	4 - 24	4 - 24	4 - 16
Maximum leakage current to earth (PE), without motor	I_{PE}	mA	4.65	4.65	4.65	4.65	1.55	1.55	1.55
Efficiency	η		0.92	0.95	0.95	0.96	0.96	0.97	0.97
Heat dissipation at I_e	P_V	W	63.75	76.5	101.2	136	209	300	297
Frame size			FS2	FS2	FS2	FS2	FS3	FS3	FS3

Size	Symbol	Unit	024	030	039	046	061	072	090
DA1-34... series									
Rated operational current	I_e	A	24	30	39	46	61	72	90
Overload current for 60 s every 600 s	I_L	A	36	45	58.5	69	91.5	108	135
Apparent power at rated operation	400 V	S	kVA	16.6	20.8	27	31.9	42.3	49.9
	480 V	S	kVA	20	24.9	32.4	38.2	50.7	59.9
Assigned instance motor power	400 V	P	kW	11	15	18.5	22	30	37
	460 V	P	HP	15	20	25	30	40	50
Power side (primary side):									
Number of phases	three-phase								
Rated operating voltage	U_{LN}	V	380 V (-10%) - 480 V (+10%), 50/60 Hz (342 - 528 V $\pm 0\%$, 48 - 62 Hz $\pm 0\%$)						
Input current (phase current)	I_{LN}	A	28.9	37.2	47	52.4	66.1	77.3	92.2
Minimum braking resistance	R_B	Ω	40	22	22	22	12	12	6
Switching frequency (pulse frequency)									
Default settings	f_{PWM}	kHz	8	8	8	8	8	8	4
Setting range	f_{PWM}	kHz	4 - 16	4 - 24	4 - 24	4 - 24	4 - 24	4 - 24	4 - 16
Maximum leakage current to earth (PE), without motor	I_{PE}	mA	2.47	2.47	2.47	2.47	0.49	0.49	2.68
Efficiency	η		0.97	0.97	0.97	0.97	0.97	0.97	0.97
Heat dissipation at I_e	P_V	W	297	375	444	506	840	925	1080
Frame size			FS4	FS4	FS4	FS4	FS5	FS5	FS6

2.4

DA1 variable frequency drives up to 160 kW

Specific rated operational data

Size	Symbol	Unit	110	150	180	202	240	302	
DA1-34... series									
Rated operational current	I_e	A	110	150	180	202	240	302	
Overload current for 60 s every 600 s	I_L	A	165	225	270	303	360	453	
Apparent power at rated operation	400 V	S	kVA	76.2	104	125	140	166	209
	480 V	S	kVA	91.5	125	150	168	200	251
Assigned instance motor power	400 V	P	kW	55	75	90	110	132	160
	460 V	P	HP	75	120	150	175	200	250
Power side (primary side):									
Number of phases	three-phase								
Rated operating voltage	U_{LN}	V	380 V (-10%) - 480 V (+10%), 50/60 Hz (342 - 528 V $\pm 0\%$, 48 - 62 Hz $\pm 0\%$)						
Input current (phase current)	I_{LN}	A	112.5	153.2	183.7	217	256	302	
Minimum braking resistance	R_B	Ω	6	6	6	6	6	6	
Switching frequency (pulse frequency)									
Default settings	f_{PWM}	kHz	4	4	4	4	4	4	
Setting range	f_{PWM}	kHz	4 - 16	4 - 12	4 - 8	4 - 16	4 - 12	4 - 8	
Maximum leakage current to earth (PE), without motor	I_{PE}	mA	2.68	2.68	2.68	4.75	4.75	4.75	
Efficiency	η		0.98	0.98	0.98	0.98	0.98	0.98	
Heat dissipation at I_e	P_V	W	1210	1575	1800	2090	2375	3040	
Frame size			FS6	FS6	FS6	FS7	FS7	FS7	

Size	Symbol	Unit	2D1	3D1	4D1	6D5	9D0	012	
DA1-35... series									
Rated operational current	I_e	A	2.1	3.1	4.1	6.5	9	12	
Overload current for 60 s every 600 s at 50 °C	I_L	A	3.15	4.65	6.15	9.75	13.5	18	
Apparent power at rated operation	500 V	S	kVA	1.6	2.1	2.4	4.3	6	7.5
	600 V	S	kVA	2	2.5	2.9	5.1	7.3	9
Assigned instance motor power	500 V	P	kW	0.75	1.5	2.2	4	5.5	7.5
	575 V	P	HP	1	2	3	5	7.5	10
Power side (primary side):									
Number of phases	three-phase								
Rated operating voltage	U_{LN}	V	500 V (-10%) - 600 V (+10%), 50/60 Hz						
Input current (phase current)	I_{LN}	A	2.5	3.7	4.9	7.8	10.8	14.4	
Minimum braking resistance	R_B	Ω	50	50	50	50	50	40	
Switching frequency (pulse frequency)									
Default settings	f_{PWM}	kHz	8	8	8	8	8	8	
Setting range	f_{PWM}	kHz	4 - 24	4 - 24	4 - 24	4 - 24	4 - 24	4 - 24	
Maximum leakage current to earth (PE), without motor	I_{PE}	mA	–	–	–	–	–	–	
Efficiency	η		0.97	0.97	0.97	0.97	0.97	0.97	
Heat dissipation at I_e	P_V	W	22.5	45	66	120	165	225	
Frame size			FS2	FS2	FS2	FS2	FS2	FS3	

Size	Symbol	Unit	017	022	022	028	034	043	
DA1-35... series									
Rated operational current	I_b	A	17	22	22	28	34	43	
Overload current for 60 s every 600 s	I_L	A	25.5	33	33	42	51	64.5	
Apparent power at rated operation	500 V	S	kVA	10.4	12.7	12.7	16	19.5	24.4
	600 V	S	kVA	12.5	15.2	15.5	19.3	23.4	29.3
Assigned instance motor power	500 V	P	kW	11	15	15	18.5	22	30
	575 V	P	HP	15	20	20	25	30	40
Power side (primary side):									
Number of phases	three-phase								
Rated operating voltage	U_{LN}	V	500 V (-10%) - 600 V (+10%), 50/60 Hz						
Input current (phase current)	I_{LN}	A	20.6	26.7	26.7	34	41.2	53	
Minimum braking resistance	R_B	Ω	40	40	22	22	22	22	
Switching frequency (pulse frequency)									
Default settings	f_{PWM}	kHz	8	8	8	8	8	8	
Setting range	f_{PWM}	kHz	24	24	24	24	24	24	
Maximum leakage current to earth (PE), without motor	I_{PE}	mA	–	–	–	–	–	–	
Efficiency	η		0.97	0.97	0.97	0.97	0.97	0.97	
Heat dissipation at I_b	P_V	W	330	450	450	555	660	850	
Frame size			FS3	FS3	FS4	FS4	FS4	FS4	

Size	Symbol	Unit	054	065	078	105	130	150	
DA1-35... series									
Rated operational current	I_b	A	54	65	78	105	130	150	
Overload current for 60 s every 600 s	I_L	A	81	97.5	117	157.5	195	225	
Apparent power at rated operation	500 V	S	kVA	29.7	35.2	45.2	60.5	71.5	79.1
	600 V	S	kVA	35.6	42.2	54.3	72.6	85.9	95
Assigned instance motor power	500 V	P	kW	37	45	55	75	90	110
	575 V	P	HP	50	60	75	100	125	150
Power side (primary side):									
Number of phases	three-phase								
Rated operating voltage	U_{LN}	V	500 V (-10%) - 600 V (+10%), 50/60 Hz						
Input current (phase current)	I_{LN}	A	62.2	75.8	90.9	108.2	162	187	
Minimum braking resistance	R_B	Ω	12	12	6	6	6	6	
Switching frequency (pulse frequency)									
Default settings	f_{PWM}	kHz	8	8	4	4	4	4	
Setting range	f_{PWM}	kHz	4 - 24	4 - 24	4 - 16	4 - 16	4 - 12	4 - 12	
Maximum leakage current to earth (PE), without motor	I_{PE}	mA	–	–	–	–	–	–	
Efficiency	η		0.97	0.97	0.97	0.97	0.97	0.97	
Heat dissipation at I_b	P_V	W	1110	1350	1650	2250	2700	3300	
Frame size			FS5	FS5	FS6	FS6	FS6	FS6	


2.4

DA1 variable frequency drives up to 160 kW

Dimensions and weights


Dimensions and weights

Frame sizes FS2, FS3, FS4 and FS5 in IP20

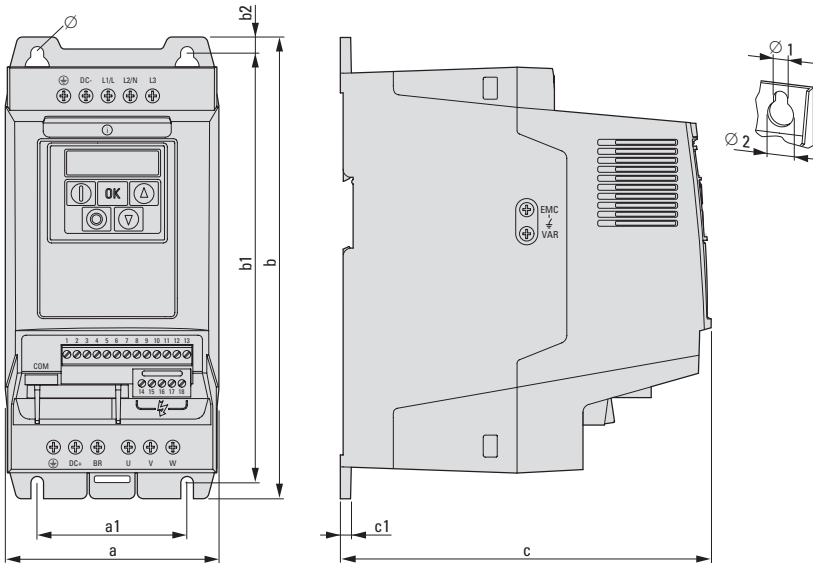

Size	a	a1	b	b1	b2	c	c1	Ø1	Ø2	m
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
FS2	107	75	231	215	8	186	5	6.5	12.2	1.8
FS3	131	100	273	255	8.5	204	5	6.5	12.2	3.5
FS4	173	125	419	400	10	241	5	8	15	9.2
FS5	234	175	485	460	13	261	5	8	18	18.2


Frame sizes FS4 to FS7 in IP55

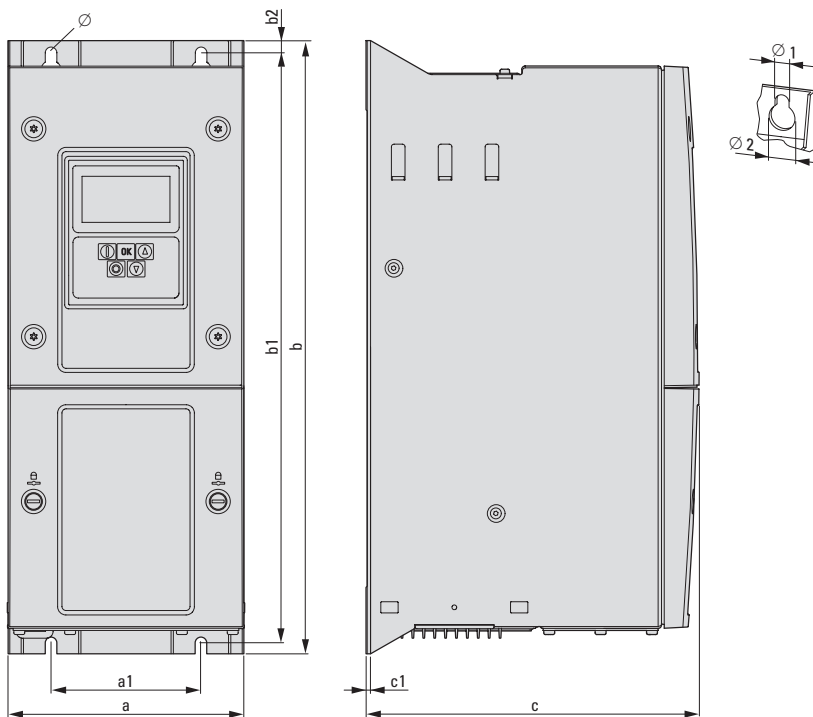


Frame size	a	a1	b	b1	b2	c	c1	Ø1	Ø2	m
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
FS4	171	110	450	433	9	240	2	8	15	11.5
FS5	235	175	540	520	12	270	2	8	15	22.5
FS6	330	200	865	840	15	313.5	2	11	22	50
FS7	330	200	1280	1255	15	341	2	11	22	80

Frame sizes FS2, FS3 and FS4 in IP66


FS2

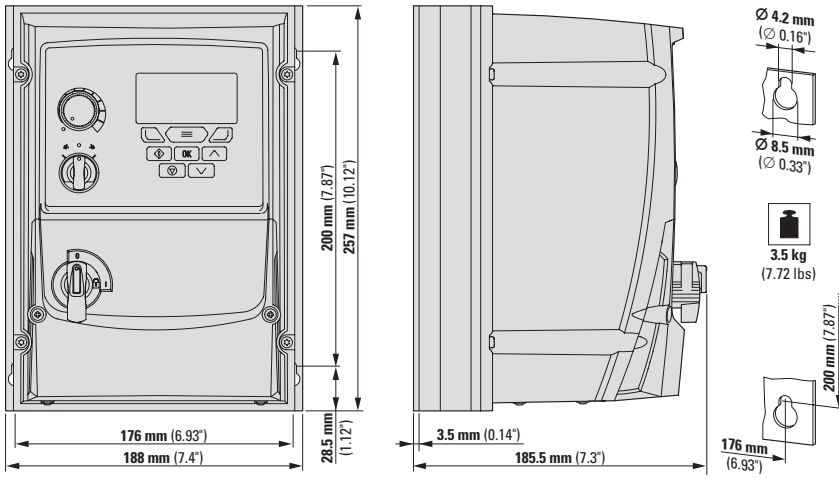

FS3

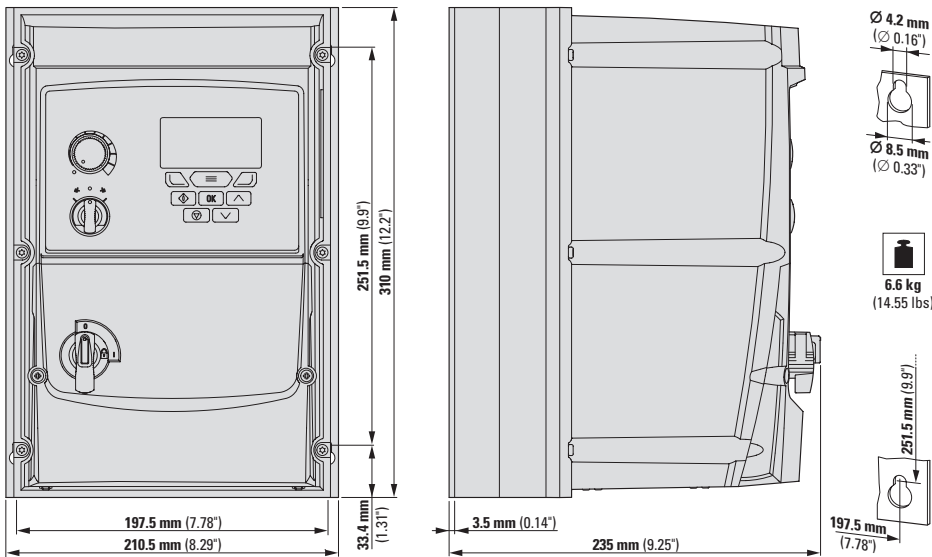

FS4

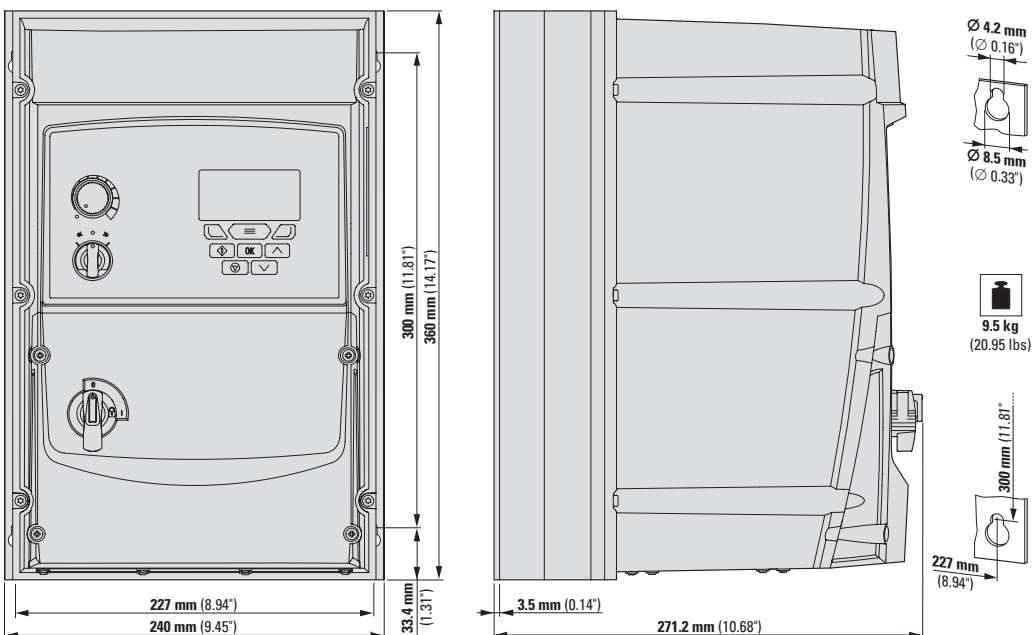



PowerXL DM1 and DM1 Pro variable frequency drives (General Purpose Drives)

PowerXL DM1 variable frequency drives take a high level of functionality and put it in an extremely compact space. They are the perfect choice for applications in which space is at a premium but the full functionality of a standard

universal variable frequency drive is still required, with examples including pump functions, HVAC functions, and controlling common motors such as asynchronous motors and permanent magnet motors.

DM1

Performance range:

- 0.25 - 1.5 kW (115 V)
- 0.55 - 15 kW (230 V)
- 0.75 - 22 kW (400 V)
- 5 - 25 HP (575 V)

Applications:

- Multi-pump applications
- Booster pumps
- Sprinklers
- Supply and exhaust fans
- Chain conveyors, roller and chain conveyors
- Compressors
- Screw conveyors
- Centrifuges
- Sawing and drilling
- Water jet cutters

Features:

- The integrated web server makes it possible to configure and control devices without having to install additional software.
- PowerXpert inControl can communicate with the DM1 via Bluetooth without having to open the control cabinet.
- For booster pump systems in which multiple pumps run as a group, the DM1 provides all the basic functions for adding and removing pumps to and from the group and for ensuring that all pumps are controlled uniformly.
- IP20 degree of protection with optional IP21/NEMA1 kit. Ambient temperature as low as -30 °C with cold-weather functionality and as high as +50 °C (+60 °C with derating).
- Integrated energy measurement and energy cost calculator
- No additional upstream devices (such as a mains choke) are required for short-circuit protection up to 100 kA. The short-circuit current that can be reached depends exclusively on the protective device used.

Accessory:

- PROFINET connection
- PROFIBUS connection
- CANopen connection
- IP21 / NEMA1 kit
- DG1-remote keypad

For more information, visit:
Eaton.com/dm1



2.5 DM1 variable frequency drives up to 22 kW


System overview	174
Key to type references	175
Ordering	176
DM1 for three-phase motors 230 V, three-phase	176
DM1 for three-phase motors 400 V, three-phase	177
DM1 Pro for three-phase motors 115 V/230 V, single-phase	178
DM1 Pro for three-phase motors 230 V, three-phase	179
DM1 Pro for three-phase motors 400 V, three-phase	180
DM1 Pro for three-phase motors, 575 V, three-phase	181
Accessories	182
Engineering	184
Assigned switching and protective elements for DM1	184
Connection examples	188
Technical specifications	189
Dimensions	191

2.5

DM1 variable frequency drives up to 22 kW

System overview

System overview

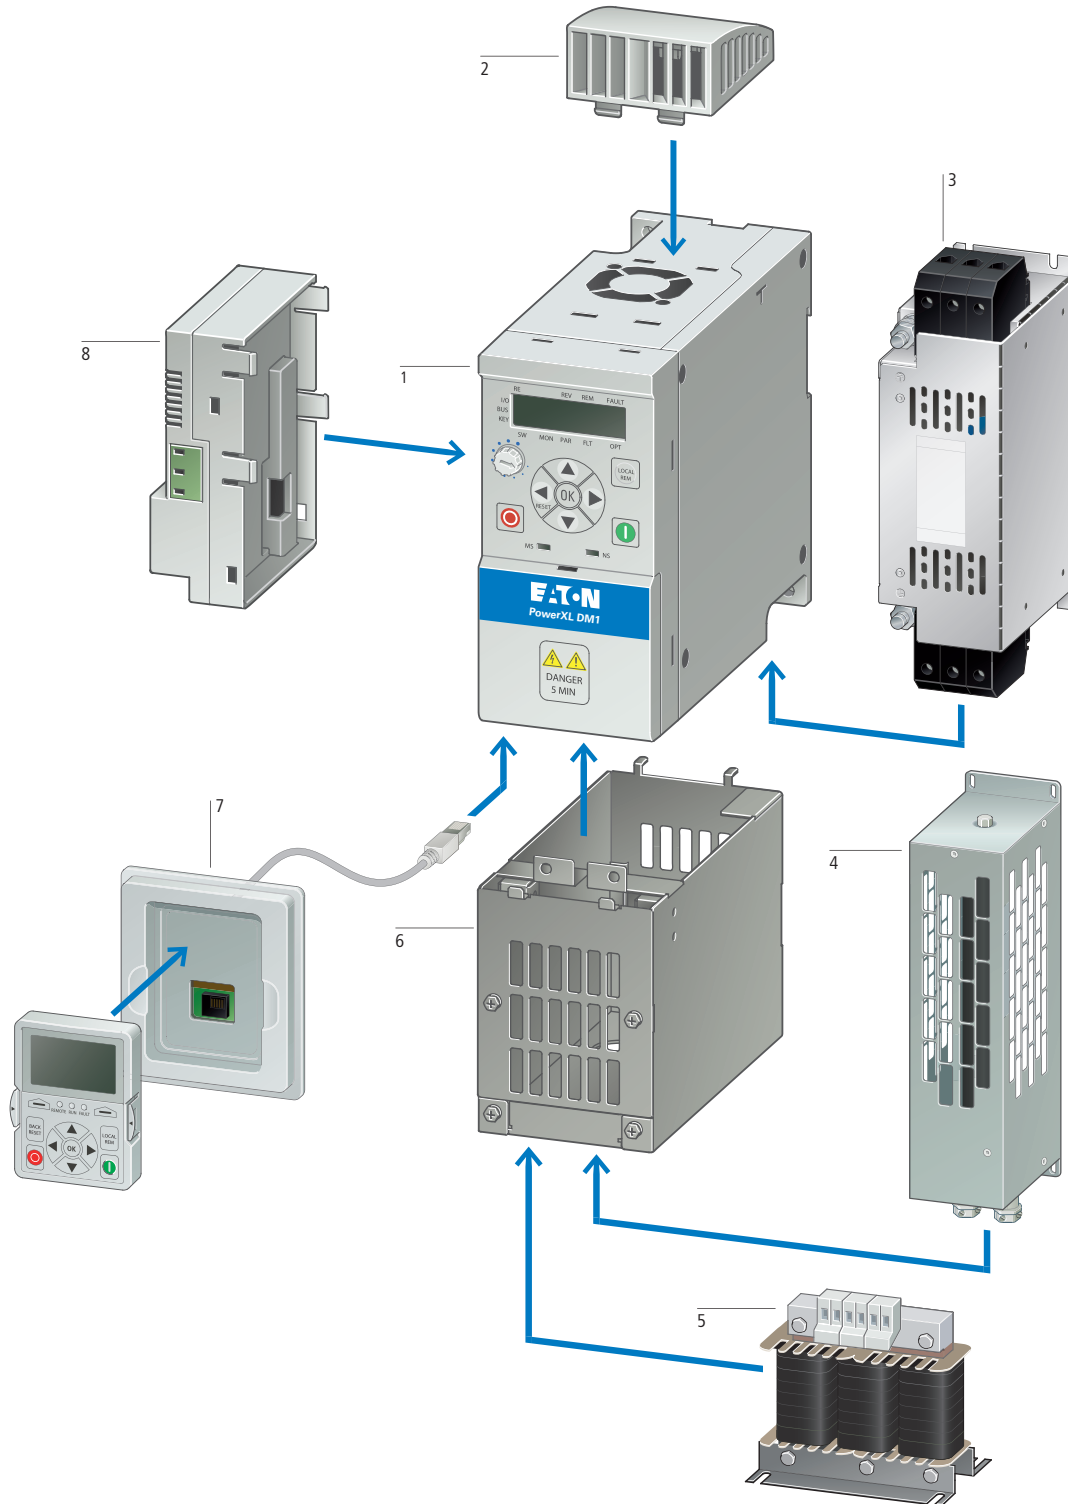

DM1


DM1 / DM1 Pro	1
→ Page 176	
NEMA1 / IP21 kits DXM-ACC...	2
→ Page 182	
EMC filter DX-EMC...	3
→ Page 256	

Braking resistances DX-BR...	4
→ Page 261	
Mains chokes DX-LN...	5
Motor chokes DX-LM...	
Harmonic filters DX-PHF...	
→ Page 254	
→ Page 258	
→ Page 255	

NEMA1 kits DXM-ACC-FRxN1...	6
→ Page 182	
Remote keypad kit DXG-KEY-RMTKIT	7
→ Page 182	
Communication cards DXM-NET...	8
→ Page 182	

Key to type references

DM1 - 3 4 4D3 E B - S 20 S - EM

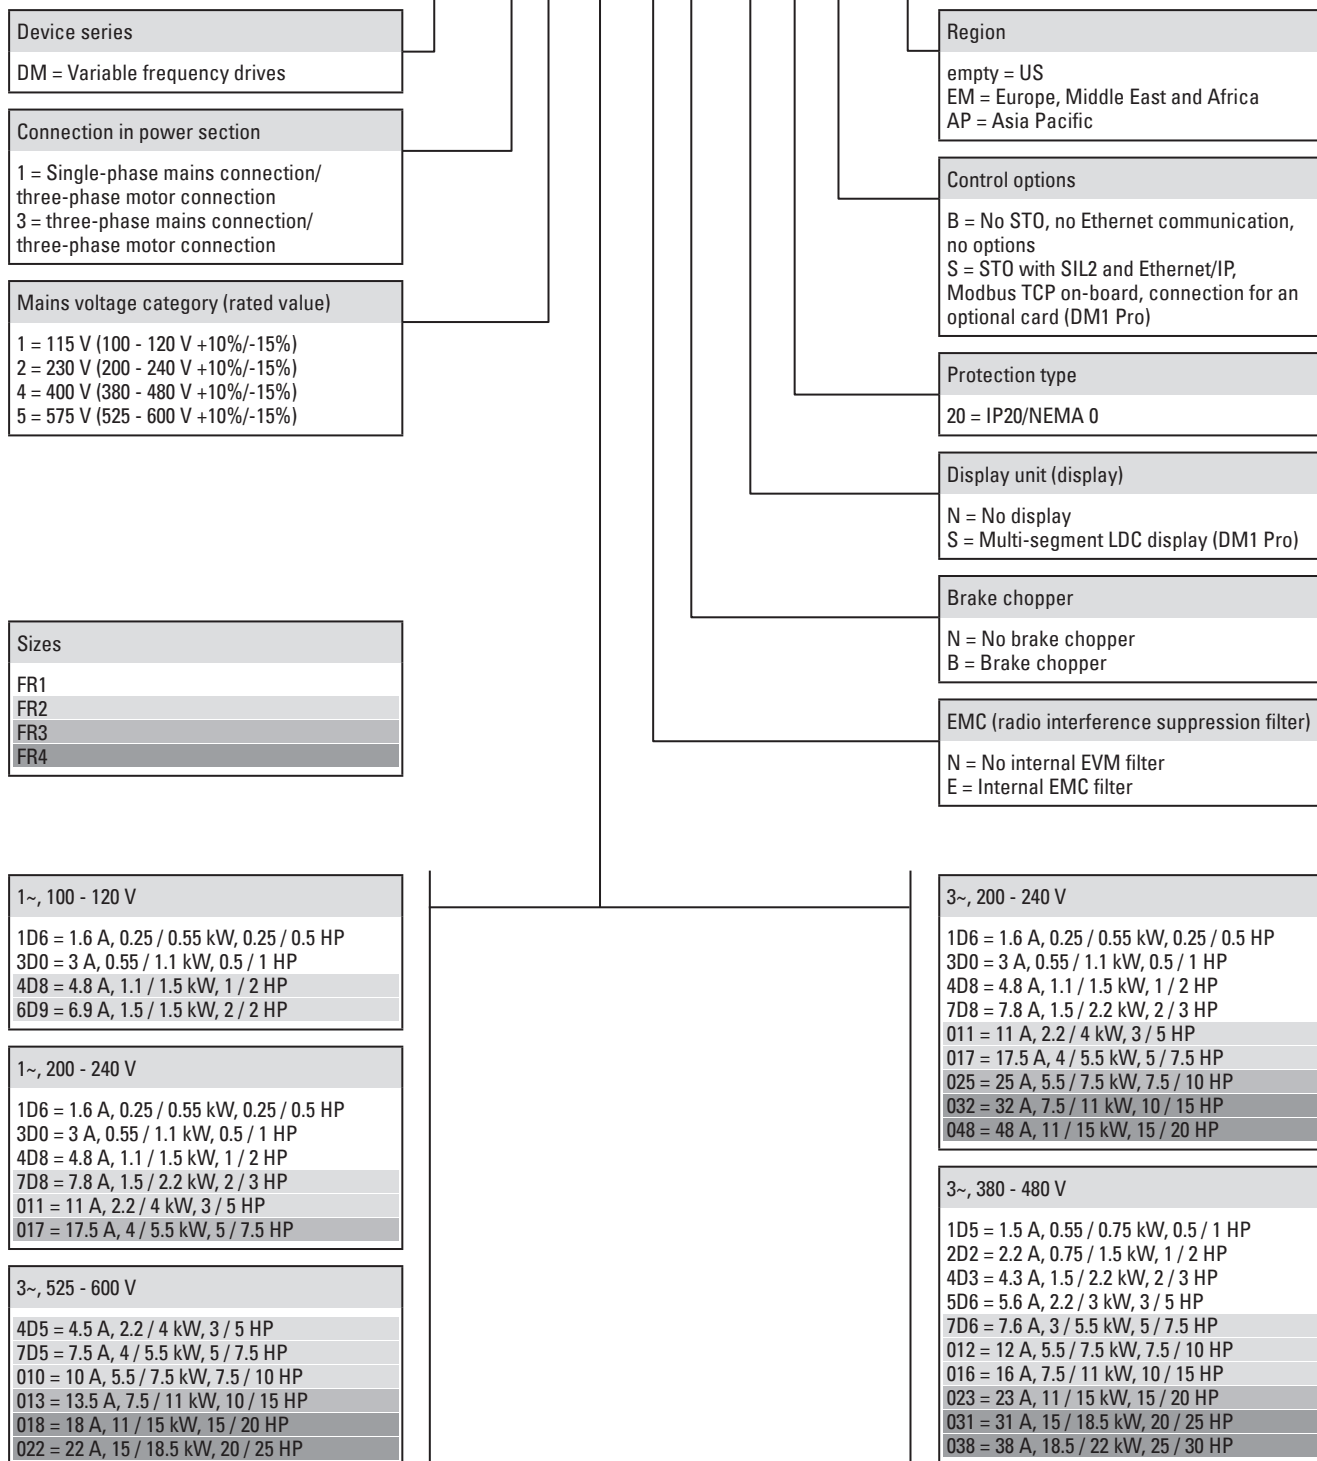

Power specifications are for a 150%/110% overload cycle. In the case of a 110% overload cycle, the permissible ambient temperature is reduced to +40 °C.

DM1

2.5

DM1 variable frequency drives up to 22 kW

DM1 for three-phase motors 230 V, three-phase

Ordering

Rated operation current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operation current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW		HP	$I_n = 110\%$ I_e A						kW	HP
U_e 230 V AC, three-phase / U₂ 230 V AC, three-phase, without EMC filter												
Mains voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
1.6	0.25	0.25	3	0.55	0.5	-	✓	-	FS1	IP20/NEMA0	DM1-321D6NB-N20B-EM 3-5018-005A	1 unit
3	0.55	0.5	4.8	1.1	1	-	✓	-			DM1-323D0NB-N20B-EM 3-5018-006A	
4.8	1.1	1	7.8	1.5	2	-	✓	-			DM1-324D8NB-N20B-EM 3-5018-007A	
7.8	1.5	2	11	2.2	3	-	✓	-			DM1-327D8NB-N20B-EM 3-5018-008A	
11	2.2	3	17.5	4	5	-	✓	-	FS2		DM1-32011NB-N20B-EM 3-5020-003A	
17.5	4	5	25	5.5	7.5	-	✓	-			DM1-32017NB-N20B-EM 3-5020-004A	
25	5.5	7.5	32	7.5	10	-	✓	-	FS3		DM1-32025NB-N20B-EM 3-5022-002A	
32	7.5	10	48	11	15	-	✓	-	FS4		DM1-32032NB-N20B-EM 3-5024-003A	
48	11	15	61	15	20	-	✓	-			DM1-32048NB-N20B-EM 3-5024-004A	
U_e 230 V AC, three-phase / U₂ 230 V AC, three-phase, with EMC filter												
Mains voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
1.6	0.25	0.25	3	0.55	0.5	✓	✓	-	FS1	IP20/NEMA0	DM1-321D6EB-N20B-EM 3-5017-005A	1 unit
3	0.55	0.5	4.8	1.1	1	✓	✓	-			DM1-323D0EB-N20B-EM 3-5017-006A	
4.8	1.1	1	7.8	1.5	2	✓	✓	-			DM1-324D8EB-N20B-EM 3-5017-007A	
7.8	1.5	2	11	2.2	3	✓	✓	-			DM1-327D8EB-N20B-EM 3-5017-008A	
11	2.2	3	17.5	4	5	✓	✓	-	FS2		DM1-32011EB-N20B-EM 3-5019-003A	
17.5	4	5	25	5.5	7.5	✓	✓	-			DM1-32017EB-N20B-EM 3-5019-004A	
25	5.5	7.5	32	7.5	10	✓	✓	-	FS3		DM1-32025EB-N20B-EM 3-5021-002A	
32	7.5	10	48	11	15	✓	✓	-	FS4		DM1-32032EB-N20B-EM 3-5023-003A	
48	11	15	61	15	20	✓	✓	-			DM1-32048EB-N20B-EM 3-5023-004A	

Notes

- ¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

DM1

DM1 variable frequency drives up to 22 kW

2.5

DM1 for three-phase motors 400 V, three-phase

Rated operation current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operation current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW HP		$I_n = 110\%$ I_e A	kW HP						Radio interference suppression filter	Brake chopper
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, without EMC filter												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
1.5	0.55	0.5	2.2	0.75	1	-	✓	-	FS1	IP20/NEMA0	DM1-341D5NB-N20B-EM 3-5026-005A	1 unit
2.2	0.75	1	4.3	1.5	2	-	✓	-			DM1-342D2NB-N20B-EM 3-5026-006A	
4.3	1.5	2	5.6	2.2	3 ⁴⁾	-	✓	-			DM1-344D3NB-N20B-EM 3-5026-007A	
5.6	2.2	3	7.6	3	5	-	✓	-			DM1-345D6NB-N20B-EM 3-5026-008A	
7.6	3	5	12	5.5	7.5	-	✓	-	FS2		DM1-347D6NB-N20B-EM 3-5028-004A	
12	5.5	7.5	16	7.5	10	-	✓	-			DM1-34012NB-N20B-EM 3-5028-005A	
16	7.5	10	23	11	15	-	✓	-			DM1-34016NB-N20B-EM 3-5028-006A	
23	11	15	31	15	20	-	✓	-	FS3		DM1-34023NB-N20B-EM 3-5030-002A	
31	15	20	38	18.5	25	-	✓	-	FS4		DM1-34031NB-N20B-EM 3-5032-003A	
38	18.5	25	46	22	30	-	✓	-			DM1-34038NB-N20B-EM 3-5032-004A	
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, with EMC filter												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
1.5	0.55	0.5	2.2	0.75	1	✓	✓	-	FS1	IP20/NEMA0	DM1-341D5EB-N20B-EM 3-5025-005A	1 unit
2.2	0.75	1	4.3	1.5	2	✓	✓	-			DM1-342D2EB-N20B-EM 3-5025-006A	
4.3	1.5	2	5.6	2.2	3	✓	✓	-			DM1-344D3EB-N20B-EM 3-5025-007A	
5.6	2.2	3	7.6	3 ⁴⁾	5	✓	✓	-			DM1-345D6EB-N20B-EM 3-5025-008A	
7.6	3	5	12	5.5	7.5	✓	✓	-	FS2		DM1-347D6EB-N20B-EM 3-5027-004A	
12	5.5	7.5	16	7.5	10	✓	✓	-			DM1-34012EB-N20B-EM 3-5027-005A	
16	7.5	10	23	11	15	✓	✓	-			DM1-34016EB-N20B-EM 3-5027-006A	
23	11	15	31	15	20	✓	✓	-	FS3		DM1-34023EB-N20B-EM 3-5029-002A	
31	15	20	38	18.5	25	✓	✓	-	FS4		DM1-34031EB-N20B-EM 3-5031-003A	
38	18.5	25	46	22	30	✓	✓	-			DM1-34038EB-N20B-EM 3-5031-004A	

Notes

- ¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz
- ⁴⁾ Output VT 4 kW 8.4 A at 400 V three-phase 10.1 A Input.

DM1

2.5

DM1 variable frequency drives up to 22 kW

DM1 Pro for three-phase motors 115 V/230 V, single-phase

Rated operation current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operation current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW		HP	$I_n = 110\%$ I_e A						kW	HP
U_e 115 V AC, single-phase / U_2 230 V AC, three-phase, without EMC filter												
Mains voltage (50/60Hz) U_{LN} : 100 (-15%) - 120 (+10%) V												
1.6	0.25	0.25	3	0.55	0.5	-	✓	✓	FS1	IP20/NEMA0	DM1-111D6NB-S20S-EM 3-5042-003A	1 unit
3	0.55	0.5	4.8	1.1	1	-	✓	✓			DM1-113D0NB-S20S-EM 3-5042-004A	
4.8	1.1	1	6.9	1.5	2	-	✓	✓	FS2		DM1-114D8NB-S20S-EM 3-5044-003A	
6.9	1.5	2	7.8	1.5	2	-	✓	✓			DM1-116D9NB-S20S-EM 3-5044-004A	
U_e 115 V AC, single-phase / U_2 230 V AC, three-phase, with EMC filter												
Mains voltage (50/60Hz) U_{LN} : 100 (-15%) - 120 (+10%) V												
1.6	0.25	0.25	3	0.55	0.5	✓	✓	✓	FS1	IP20/NEMA0	DM1-111D6EB-S20S-EM 3-5041-003A	1 unit
3	0.55	0.5	4.8	1.1	1	✓	✓	✓			DM1-113D0EB-S20S-EM 3-5041-004A	
4.8	1.1	1	6.9	1.5	2	✓	✓	✓	FS2		DM1-114D8EB-S20S-EM 3-5043-003A	
6.9	1.5	2	7.8	1.5	2	✓	✓	✓			DM1-116D9EB-S20S-EM 3-5043-004A	
U_e 230 V AC, single-phase / U_2 230 V AC, three-phase, without EMC filter												
Mains voltage (50/60Hz) U_{LN} : 200 (-15%) - 240 (+10%) V												
1.6	0.25	0.25	3	0.55	0.5	-	✓	✓	FS1	IP20/NEMA0	DM1-121D6NB-S20S-EM 3-5046-004A	1 unit
3	0.55	0.5	4.8	1.1	1	-	✓	✓			DM1-123D0NB-S20S-EM 3-5046-005A	
4.8	1.1	1	7.8	1.5	2	-	✓	✓			DM1-124D8NB-S20S-EM 3-5046-006A	
7.8	1.5	2	11	2.2	3	-	✓	✓	FS2		DM1-127D8NB-S20S-EM 3-5048-003A	
11	2.2	3	17.5	4	5	-	✓	✓			DM1-12011NB-S20S-EM 3-5048-004A	
17.5	4	5	25	5.5	7.5	-	✓	✓	FS3		DM1-12017NB-S20S-EM 3-5050-002A	
U_e 230 V AC, single-phase / U_2 230 V AC, three-phase, with EMC filter												
Mains voltage (50/60Hz) U_{LN} : 200 (-15%) - 240 (+10%) V												
1.6	0.25	0.25	3	0.55	0.5	✓	✓	✓	FS1	IP20/NEMA0	DM1-121D6EB-S20S-EM 3-5045-004A	1 unit
3	0.55	0.5	4.8	1.1	1	✓	✓	✓			DM1-123D0EB-S20S-EM 3-5045-005A	
4.8	1.1	1	7.8	1.5	2	✓	✓	✓			DM1-124D8EB-S20S-EM 3-5045-006A	
7.8	1.5	2	11	2.2	3	✓	✓	✓	FS2		DM1-127D8EB-S20S-EM 3-5047-003A	
11	2.2	3	17.5	4	5	✓	✓	✓			DM1-12011EB-S20S-EM 3-5047-004A	
17.5	4	5	25	5.5	7.5	✓	✓	✓	FS3		DM1-12017EB-S20S-EM 3-5049-002A	

Notes

- ¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

DM1 variable frequency drives up to 22 kW

2.5

DM1 Pro for three-phase motors 230 V, three-phase

Rated operation current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operation current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW HP		$I_n = 110\%$ I_e A	kW HP						Radio interference suppression filter	Brake chopper
U_e 230 V AC, three-phase / U₂ 230 V AC, three-phase, without EMC filter												
Mains voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
1.6	0.25	0.25	3	0.55	0.5	-	✓	✓	FS1	IP20/NEMA0	DM1-321D6NB-S20S-EM 3-5002-005A	1 unit
3	0.55	0.5	4.8	1.1	1	-	✓	✓			DM1-323D0NB-S20S-EM 3-5002-006A	
4.8	1.1	1	7.8	1.5	2	-	✓	✓			DM1-324D8NB-S20S-EM 3-5002-007A	
7.8	1.5	2	11	2.2	3	-	✓	✓			DM1-327D8NB-S20S-EM 3-5002-008A	
11	2.2	3	17.5	4	5	-	✓	✓	FS2		DM1-32011NB-S20S-EM 3-5004-003A	
17.5	4	5	25	5.5	7.5	-	✓	✓			DM1-32017NB-S20S-EM 3-5004-004A	
25	5.5	7.5	32	7.5	10	-	✓	✓	FS3		DM1-32025NB-S20S-EM 3-5006-002A	
32	7.5	10	48	11	15	-	✓	✓	FS4		DM1-32032NB-S20S-EM 3-5008-003A	
48	11	15	61	15	20	-	✓	✓			DM1-32048NB-S20S-EM 3-5008-004A	
U_e 230 V AC, three-phase / U₂ 230 V AC, three-phase, with EMC filter												
Mains voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
1.6	0.25	0.25	3	0.55	0.5	✓	✓	✓	FS1	IP20/NEMA0	DM1-321D6EB-S20S-EM 3-5001-005A	1 unit
3	0.55	0.5	4.8	1.1	1	✓	✓	✓			DM1-323D0EB-S20S-EM 3-5001-006A	
4.8	1.1	1	7.8	1.5	2	✓	✓	✓			DM1-324D8EB-S20S-EM 3-5001-007A	
7.8	1.5	2	11	2.2	3	✓	✓	✓			DM1-327D8EB-S20S-EM 3-5001-008A	
11	2.2	3	17.5	4	5	✓	✓	✓	FS2		DM1-32011EB-S20S-EM 3-5003-003A	
17.5	4	5	25	5.5	7.5	✓	✓	✓			DM1-32017EB-S20S-EM 3-5003-004A	
25	5.5	7.5	32	7.5	10	✓	✓	✓	FS3		DM1-32025EB-S20S-EM 3-5005-002A	
32	7.5	10	48	11	15	✓	✓	✓	FS4		DM1-32032EB-S20S-EM 3-5007-003A	
48	11	15	61	15	20	✓	✓	✓			DM1-32048EB-S20S-EM 3-5007-004A	

Notes

- ¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

DM1

2.5

DM1 variable frequency drives up to 22 kW

DM1 Pro for three-phase motors 400 V, three-phase

Rated operation current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operation current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW		HP	$I_n = 110\%$ I_e A						kW	HP
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, without EMC filter												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
1.5	0.55	0.5	2.2	0.75	1	-	✓	✓	FS1	IP20/NEMA0	DM1-341D5NB-S20S-EM 3-5010-005A	1 unit
2.2	0.75	1	4.3	1.5	2	-	✓	✓			DM1-342D2NB-S20S-EM 3-5010-006A	
4.3	1.5	2	5.6	2.2	3	-	✓	✓			DM1-344D3NB-S20S-EM 3-5010-007A	
5.6	2.2	3	7.6	3 ⁴⁾	5	-	✓	✓			DM1-345D6NB-S20S-EM 3-5010-008A	
7.6	3	5	12	5.5	7.5	-	✓	✓	FS2		DM1-347D6NB-S20S-EM 3-5012-004A	
12	5.5	7.5	16	7.5	10	-	✓	✓			DM1-34012NB-S20S-EM 3-5012-005A	
16	7.5	10	23	11	15	-	✓	✓			DM1-34016NB-S20S-EM 3-5012-006A	
23	11	15	31	15	20	-	✓	✓	FS3		DM1-34023NB-S20S-EM 3-5014-002A	
31	15	20	38	18.5	25	-	✓	✓	FS4		DM1-34031NB-S20S-EM 3-5016-003A	
38	18.5	25	46	22	30	-	✓	✓			DM1-34038NB-S20S-EM 3-5016-004A	
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, with EMC filter												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
1.5	0.55	0.5	2.2	0.75	1	✓	✓	✓	FS1	IP20/NEMA0	DM1-341D5EB-S20S-EM 3-5009-005A	1 unit
2.2	0.75	1	4.3	1.5	2	✓	✓	✓			DM1-342D2EB-S20S-EM 3-5009-006A	
4.3	1.5	2	5.6	2.2	3	✓	✓	✓			DM1-344D3EB-S20S-EM 3-5009-007A	
5.6	2.2	3	7.6	3 ⁴⁾	5	✓	✓	✓			DM1-345D6EB-S20S-EM 3-5009-008A	
7.6	3	5	12	5.5	7.5	✓	✓	✓	FS2		DM1-347D6EB-S20S-EM 3-5011-004A	
12	5.5	7.5	16	7.5	10	✓	✓	✓			DM1-34012EB-S20S-EM 3-5011-005A	
16	7.5	10	23	11	15	✓	✓	✓			DM1-34016EB-S20S-EM 3-5011-006A	
23	11	15	31	15	20	✓	✓	✓	FS3		DM1-34023EB-S20S-EM 3-5013-002A	
31	15	20	38	18.5	25	✓	✓	✓	FS4		DM1-34031EB-S20S-EM 3-5015-003A	
38	18.5	25	46	22	30	✓	✓	✓			DM1-34038EB-S20S-EM 3-5015-004A	

Notes

- ¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz
- ⁴⁾ Output VT 4 kW 8.4 A at 400 V three-phase 10.1 A Input.

DM1 variable frequency drives up to 22 kW

DM1 Pro for three-phase motors, 575 V, three-phase

2.5

Rated operation current ¹⁾	Assigned motor output ¹⁾²⁾³⁾		Rated operation current ¹⁾	Assigned motor output ¹⁾²⁾³⁾		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW		HP	$I_n = 110\%$ I_e A						kW	HP
U_e 575 V AC, three-phase / U₂ 575 V AC, three-phase, without EMC filter												
Mains voltage (50/60Hz) U _{LN} : 525 (-15%) - 600 (+10%) V												
4.5	2.2	3	7.5	4	5	-	✓	✓	FS2	IP20/NEMA0	DM1-354D5NB-S20S-EM 3-5051-004A	1 unit
7.5	4	5	10	5.5	7.5	-	✓	✓			DM1-357D5NB-S20S-EM 3-5051-005A	
10	5.5	7.5	13.5	7.5	10	-	✓	✓			DM1-35010NB-S20S-EM 3-5051-006A	
13.5	7.5	10	18	11	15	-	✓	✓	FS3		DM1-35013NB-S20S-EM 3-5052-002A	
18	11	15	22	15	20	-	✓	✓	FS4		DM1-35018NB-S20S-EM 3-5053-003A	
22	15	20	27	18.5	25	-	✓	✓			DM1-35022NB-S20S-EM 3-5053-004A	
U_e 575 V AC, three-phase / U₂ 575 V AC, three-phase, with EMC filter												
Mains voltage (50/60Hz) U _{LN} : 525 (-15%) - 600 (+10%) V												
4.5	2.2	3	7.5	4	5	✓	✓	✓	FS2	IP20/NEMA0	DM1-354D5EB-S20S-EM 3-5060-004A	1 unit
7.5	4	5	10	5.5	7.5	✓	✓	✓			DM1-357D5EB-S20S-EM 3-5060-005A	
10	5.5	7.5	13.5	7.5	10	✓	✓	✓			DM1-35010EB-S20S-EM 3-5060-006A	
13.5	7.5	10	18	11	15	✓	✓	✓	FS3		DM1-35013EB-S20S-EM 3-5061-002A	
18	11	15	22	15	20	✓	✓	✓	FS4		DM1-35018EB-S20S-EM 3-5062-003A	
22	15	20	27	18.5	25	✓	✓	✓			DM1-35022EB-S20S-EM 3-5062-004A	

Notes

- ¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz






DM1

2.5

DM1 variable frequency drives up to 22 kW

Accessories

Accessories

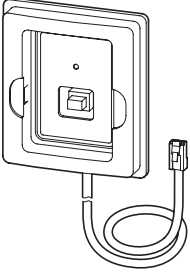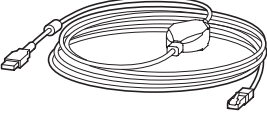	Description	For use with	Model code	Catalog number	Std. pack	
	DM1 IP21 / NEMA1 kit					
	In addition to increasing the degree of protection, the NEMA1 kit also features a cable duct and the option of terminating shielding. Moreover, the ferrite cores can be housed inside this enclosure.					
	DM1 FR1 NEMA 1 kit	DM1	DXM-ACC-FR1N1KIT	3-5033-001A	1 unit	
	DM1 FR2 NEMA 1 kit	DM1	DXM-ACC-FR2N1KIT	3-5034-001A		
	DM1 FR3 NEMA 1 kit	DM1	DXM-ACC-FR3N1KIT	3-5035-001A		
	DM1 FR4 NEMA 1 kit	DM1	DXM-ACC-FR4N1KIT	3-5036-001A		
	DM1 IP21 / NEMA1 kit 100kA UL Plenum rating					
	DM1 Size 1 plenum rated NEMA 1 kit	DM1	DXM-ACC-FR1N1PKIT	3-5056-001A	1 unit	
	DM1 Size 2 plenum rated NEMA 1 kit	DM1	DXM-ACC-FR2N1PKIT	3-5057-001A		
	DM1 Size 3 plenum rated NEMA 1 kit	DM1	DXM-ACC-FR3N1PKIT	3-5058-001A		
	DM1 Size 4 plenum rated NEMA 1 kit	DM1	DXM-ACC-FR4N1PKIT	3-5059-001A		
	DM1 Pro network interfaces					
	DM1 PROFIBUS option with plug-in enclosure	DM1	DXM-NET-PROFIBUS	3-5039-001A	1 unit	
	DM1 CANopen option with plug-in enclosure	DM1	DXM-NET-CANOPEN	3-5040-001A		
	DM1 PROFINET option with plug-in enclosure	DM1	DXM-NET-PROFINET	EP-400004		
	DM1 keypad options					
	DG1/DH1 Keypad: RMTKIT		DXG-KEY-RMTKIT	730-32033-00P	1 unit	
	Cable					
	USB to RJ45 cable, 1.5m	DG1, DH1, DM1, DX1	DXX-CBL-PCCABLE	3-5975-001	1 unit	

2.5

DM1 variable frequency drives up to 22 kW

Assigned switching and protective elements for DM1

Engineering

Model code	power rating 110 % kW	input current 110 % A	output current 110 % A	power rating 150 % kW	input current 150 % A	output current 150 % A	MCCB Type 1 coordination @ 110 %	Fuse Type 1 coordination @ 110 %	MCCB Type 1 coordination @ 150 %	Fuse Type 1 coordination @ 150 %	minimum braking resistance	recommen- ded braking resistance	brake resistor, 10 % duty cycle @ 110 %
115 V AC, single-phase/230 V AC, three-phase													
DM1-111D6...	0.55	13.5	3	0.25	6.4	1.6	PKZM0-16	C10G16	PKZM0-12	C10G12	47	100	DX-BR100-240
DM1-113D0...	1.1	20	4.8	0.55	13.5	3	PKZM0-25	C10G25	PKZM0-32	C10G32	47	100	DX-BR100-240
DM1-114D8...	1.5	26.4	6.9	1.1	20	4.8	PKZM0-32	C10G32	PKZM0-32	C10G32	27	100	DX-BR100-600
DM1-116D9...	1.5	30	7.8	1.5	26.4	6.9	PKZM4-40	C22G40	PKZM4-40	C22G40	27	100	DX-BR100-600
230 V AC, single-phase/230 V AC, three-phase													
DM1-121D6...	0.55	8	3	0.25	4	1.6	PKZM0-12	C10G12	PKZM0-6,3	C10G8	36	100	DX-BR100-240
DM1-123D0...	1.1	11	4.8	0.55	8	3	PKZM0-16	C10G16	PKZM0-16	C10G16	36	100	DX-BR100-240
DM1-124D8...	1.5	18	7.8	1.1	11	4.8	PKZM0-25	C10G25	PKZM0-25	C10G25	36	100	DX-BR100-600
DM1-127D8...	2.2	23	11	1.5	18	7.8	PKZM0-32	C10G32	PKZM0-32	C10G32	27	100	DX-BR100-600
DM1-12011...	4	38	17.5	2.2	23	11	PKZM4-50	C22G50	PKZM4-40	C22G40	27	40	DX-BR035-1K1
DM1-12017...	5.5	49.6	25	4	38	17.5	PKZM4-63	C22G63	PKZM4-63	C22G63	16	40	DX-BR035-1K1
230 V AC, three-phase/230 V AC, three-phase													
DM1-321D6...	0.55	3.9	3	0.25	2.1	1.6	PKZM0-6,3	C10G8	PKZM0-6,3	C10G8	36	100	DX-BR100-240
DM1-323D0...	1.1	5.8	4.8	0.55	3.9	3	PKZM0-10	C10G10	PKZM0-6,3	C10G8	36	100	DX-BR100-240
DM1-324D8...	1.5	9.4	7.8	1.1	5.8	4.8	PKZM0-12	C10G12	PKZM0-10	C10G10	36	100	DX-BR100-600
DM1-327D8...	2.2	12.7	11	1.5	9.4	7.8	PKZM0-20	C10G20	PKZM0-20	C10G20	36	100	DX-BR100-600
DM1-32011...	4	20.1	17.5	2.2	12.7	11	PKZM0-32	C10G32	PKZM0-20	C10G20	16	40	DX-BR035-1K1
DM1-32017...	5.5	29.1	25	4	20.1	17.5	PKZM4-40	C22G40	PKZM0-32	C10G32	16	40	DX-BR035-1K1
DM1-32025...	7.5	35.4	32	5.5	29.1	25	PKZM4-50	C22G50	PKZM4-50	C22G50	12	20	DX-BR022-1K4
DM1-32032...	11	53.1	48	7.5	35.4	32	PKZM4-63	C22G63	PKZM4-63	C22G63	6	20	DX-BR012-3K1
DM1-32048...	15	68.3	61	11	53.1	48	NZMC1-A80	C22G80	NZMC1-A80	C22G80	6	20	DX-BR012-3K1
400 V AC, three-phase/400 V AC, three-phase													
DM1-341D5...	0.75	2.6	2.2	0.55	1.8	1.5	PKZM0-6,3	C10G8	PKZM0-4	C10G4	105	400	DX-BR216-600
DM1-342D2...	1.5	5.2	4.3	0.75	2.6	2.2	PKZM0-10	C10G10	PKZM0-6,3	C10G8	105	400	DX-BR216-600
DM1-344D3...	2.2	6.7	5.6	1.5	5.2	4.3	PKZM0-12	C10G12	PKZM0-10	C10G10	105	400	DX-BR216-600
DM1-345D6... ¹⁾	3	9.1	7.6	2.2	6.7	5.6	PKZM0-16	C10G16	PKZM0-12	C10G12	105	400	DX-BR200-0K8
DM1-347D6...	5.5	14.4	12	3	9.1	7.6	PKZM0-20	C10G20	PKZM0-16	C10G16	35	128	DX-BR100-1K1
DM1-34012...	7.5	19.2	16	5.5	14.4	12	PKZM0-25	C10G25	PKZM0-25	C10G25	35	128	DX-BR100-1K6
DM1-34016...	11	26.5	23	7.5	19.2	16	PKZM0-32	C10G32	PKZM0-32	C10G32	35	80	DX-BR047-3K1
DM1-34023...	15	35.7	31	11	26.5	23	PKZM4-50	C22G50	PKZM4-50	C22G50	26	80	DX-BR047-3K1
DM1-34031...	18.5	43.7	38	15	35.7	31	PKZM4-58	C22G63	PKZM4-58	C22G63	17	40	DX-BR040-5K1
DM1-34038...	22	52.9	46	18.5	43.7	38	PKZM4-63	C22G63	NZMC1-A80	C22G80	17	40	DX-BR040-5K1
575 V AC, three-phase/575 V AC, three-phase													
DM1-354D5...	4	9	7.5	2.2	6	4.5	PKZM0-12	C14G12	PKZM0-10	C14G10	40	200	DX-BR200-0K8
DM1-357D5...	5.5	12	10	4	9	7.5	PKZM0-16	C14G16	PKZM0-16	C14G16	40	200	DX-BR150-1K1
DM1-35010...	7.5	16.2	13.5	5.5	12	10	PKZM0-25	C14G25	PKZM0-20	C14G20	40	200	DX-BR100-1K6
DM1-35013...	11	21.6	18	7.5	16.2	13.5	PKZM0-32	C14G32	PKZM0-25	C14G25	20	100	DX-BR047-3K1
DM1-35018...	15	26.4	22	11	21.6	18	PKZM4-40	C22G40	PKZM4-40	C22G40	20	100	DX-BR047-3K1
DM1-35022...	18.5	32.4	27	15	26.4	22	PKZM4-50	C22G50	PKZM4-50	C22G50	20	100	DX-BR075-5K1

Note ¹⁾ For 4 kW @ 110 % rating, please contact Eaton for assigned switching and protective elements.

DM1 variable frequency drives up to 22 kW

Assigned switching and protective elements for DM1

2.5

brake resistor, 20 % duty cycle @ 110 % brake resistor, 40 % duty cycle @ 110 % brake resistor, 10 % duty cycle @ 150 % brake resistor, 20 % duty cycle @ 150 % brake resistor, 40 % duty cycle @ 150 % RCD type @ 110 % RCD type @ 150 % optional mains contactor @ 110 %

DX-BR100-240	DX-BR100-600	DX-BR100-240	DX-BR100-240	DX-BR100-240	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR100-600	DX-BR100-1K1	DX-BR100-240	DX-BR100-240	DX-BR100-600	FRCdM-25/4/003-G/Bfq	FRCdM-40/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR100-1K1	DX-BR100-1K1	DX-BR100-240	DX-BR100-600	DX-BR100-1K1	FRCdM-40/4/003-G/Bfq	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)
DX-BR100-1K1	DX-BR100-1K1	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K1	FRCdM-40/4/003-G/Bfq	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)
DX-BR100-240	DX-BR100-600	DX-BR100-240	DX-BR100-240	DX-BR100-240	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR100-600	DX-BR100-1K1	DX-BR100-240	DX-BR100-240	DX-BR100-600	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR100-1K1	DX-BR100-1K1	DX-BR100-240	DX-BR100-600	DX-BR100-1K1	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR100-1K1	DX-BR100-1K6	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K1	FRCdM-40/4/003-G/Bfq	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)
DX-BR040-3K1	DX-BR040-3K1	DX-BR035-1K1	DX-BR035-1K1	DX-BR040-3K1	FRCdM-63/4/003-G/Bfq	FRCdM-40/4/003-G/Bfq	DILM40(RDC24)
DX-BR040-3K1	DX-BR040-5K1	DX-BR035-1K1	DX-BR040-3K1	DX-BR040-3K1	FRCdM-63/4/003-G/Bfq	FRCdM-63/4/003-G/Bfq	DILM40(RDC24)
DX-BR100-240	DX-BR100-600	DX-BR100-240	DX-BR100-240	DX-BR100-240	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR100-600	DX-BR100-1K1	DX-BR100-240	DX-BR100-240	DX-BR100-600	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR100-1K1	DX-BR100-1K1	DX-BR100-240	DX-BR100-600	DX-BR100-1K1	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR100-1K1	DX-BR100-1K6	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K1	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR040-3K1	DX-BR040-3K1	DX-BR035-1K1	DX-BR035-1K1	DX-BR040-3K1	FRCdM-40/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM17-10(RDC24)
DX-BR040-3K1	DX-BR040-5K1	DX-BR035-1K1	DX-BR040-3K1	DX-BR040-3K1	FRCdM-40/4/003-G/Bfq	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)
DX-BR012-3K1	DX-BR012-5K1	DX-BR022-1K4	DX-BR012-3K1	DX-BR012-5K1	FRCdM-63/4/003-G/Bfq	FRCdM-63/4/003-G/Bfq	DILM17-10(RDC24)
DX-BR012-5K1	DX-BR012-9K2	DX-BR022-1K4	DX-BR012-3K1	DX-BR012-5K1	FRCdM-63/4/003-G/Bfq	FRCdM-63/4/003-G/Bfq	DILM40(RDC24)
DX-BR012-5K1	DX-BR012-9K2	DX-BR012-3K1	DX-BR012-5K1	DX-BR012-9K2	-	-	DILM50(RDC24)
DX-BR216-600	DX-BR200-0K8	DX-BR216-600	DX-BR216-600	DX-BR216-600	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR200-0K8	DX-BR150-1K1	DX-BR216-600	DX-BR216-600	DX-BR200-0K8	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR200-0K8	R: 2x DX-BR100-1K6	DX-BR216-600	DX-BR200-0K8	DX-BR150-1K1	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR150-1K1	R: 2x DX-BR100-1K6	DX-BR216-600	DX-BR200-0K8	R: 2x DX-BR100-1K6	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR047-3K1	DX-BR075-5K1	DX-BR100-1K1	DX-BR100-1K1	DX-BR047-3K1	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR047-3K1	DX-BR075-5K1	DX-BR100-1K1	DX-BR047-3K1	DX-BR075-5K1	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR075-5K1	DX-BR047-9K2	DX-BR047-3K1	DX-BR047-3K1	DX-BR075-5K1	FRCdM-40/4/003-G/Bfq	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)
DX-BR075-5K1	DX-BR047-9K2	DX-BR047-3K1	DX-BR075-5K1	DX-BR047-9K2	FRCdM-63/4/003-G/Bfq	FRCdM-63/4/003-G/Bfq	DILM17-10(RDC24)
DX-BR022-9K2	P: 2x DX-BR050-5K1	DX-BR040-3K1	DX-BR040-5K1	DX-BR022-9K2	FRCdM-63/4/003-G/Bfq	FRCdM-63/4/003-G/Bfq	DILM40(RDC24)
DX-BR022-9K2	P: 2x DX-BR047-9K2	DX-BR040-5K1	DX-BR022-9K2	P: 2x DX-BR050-5K1	FRCdM-63/4/003-G/Bfq	-	DILM40(RDC24)
DX-BR100-1K6	DX-BR047-3K1	DX-BR200-0K8	DX-BR200-0K8	DX-BR100-1K6	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR047-3K1	DX-BR075-5K1	DX-BR200-0K8	DX-BR100-1K6	DX-BR047-3K1	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR047-3K1	DX-BR075-5K1	DX-BR150-1K1	DX-BR047-3K1	DX-BR075-5K1	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)
DX-BR075-5K1	DX-BR047-9K2	DX-BR100-1K6	DX-BR047-3K1	DX-BR075-5K1	FRCdM-40/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM17-10(RDC24)
DX-BR100-6K2	DX-BR047-9K2	DX-BR047-3K1	DX-BR075-5K1	DX-BR047-9K2	FRCdM-40/4/003-G/Bfq	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)
DX-BR100-6K2	P: 2x DX-BR100-6K2	DX-BR047-3K1	DX-BR100-6K2	DX-BR047-9K2	FRCdM-63/4/003-G/Bfq	FRCdM-63/4/003-G/Bfq	DILM17-10(RDC24)

Notes R: = Mount in series
P: = Mount in parallel

DM1

2.5

DM1 variable frequency drives up to 22 kW

Assigned switching and protective elements for DM1

optional mains contactor @ 150 % External EMC filter @ 110 % External EMC filter @ 150 % External EMC filter (low leakage current) @ 110 % External EMC filter (low leakage current) @ 150 % Mains choke @ 110 % U_k Mains choke @ 150 % U_k

115 V AC, single-phase/230 V AC, three-phase								
DILM7-10(24VDC)	DX-EMC12-016	DX-EMC12-008	DX-EMC12-016-SL	DX-EMC12-008-SL	DX-LN1-018	4 %	DX-LN1-009	4 %
DILM7-10(24VDC)	DX-EMC12-020	DX-EMC12-016	DX-EMC12-020-SL	DX-EMC12-016-SL	DX-LN1-024	4 %	DX-LN1-018	4 %
DILM17-10(RDC24)	DX-EMC12-030	DX-EMC12-020	DX-EMC12-030-SL	DX-EMC12-020-SL	DX-LN1-032	4 %	DX-LN1-024	4 %
DILM17-10(RDC24)	DX-EMC12-030	DX-EMC12-030	DX-EMC12-030-SL	DX-EMC12-030-SL	DX-LN1-032	4 %	DX-LN1-032	4 %
230 V AC, single-phase/230 V AC, three-phase								
DILM7-10(24VDC)	DX-EMC12-008	DX-EMC12-004	DX-EMC12-008-SL	DX-EMC12-004-SL	DX-LN1-009	4 %	DX-LN1-006	4 %
DILM7-10(24VDC)	DX-EMC12-012	DX-EMC12-008	DX-EMC12-012-SL	DX-EMC12-008-SL	DX-LN1-013	4 %	DX-LN1-009	4 %
DILM7-10(24VDC)	DX-EMC12-020	DX-EMC12-012	DX-EMC12-020-SL	DX-EMC12-012-SL	DX-LN1-018	4 %	DX-LN1-013	4 %
DILM17-10(RDC24)	DX-EMC12-025	DX-EMC12-020	DX-EMC12-025-SL	DX-EMC12-020-SL	DX-LN1-024	4 %	DX-LN1-018	4 %
DILM17-10(RDC24)	DX-EMC12-042	DX-EMC12-025	DX-EMC12-042-SL	DX-EMC12-025-SL	-	-	DX-LN1-024	4 %
DILM40(RDC24)	DX-EMC12-055	DX-EMC12-042	DX-EMC12-055-SL	DX-EMC12-042-SL	-	-	-	-
230 V AC, three-phase/230 V AC, three-phase								
DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L	DX-LN3-004	4 %	DX-LN3-004	4 %
DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L	DX-LN3-006	4 %	DX-LN3-004	4 %
DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-008	DX-EMC34-016-L	DX-EMC34-008-L	DX-LN3-010	4 %	DX-LN3-006	4 %
DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016	DX-EMC34-016-L	DX-EMC34-016-L	DX-LN3-016	4 %	DX-LN3-010	4 %
DILM7-10(24VDC)	DX-EMC34-030	DX-EMC34-016	DX-EMC34-030-L	DX-EMC34-016-L	DX-LN3-025	4 %	DX-LN3-016	4 %
DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030	DX-EMC34-030-L	DX-EMC34-030-L	DX-LN3-040	2.5 %	DX-LN3-025	4 %
DILM40(RDC24)	DX-EMC34-042	DX-EMC34-030	DX-EMC34-042-L	DX-EMC34-030-L	DX-LN3-040	2.5 %	DX-LN3-040	2.5 %
DILM40(RDC24)	DX-EMC34-055	DX-EMC34-042	DX-EMC34-055-L	DX-EMC34-042-L	DX-LN3-060	2.5 %	DX-LN3-040	2.5 %
DILM50(RDC24)	DX-EMC34-075	DX-EMC34-055	DX-EMC34-075-L	DX-EMC34-055-L	DX-LN3-080	2.5 %	DX-LN3-060	2.5 %
400 V AC, three-phase/400 V AC, three-phase								
DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L	DX-LN3-004	4 %	DX-LN3-004	4 %
DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L	DX-LN3-006	4 %	DX-LN3-004	4 %
DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L	DX-LN3-010	4 %	DX-LN3-006	4 %
DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-008	DX-EMC34-016-L	DX-EMC34-008-L	DX-LN3-010	4 %	DX-LN3-010	4 %
DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016	DX-EMC34-016-L	DX-EMC34-016-L	DX-LN3-016	4 %	DX-LN3-010	4 %
DILM7-10(24VDC)	DX-EMC34-030	DX-EMC34-016	DX-EMC34-030-L	DX-EMC34-016-L	DX-LN3-025	4 %	DX-LN3-016	4 %
DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030	DX-EMC34-030-L	DX-EMC34-030-L	DX-LN3-040	2.5 %	DX-LN3-025	4 %
DILM17-10(RDC24)	DX-EMC34-042	DX-EMC34-030	DX-EMC34-042-L	DX-EMC34-030-L	DX-LN3-040	2.5 %	DX-LN3-040	2.5 %
DILM40(RDC24)	DX-EMC34-055	DX-EMC34-042	DX-EMC34-055-L	DX-EMC34-042-L	DX-LN3-050	2.5 %	DX-LN3-040	2.5 %
DILM50(RDC24)	DX-EMC34-055	DX-EMC34-055	DX-EMC34-055-L	DX-EMC34-055-L	DX-LN3-060	2.5 %	DX-LN3-050	2.5 %
575 V AC, three-phase/575 V AC, three-phase								
DILM7-10(24VDC)								
DILM7-10(24VDC)								
DILM7-10(24VDC)								
DILM17-10(RDC24)								
DILM17-10(RDC24)								
DILM17-10(RDC24)								

DM1

DM1 variable frequency drives up to 22 kW

2.5

Assigned switching and protective elements for DM1

passive harmonic filter @ 110 %	passive harmonic filter @ 150 %	Motor choke @ 110 %	Motor choke @ 150 %	Sine filter @ 110 %	Sine filter @ 150 %	All-pole sine filter @ 110 %	All-pole sine filter @ 150 %
-	-	DX-LM3-008	DX-LM3-008	DX-SIN3-004	DX-SIN3-004	DX-SIN3-004-A	DX-SIN3-2D5-A
-	-	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-004	DX-SIN3-006-A	DX-SIN3-004-A
-	-	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-006-A
-	-	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
-	-	DX-LM3-008	DX-LM3-008	DX-SIN3-004	DX-SIN3-004	DX-SIN3-004-A	DX-SIN3-2D5-A
-	-	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-004	DX-SIN3-006-A	DX-SIN3-004-A
-	-	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-006-A
-	-	DX-LM3-011	DX-LM3-008	DX-SIN3-016	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
-	-	DX-LM3-035	DX-LM3-011	DX-SIN3-023	DX-SIN3-016	DX-SIN3-024-A	DX-SIN3-013-A
-	-	DX-LM3-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-023	DX-SIN3-046-A	DX-SIN3-024-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-004	DX-SIN3-004	DX-SIN3-004-A	DX-SIN3-2D5-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-004	DX-SIN3-006-A	DX-SIN3-004-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-006-A
DX-PHF34-019	DX-PHF34-010	DX-LM3-011	DX-LM3-008	DX-SIN3-016	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DX-PHF34-026	DX-PHF34-019	DX-LM3-035	DX-LM3-011	DX-SIN3-023	DX-SIN3-016	DX-SIN3-024-A	DX-SIN3-013-A
DX-PHF34-035	DX-PHF34-026	DX-LM3-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-023	DX-SIN3-046-A	DX-SIN3-024-A
DX-PHF34-044	DX-PHF34-035	DX-LM3-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-032	DX-SIN3-046-A	DX-SIN3-046-A
DX-PHF34-073	DX-PHF34-044	DX-LM3-050	DX-LM3-035	DX-SIN3-048	DX-SIN3-032	DX-SIN3-065-A	DX-SIN3-046-A
DX-PHF34-073	DX-PHF34-073	DX-LM3-063	DX-LM3-050	DX-SIN3-061	DX-SIN3-048	DX-SIN3-065-A	DX-SIN3-065-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-004	DX-SIN3-004	DX-SIN3-2D5-A	DX-SIN3-2D5-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-004	DX-SIN3-006-A	DX-SIN3-2D5-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-006-A	DX-SIN3-006-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-006-A
DX-PHF34-019	DX-PHF34-010	DX-LM3-016	DX-LM3-008	DX-SIN3-016	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DX-PHF34-026	DX-PHF34-019	DX-LM3-016	DX-LM3-016	DX-SIN3-016	DX-SIN3-016	DX-SIN3-024-A	DX-SIN3-013-A
DX-PHF34-035	DX-PHF34-026	DX-LM3-035	DX-LM3-016	DX-SIN3-023	DX-SIN3-016	DX-SIN3-024-A	DX-SIN3-024-A
DX-PHF34-044	DX-PHF34-035	DX-LM3-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-023	DX-SIN3-046-A	DX-SIN3-024-A
DX-PHF34-044	DX-PHF34-044	DX-LM3-050	DX-LM3-035	DX-SIN3-048	DX-SIN3-032	DX-SIN3-046-A	DX-SIN3-046-A
DX-PHF34-073	DX-PHF34-044	DX-LM3-050	DX-LM3-050	DX-SIN3-048	DX-SIN3-048	DX-SIN3-046-A	DX-SIN3-046-A
		DX-LM3-008	DX-LM3-008				
		DX-LM3-011	DX-LM3-008				
		DX-LM3-016	DX-LM3-011				
		DX-LM3-035	DX-LM3-016				
		DX-LM3-035	DX-LM3-035				
		DX-LM3-035	DX-LM3-035				

DM1


2.5

DM1 variable frequency drives up to 22 kW


Connection examples

Connection example for DM1 Pro with the following functions:

- ① Setpoint input via external analog setpoint
- ② Setpoint input via keyboard, network, or internal setpoint potentiometer; process value fed back to AI1 and use of PID controller
- Dual-channel STO

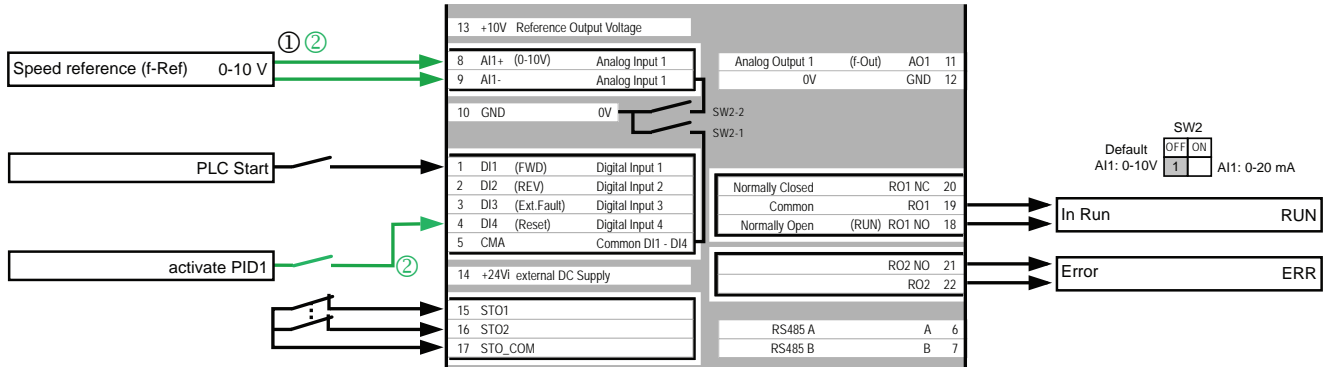

Connection example for master-follower operation in which the follower runs with the same torque as the master. A rigid mechanical coupling is required. For non-rigid couplings, the droop function is used instead of torque forwarding via AO1 to the follower. The same setpoint input / PID use specifications as for the previous example apply here as well.

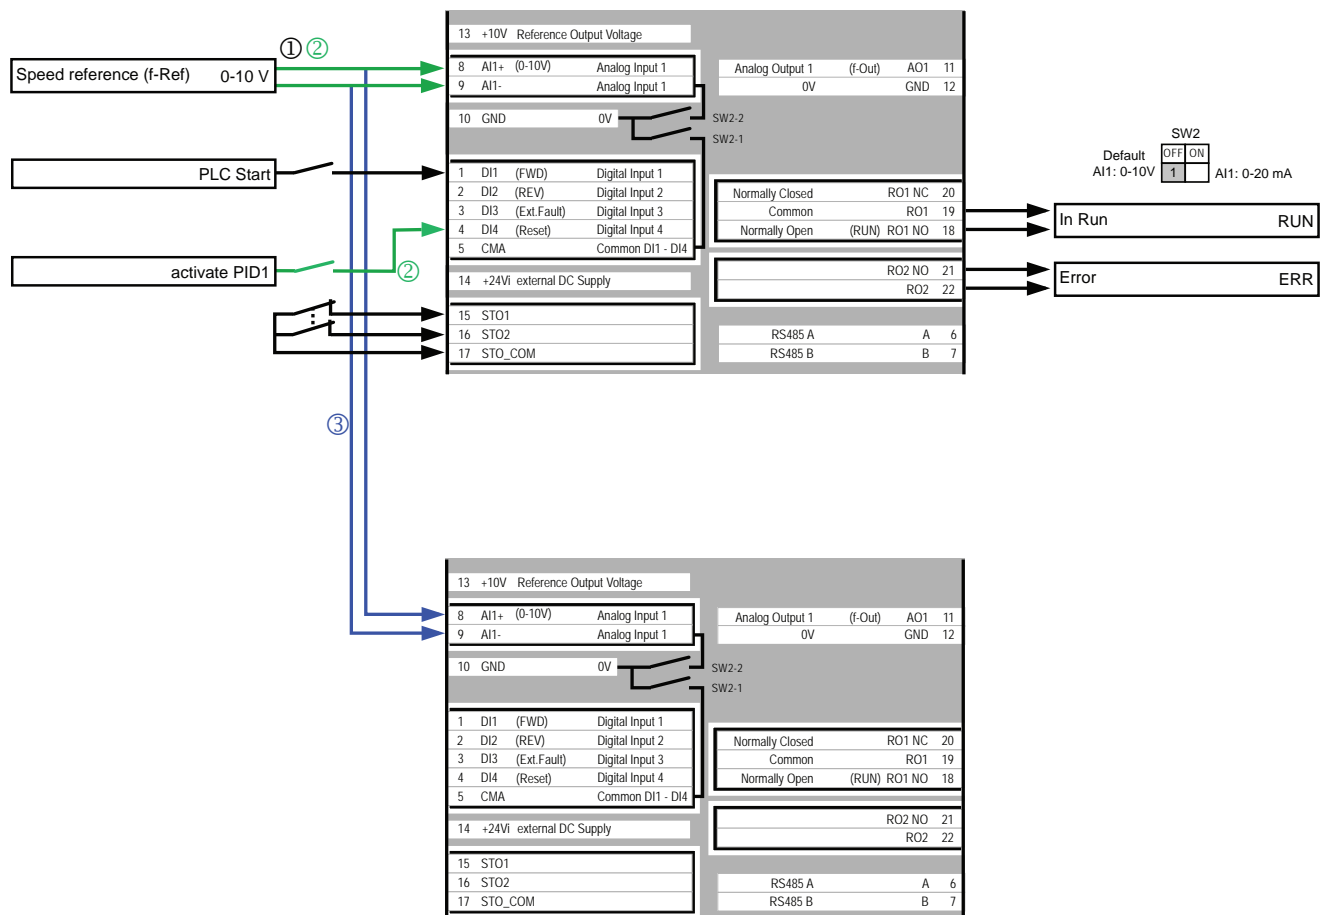

DM1

Technical specifications

	Unit	Value
General		
Product standard		IEC/EN 61800-2
Production standard		RoHS, ISO 9001
Security		IEC/EN 61800-5-1:2007/A1:2017; UL 61800-5-1:2012 (Rev. 2018), CSA C22.2 No. 274-17:2017
Radio interference level		IEC/EN 61800-3
Integrated radio interference suppression filter		Yes, C2
Radio interference class (EMC)		C1 (with external filter, for conducted emissions only), C2, C3, depending on the motor cable length, the connected load, and ambient conditions. External radio interference suppression filters (optional) may be necessary.
Radio interference class (EMC), external filters		Optional external radio interference suppression filter for longer motor cable lengths and for use in different EMC environments
Environment (EMC)		1st and 2nd environments as per EN 61800-3
First environment		Yes
Second environment		Yes
Longest permissible length of motor cable with internal filter		C2 ≤ 5 m C3 ≤ 25 m
Interference immunity		EN 61800-3:2004+A1-2012, first and second environment
Emissions		EN 61800-3:2004+A1-2012, Category C2
Electrostatic discharge (ESD)		IEC 61000-4-2, 4 kV contact, 8 kV air, Second environment, Criterion B
Fast transients (burst)		IEC 61000-4-4, 2 kV/5 kHz, Second environment, Criterion B
Dielectrical strength		Input to output: 3600 V AC/5100 V DC Input to earth: 2000 V AC/2828 V DC
THD		((depends on size))
Acoustic		
Average sound level (fan); sound power level in dB(A)		max. 65.9 dB
Sound level		EN 61800-5-1 (2007)
Climatic proofing		< 95%, average relative humidity (RH), non-condensing, non-corrosive
Ambient temperature		
110% overload (1 min./10 min.)	°C	-10 – +40 (max. +55 with 1% derating per Kelvin temperature rise)
150% overload (1 min./10 min.)	°C	-10 – +50 (max. +60 with 1% derating per Kelvin temperature rise)
T _{min}	°C	-10
T _{max}	°C	60
Ambient conditions		
Ambient air in conformity with IEC/EN 60721-3-3		3C2, 3S2
Storage temperature	°C	-40 - +70
Altitude		Depends on the device model
Permissible network configurations		TN-S, TN-C, TN-C-S, TT, IT
Mounting position		vertical
Protection type		EN 60529:1992
DM1...-C00C		IP20 / NEMA Type 0, IP21/NEMA 1 with option
Busbar tag shroud		BGV A3 (VBG4, finger- and back-of-hand proof)
Oversvoltage category		III
Pollution degree		2
Mechanical shock resistance		EN 61800-5-1, EN 60068-2-27 UPS drop test (for weights inside the UPS frame) Storage and transportation: maximum 15 g, 11 ms (inside the packaging)

2.5

DM1 variable frequency drives up to 22 kW


Technical specifications

	Unit	Value
Main circuit		
Rated operating voltage (three-phase)		
DM1-11...	V	115 (-10%/+10%)
DM1-12...	V	208 (-10%) - 240 (+10%)
DM1-32...	V	208 (-10%) - 240 (+10%)
DM1-34...	V	380 (-10%) - 500 (+10%)
DM1-35...	V	500 (-10%) - 600 (+10%)
Tolerance up	%	10
Tolerance down	%	15
Mains frequency	Hz	50/60
Tolerance	%	10
Mains frequency range	Hz	45 - 66
Mains switch-on frequency		Maximum of one time every 60 seconds
Overload withstand capability		Overload cycle for 60 s every 600 seconds
I_L (1 min./10 min.)	%	110
I_H (1 min./10 min.)	%	150
Comment		Rated operational current for a standard switching frequency and an ambient temperature of +50 °C for a 150% overload and +40 °C for a 110% overload
Short-time overload withstand capability (2 sec / 20 sec)	%	200
Peak-overload cycle		for 2 seconds every 20 seconds
Output voltage at U_o	V	0 - U_{in}
Variable frequency drive functions		
Ramp times		
Startup	s	0.1 - 3000
Delay	s	0.1 - 3000
Control types		All DM1: V/Hz control DM1 Pro: Speed control with slip compensation Sensorless vector control (SLV) Torque control Permanent magnet motor control
Inputs / outputs		
Digital inputs		4, parameterizable, max. 30 V DC
Digital outputs		0
Analog inputs		1, parameterizable, 0 - 10 V DC, 2 - 10 V DC, 0/4 - 20 mA
Analog outputs		1, parameterizable, 0 - 10 V
Relay		3 A (240 V AC) / 3 A (24 V DC) DM1: 1 C/O, parameterizable DM1 Pro: 1 C/O and 1 N/O, parameterizable
Communication		
On-board		All DM1: Modbus RTU DM1 Pro: Modbus TCP, BacNet MS/TP, Bacnet TCP, Ethernet/IP
Optional		PROFIBUS, CAN, DeviceNet, SmartWire-DT, PROFINET


Dimensions

DM1 Pro


Frame size 1

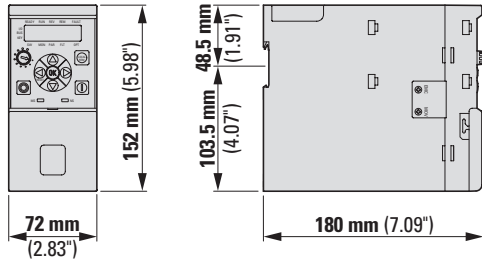


Frame size 2

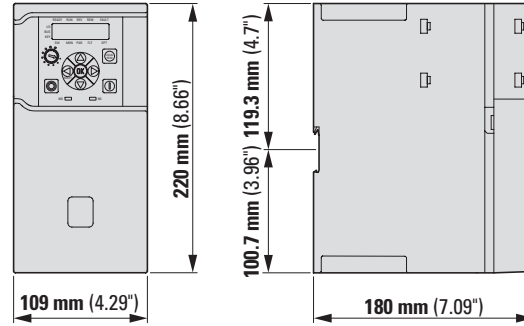

Frame size 3

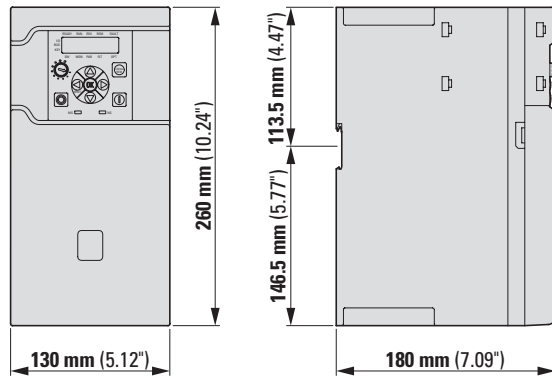


Frame size 4

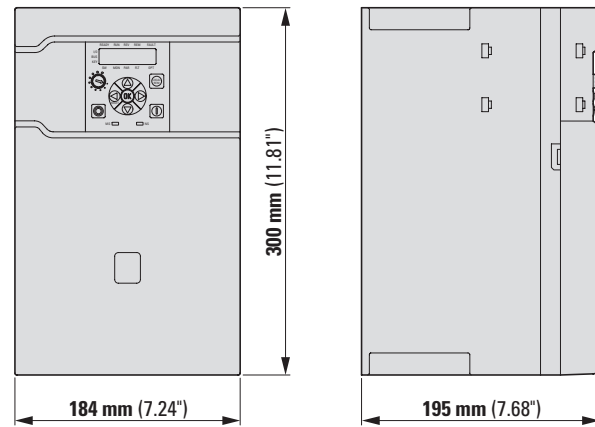


DM1


Frame size 1

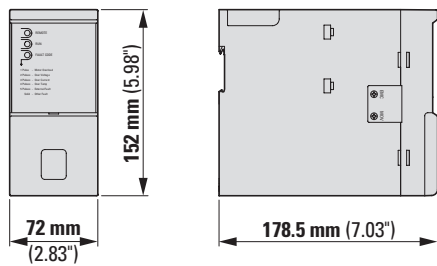


Frame size 2

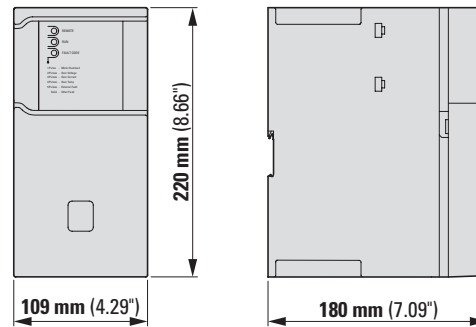

Frame size 3

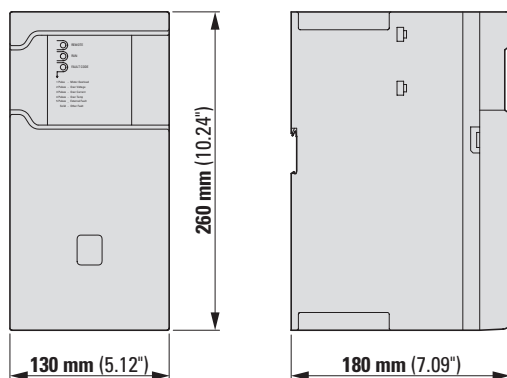

Frame size 4

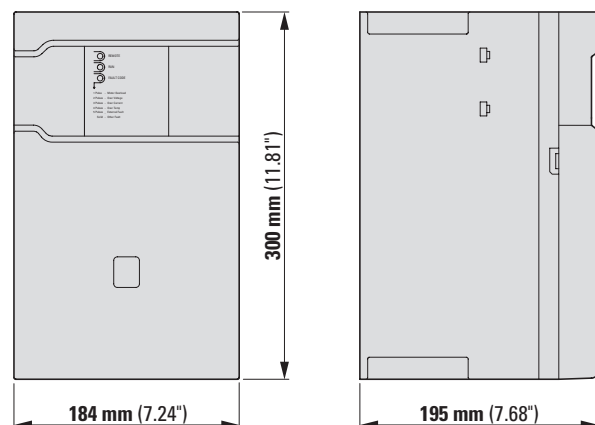


2.5

DM1 variable frequency drives up to 22 kW


Dimensions

DM1 IP21 / NEMA1 kit


Frame size 1

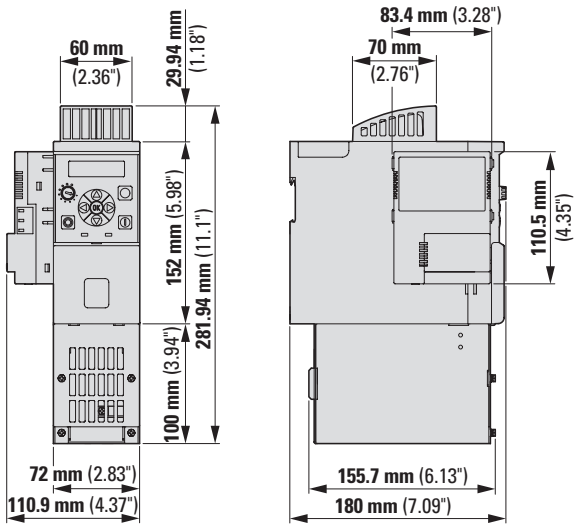


Frame size 2

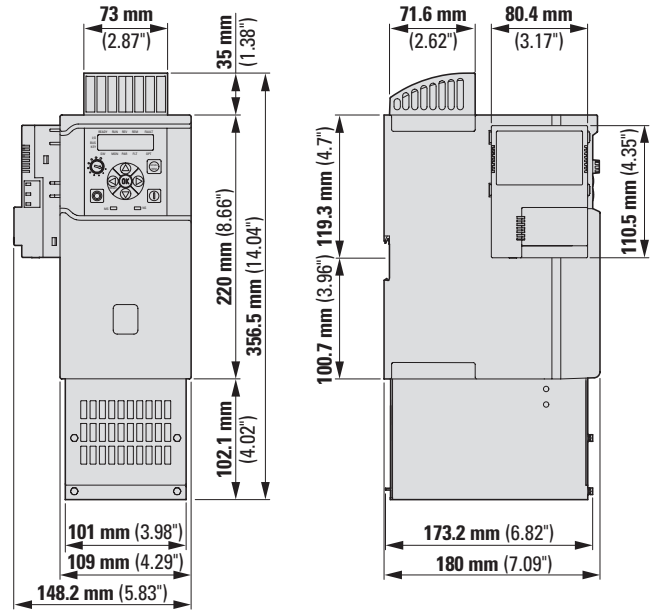

Frame size 3

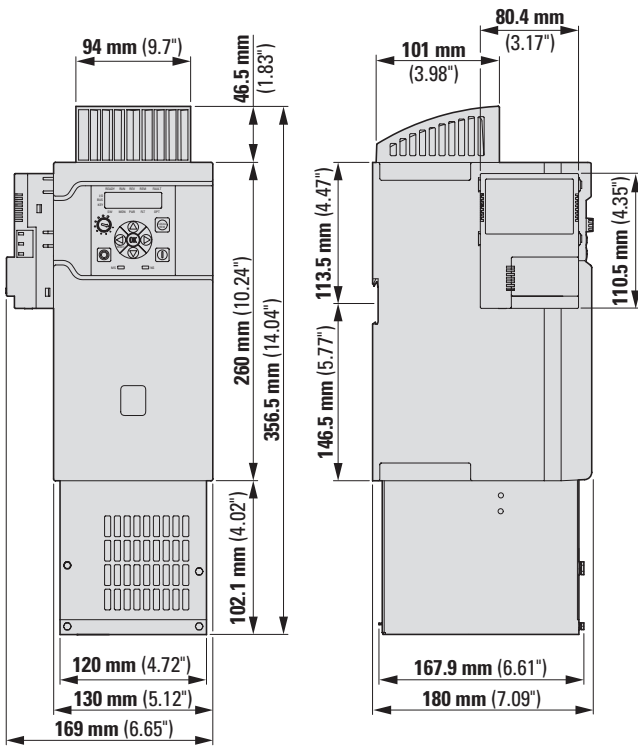


Frame size 4

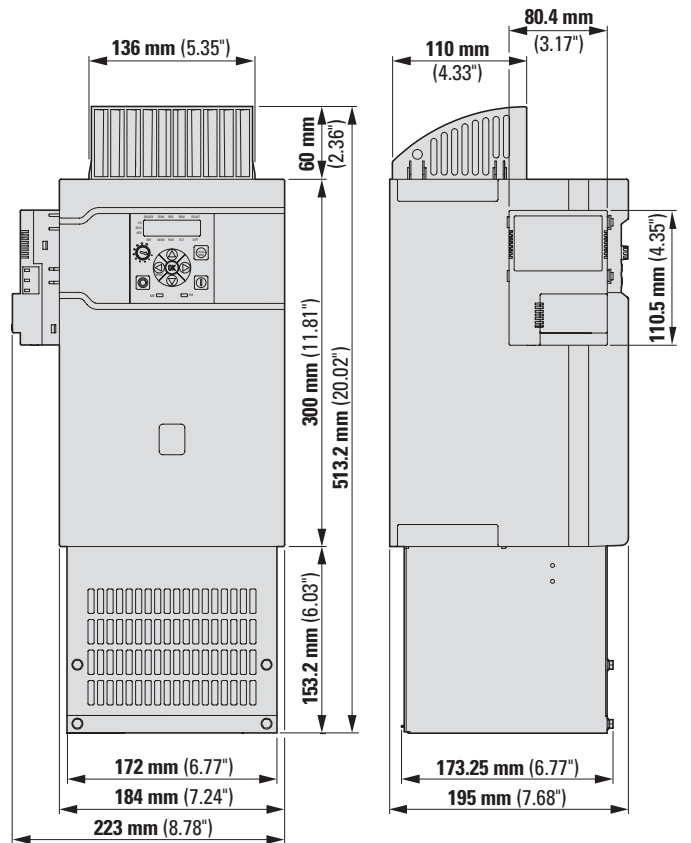


DM1

IP21 / NEMA1 Kit DM1 100 kA UL Plenum rating


Frame size 1

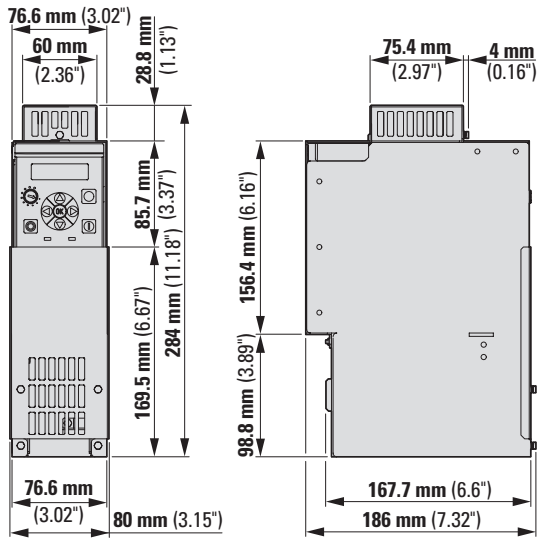


Frame size 2

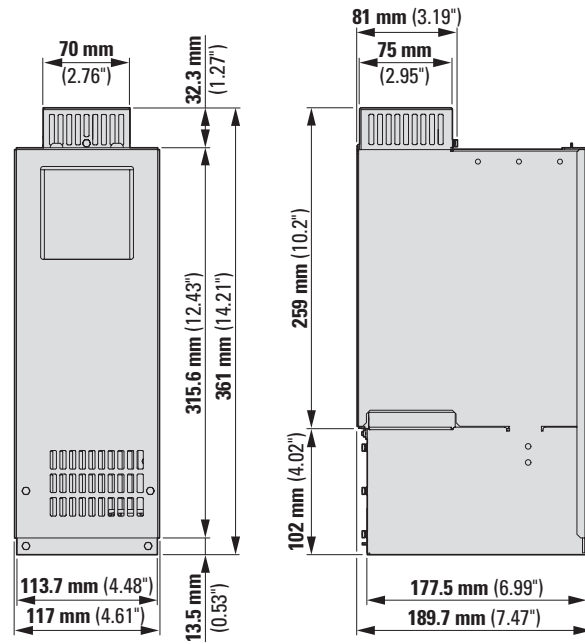

Frame size 3

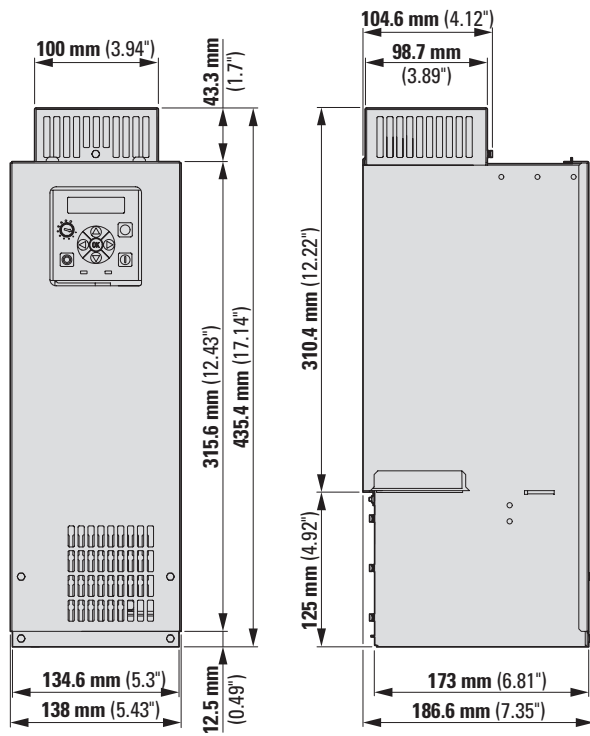

Frame size 4

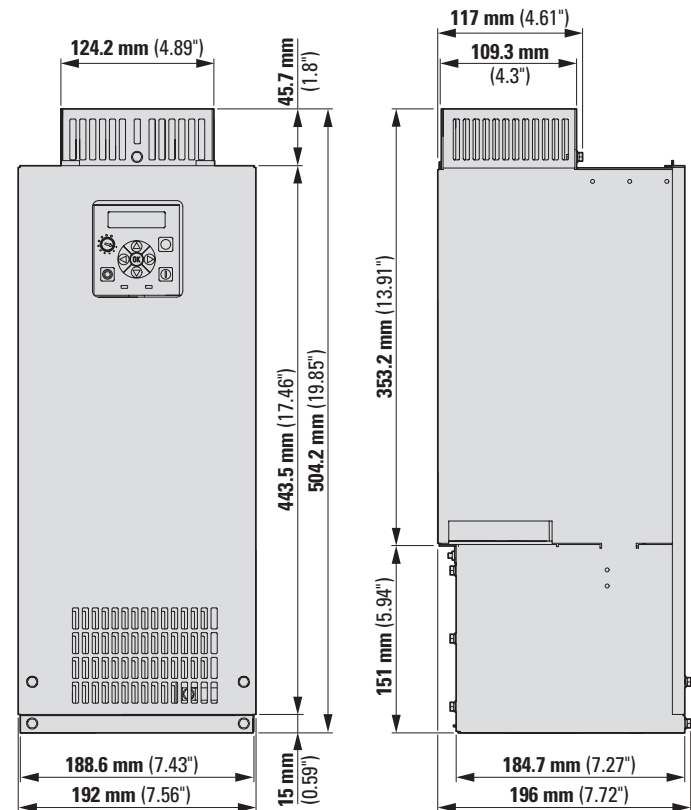


2.5


DM1 variable frequency drives up to 22 kW

Dimensions

DM1 Pro (PROFIBUS, CANOPEN, PROFINET) network interfaces

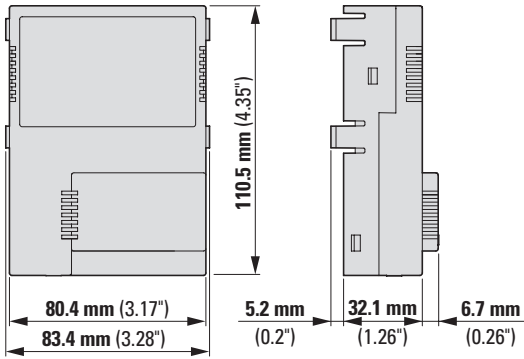

DM1 NEMA1 kit

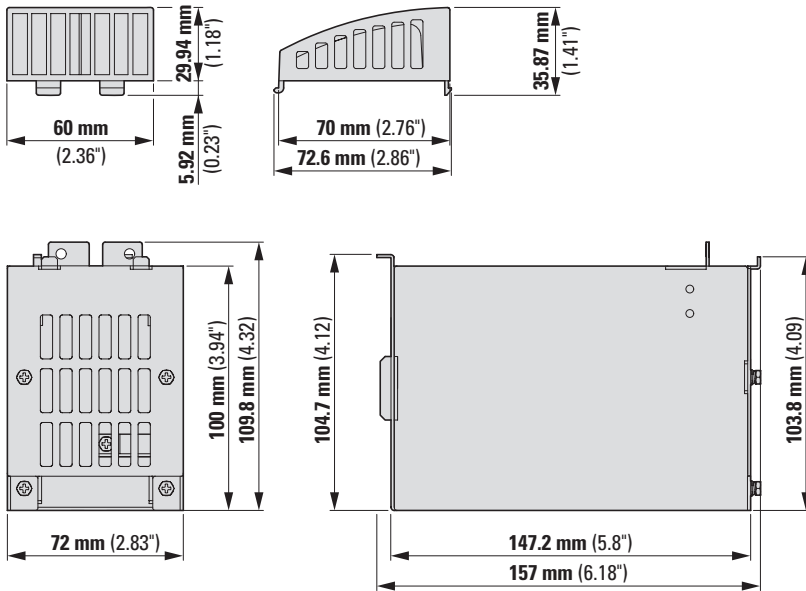

DM1



PowerXL DG1 variable frequency drives

General Purpose Drive

PowerXL DG1 general-purpose drives are variable frequency drives in Eaton's "Next-Generation PowerXL" series. They are specifically designed for modern, sophisticated applications.

Performance range:

- 0.75 - 90 kW (U_e : 3~ 230 V, U_2 : 3~ 230 V)
- 0.75 - 630 kW (U_e : 3~ 400 V, U_2 : 3~ 400 V)
- 2.2 - 800 HP (U_e : 3~ 575 V, U_2 : 3~ 575 V)

Applications:

- Multi-pump applications
- HVAC
- Roller and chain conveyors
- Compressors, mills
- Production machines
- Centrifuges and extruders
- Traction drives, conveyor belts
- Sawing, drilling, dosing unit drives
- Chemical and primary industries
- Water jet cutting, crushers

In fact, energy-saving algorithms, high short-circuit values, and a heavy-duty design all enable them to provide maximum efficiency, safety, and reliability.

Features:

- Ease of use: Startup Wizard, inControl PC Tool software, four built-in applications, diagnostics, local/remote button, removable keypad with copy/paste functionality.
- Communicative: Modbus RTU, Modbus TCP, Ethernet/IP and BacNet MS/TP Standard on each device. In addition, extensive I/O above the average for this device class.
- Efficiency: Active energy control algorithm, 5% DC choke, input surge protection, EMC filter built-in
- Rugged and reliable: Dual rating with high (CT) and low (VT) overload capability, conformal coated boards, brake chopper circuit.
- Durable metal power section, 50 °C rating (60 °C de-rating)
- Removable keypad rated IP54
- Global acceptance: UL, CE, cUL, RoHS, RCM

Accessory:

- Communication modules (PROFIBUS, PROFINET, CANopen, etc.)
- I/O expansions
- External keypad
- Motor chokes
- Sine filter
- Braking resistances
- Power Xpert inControl operating software
- DG1-remote keypad

DG1

For more information, visit:
Eaton.com/dg1



2.6 DG1 variable frequency drives up to 630 kW	
System overview	198
Key to type references	199
Ordering	200
DG1 for three-phase motors 230 V, three-phase	200
DG1 for three-phase motors 400 V, three-phase	202
DG1 for three-phase motors 575 V, three-phase	205
Accessories	208
Engineering	212
Assigned switching and protective elements for DG1	212
Connection examples	223
Technical specifications	224

2.6

DG1 variable frequency drives up to 630 kW

System overview

System overview



DG1

DG1-... 1
→ Page 200

Mounting frame DXG-ACC-FR... 2
→ Page 210

EMV filter DX-EMC... 3
→ Page 256


Braking resistances DX-BR... 4
→ Page 261

Mains chokes DX-LN... 5
Motor chokes DX-LM...
Harmonic filters DX-PHF...
Sine filters DX-SIN...
→ Page 254
→ Page 258
→ Page 255
→ Page 259

Expansions and communication cards DXG-EXT-... DXG-NET-... 6
→ Page 208

External keypad DXG-KEY-... 7
→ Page 210

Key to type references

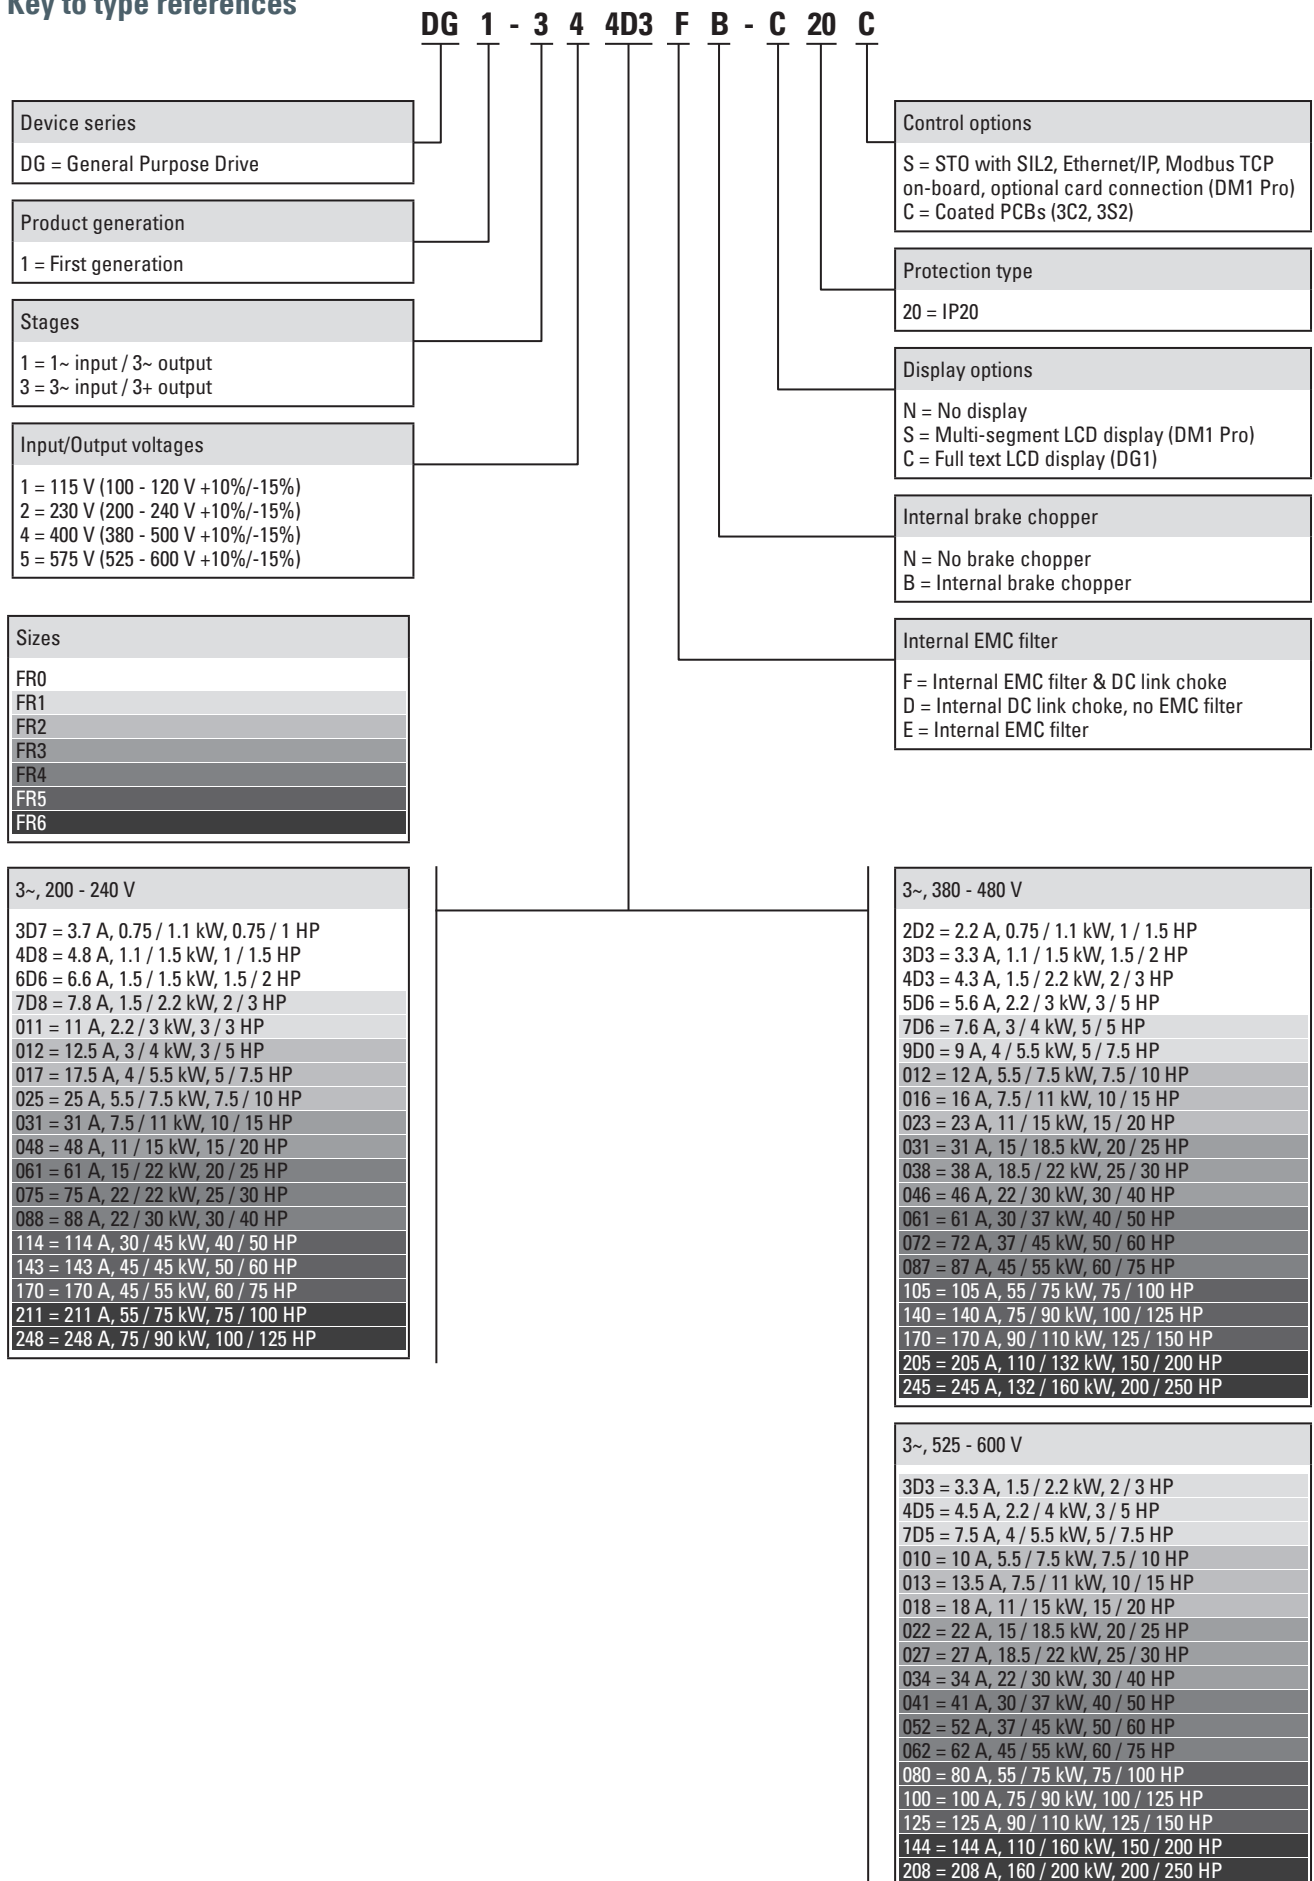

2.6

DG1 variable frequency drives up to 630 kW

DG1 for three-phase motors 230 V, three-phase supply

Ordering

Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150%$ I_e A	kW		HP	$I_n = 110%$ I_e A						kW	HP
U_e 230 V AC, three-phase / U₂ 230 V AC, three-phase, with BU, IP20												
Mains voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
3.7	0.75	0.75	4.8	1.1	1	✓	✓	–	FS0	IP20/NEMA0	DG1-323D7EB-C20C 9701-0200	1 unit
4.8	1.1	1	6.6	1.5	1.5	✓	✓	–			DG1-324D8EB-C20C 9701-0201	
6.6	1.5	1.5	7.8	1.5	2	✓	✓	–			DG1-326D6EB-C20C 9701-0202	
U_e 230 V AC, three-phase / U₂ 230 V AC, three-phase, with BU, IP21												
Mains voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
3.7	0.75	0.75	4.8	1.1	1	✓	✓	✓	FS1	IP21/NEMA1	DG1-323D7FB-C21C 9701-1002-00P	1 unit
4.8	1.1	1	6.6	1.5	1.5	✓	✓	✓			DG1-324D8FB-C21C 9701-1004-00P	
6.6	1.5	1.5	7.8	1.5	2	✓	✓	✓			DG1-326D6FB-C21C 9701-1006-00P	
7.8	1.5	2	11	2.2	3	✓	✓	✓			DG1-327D8FB-C21C 9701-1008-00P	
11	2.2	3	12.5	3	3	✓	✓	✓			DG1-32011FB-C21C 9701-1001-00P	
12.5	3	3	17.5	4	5	✓	✓	✓	FS2		DG1-32012FB-C21C 9701-2002-00P	
17.5	4	5	25	5.5	7.5	✓	✓	✓			DG1-32017FB-C21C 9701-2004-00P	
25	5.5	7.5	31	7.5	10	✓	✓	✓			DG1-32025FB-C21C 9701-2001-00P	
31	7.5	10	48	11	15	✓	✓	✓	FS3		DG1-32031FB-C21C 9701-3002-00P	
48	11	15	61	15	20	✓	✓	✓			DG1-32048FB-C21C 9701-3001-00P	
61	15	20	75	22	25	✓	✓	✓	FS4		DG1-32061FB-C21C 9701-4002-00P	
75	22	25	88	22	30	✓	✓	✓			DG1-32075FB-C21C 9701-4006-00P	
88	22	30	114	30	40	✓	✓	✓			DG1-32088FB-C21C 9701-4010-00P	
114	30	40	143	45	50	✓	✓	✓	FS5		DG1-32114FB-C21C 9701-5002-00P	
143	45	50	170	45	60	✓	✓	✓			DG1-32143FB-C21C 9701-5006-00P	
170	45	60	211	55	75	✓	✓	✓			DG1-32170FB-C21C 9701-5010-00P	
211	55	75	261	75	100	✓	✓	✓	FS6		DG1-32211FB-C21C 9701-6001-00P	
248	75	100	312	90	125	✓	✓	✓			DG1-32248FB-C21C 9701-6005-00P	
U_e 230 V AC, three-phase / U₂ 230 V AC, three-phase, without BU, IP21												
Mains voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
61	15	20	75	22	25	✓	–	✓	FS4	IP21/NEMA1	DG1-32061FN-C21C 9701-4004-00P	1 unit
75	22	25	88	22	30	✓	–	✓			DG1-32075FN-C21C 9701-4008-00P	
88	22	30	114	30	40	✓	–	✓			DG1-32088FN-C21C 9701-4001-00P	
114	30	40	143	45	50	✓	–	✓	FS5		DG1-32114FN-C21C 9701-5004-00P	
143	45	50	170	45	60	✓	–	✓			DG1-32143FN-C21C 9701-5008-00P	
170	45	60	211	55	75	✓	–	✓			DG1-32170FN-C21C 9701-5001-00P	
211	55	75	261	75	100	✓	–	✓	FS6		DG1-32211FN-C21C 9701-6003-00P	
248	75	100	312	90	125	✓	–	✓			DG1-32248FN-C21C 9701-6007-00P	

Notes

¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature

²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

DG1 for three-phase motors 230 V, three-phase supply

Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150%$ I_e A	kW HP		$I_n = 110%$ I_e A	kW HP						Radio interference suppression filter	Brake chopper
U₂ 230 V AC, three-phase / U₂ 230 V AC, three-phase, with BU, IP54												
Mains voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
3.7	0.75	0.75	4.8	1.1	1	✓	✓	✓	FS1	IP54/NEMA12	DG1-323D7FB-C54C 9701-1101-00P	1 unit
4.8	1.1	1	6.6	1.5	1.5	✓	✓	✓			DG1-324D8FB-C54C 9701-1103-00P	
6.6	1.5	1.5	7.8	1.5	2	✓	✓	✓			DG1-326D6FB-C54C 9701-1105-00P	
7.8	1.5	2	11	2.2	3	✓	✓	✓			DG1-327D8FB-C54C 9701-1107-00P	
11	2.2	3	12.5	3	3	✓	✓	✓			DG1-32011FB-C54C 9701-1109-00P	
12.5	3	3	17.5	4	5	✓	✓	✓	FS2		DG1-32012FB-C54C 9701-2101-00P	
17.5	4	5	25	5.5	7.5	✓	✓	✓			DG1-32017FB-C54C 9701-2103-00P	
25	5.5	7.5	31	7.5	10	✓	✓	✓			DG1-32025FB-C54C 9701-2105-00P	
31	7.5	10	48	11	15	✓	✓	✓	FS3		DG1-32031FB-C54C 9701-3101-00P	
48	11	15	61	15	20	✓	✓	✓			DG1-32048FB-C54C 9701-3103-00P	
61	15	20	75	22	25	✓	✓	✓	FS4		DG1-32061FB-C54C 9701-4101-00P	
75	22	25	88	22	30	✓	✓	✓			DG1-32075FB-C54C 9701-4105-00P	
88	22	30	114	30	40	✓	✓	✓			DG1-32088FB-C54C 9701-4109-00P	
114	30	40	143	45	50	✓	✓	✓	FS5		DG1-32114FB-C54C 9701-5101-00P	
143	45	50	170	45	60	✓	✓	✓			DG1-32143FB-C54C 9701-5105-00P	
170	45	60	211	55	75	✓	✓	✓			DG1-32170FB-C54C 9701-5109-00P	
211	55	75	261	75	100	✓	✓	✓	FS6		DG1-32211FB-C54C 9701-6101-00P	
248	75	100	312	90	125	✓	✓	✓			DG1-32248FB-C54C 9701-6105-00P	
U₂ 230 V AC, three-phase / U₂ 230 V AC, three-phase, without BU, IP54												
Mains voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
61	15	20	75	22	25	✓	-	✓	FS4	IP54/NEMA12	DG1-32061FN-C54C 9701-4103-00P	1 unit
75	22	25	88	22	30	✓	-	✓			DG1-32075FN-C54C 9701-4107-00P	
88	22	30	114	30	40	✓	-	✓			DG1-32088FN-C54C 9701-4111-00P	
114	30	40	143	45	50	✓	-	✓	FS5		DG1-32114FN-C54C 9701-5103-00P	
143	45	50	170	45	60	✓	-	✓			DG1-32143FN-C54C 9701-5107-00P	
170	45	60	211	55	75	✓	-	✓			DG1-32170FN-C54C 9701-5111-00P	
211	55	75	261	75	100	✓	-	✓	FS6		DG1-32211FN-C54C 9701-6103-00P	
248	75	100	312	90	125	✓	-	✓			DG1-32248FN-C54C 9701-6107-00P	

Notes

¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature

²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

2.6

DG1 variable frequency drives up to 630 kW

DG1 for three-phase motors 400 V, three-phase supply

Rated operational current ¹⁾	Assigned motor output ¹⁾²⁾³⁾		Rated operational current ¹⁾	Assigned motor output ¹⁾²⁾³⁾		Configuration			Frame size	Protection type	Model code Catalog number	Std. pack
	$I_n = 150\%$ I_e A	kW HP		$I_n = 110\%$ I_e A	kW HP	Radio interference suppression filter	Brake chopper	DC choke				
U_n 400 V AC, three-phase / U₂ 400 V AC, three-phase, with BU, IP20												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
2.2	0.75	1	3.3	1.1	1.5	✓	✓	–	FS0	IP20/NEMA0	DG1-342D2EB-C20C 9702-0200	1 unit
3.3	1.1	1.5	4.3	1.5	2	✓	✓	–			DG1-343D3EB-C20C 9702-0201	
4.3	1.5	2	5.6	2.2	3	✓	✓	–			DG1-344D3EB-C20C 9702-0202	
5.6	2.2	3	7.6	3	5	✓	✓	–			DG1-345D6EB-C20C 9702-0203	
U_n 400 V AC, three-phase / U₂ 400 V AC, three-phase, with BU, IP21												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
2.2	0.75	1	3.3	1.1	1.5	✓	✓	✓	FS1	IP21/NEMA1	DG1-342D2FB-C21C 9702-1002-00P	1 unit
3.3	1.1	1.5	4.3	1.5	2	✓	✓	✓			DG1-343D3FB-C21C 9702-1004-00P	
4.3	1.5	2	5.6	2.2	3	✓	✓	✓			DG1-344D3FB-C21C 9702-1006-00P	
5.6	2.2	3	7.6	3	5	✓	✓	✓			DG1-345D6FB-C21C 9702-1008-00P	
7.6	3	5	9	4	5	✓	✓	✓			DG1-347D6FB-C21C 9702-1001-00P	
9	4	5	12	5.5	7.5	✓	✓	✓			DG1-349D0FB-C21C 9702-1011-00P	
12	5.5	7.5	16	7.5	10	✓	✓	✓	FS2		DG1-34012FB-C21C 9702-2002-00P	
16	7.5	10	23	11	15	✓	✓	✓			DG1-34016FB-C21C 9702-2004-00P	
23	11	15	31	15	20	✓	✓	✓			DG1-34023FB-C21C 9702-2001-00P	
31	15	20	38	18.5	25	✓	✓	✓	FS3		DG1-34031FB-C21C 9702-3002-00P	
38	18.5	25	46	22	30	✓	✓	✓			DG1-34038FB-C21C 9702-3004-00P	
46	22	30	61	30	40	✓	✓	✓			DG1-34046FB-C21C 9702-3001-00P	
61	30	40	72	37	50	✓	✓	✓	FS4		DG1-34061FB-C21C 9702-4002-00P	
72	37	50	87	45	60	✓	✓	✓			DG1-34072FB-C21C 9702-4006-00P	
87	45	60	105	55	75	✓	✓	✓			DG1-34087FB-C21C 9702-4010-00P	
105	55	75	140	75	100	✓	✓	✓	FS5		DG1-34105FB-C21C 9702-5002-00P	
140	75	100	170	90	125	✓	✓	✓			DG1-34140FB-C21C 9702-5006-00P	
170	90	125	205	110	150	✓	✓	✓			DG1-34170FB-C21C 9702-5010-00P	
205	110	150	261	132	200	✓	✓	✓	FS6		DG1-34205FB-C21C 9702-6001-00P	
245	132	200	310	160	250	✓	✓	✓			DG1-34245FB-C21C 9702-6005-00P	

Notes

¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature

²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

DG1 for three-phase motors 400 V, three-phase supply

Rated operational current ¹⁾	Assigned motor output ¹⁾²⁾³⁾		Rated operational current ¹⁾	Assigned motor output ¹⁾²⁾³⁾		Configuration			Frame size	Protection type	Model code Catalog number	Std. pack
	$I_n = 150\%$ I_e A	kW HP		$I_n = 110\%$ I_e A	kW HP	Radio interference suppression filter	Brake chopper	DC choke				
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, with BU, IP00												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
310	160	250	385	200	300	✓	✓	✓	FS7	IP00	DG1-34310FB-C00C 3-4917-102A	
385	200	300	460	250	350	✓	✓	✓			DG1-34385FB-C00C 3-4917-104A	
460	250	350	520	250	450	✓	✓	✓			DG1-34460FB-C00C 3-4917-106A	
520	250	450	590	315	500	✓	✓	✓			DG1-34520FB-C00C 3-4917-108A	
590	315	500	650	355	500	✓	✓	✓	FS8		DG1-34590FB-C00C 3-4918-102A	
650	355	500	730	400	600	✓	✓	✓			DG1-34650FB-C00C 3-4918-104A	
730	400	600	820	450	600	✓	✓	✓			DG1-34730FB-C00C 3-4918-106A	
820	450	600	920	500	750	✓	✓	✓			DG1-34820FB-C00C 3-4918-108A	
920	500	750	1010	560	750	✓	✓	✓			DG1-34920FB-C00C 3-4918-110A	
920	500	750	1180	630	850	✓	✓	✓			DG1-341K0FB-C00C 3-4918-112A	
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, without BU, IP21												
Supply voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
61	30	40	72	37	50	✓	-	✓	FS4	IP21/NEMA1	DG1-34061FN-C21C 9702-4004-00P	1 unit
72	37	50	87	45	60	✓	-	✓			DG1-34072FN-C21C 9702-4008-00P	
87	45	60	105	55	75	✓	-	✓			DG1-34087FN-C21C 9702-4001-00P	
105	55	75	140	75	100	✓	-	✓	FS5		DG1-34105FN-C21C 9702-5004-00P	
140	75	100	170	90	125	✓	-	✓			DG1-34140FN-C21C 9702-5008-00P	
170	90	125	205	110	150	✓	-	✓			DG1-34170FN-C21C 9702-5001-00P	
205	110	150	261	132	200	✓	-	✓	FS6		DG1-34205FN-C21C 9702-6003-00P	
245	132	200	310	160	250	✓	-	✓			DG1-34245FN-C21C 9702-6007-00P	
Notes ¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz ³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz												
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, without BU, IP00												
Supply voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
310	160	250	385	200	300	✓	✓	✓	FS7	IP00	DG1-34310FN-C00C 3-4917-101A	1 unit
385	200	300	460	250	350	✓	✓	✓			DG1-34385FN-C00C 3-4917-103A	
460	250	350	520	250	450	✓	✓	✓			DG1-34460FN-C00C 3-4917-105A	
520	250	450	590	315	500	✓	✓	✓			DG1-34520FN-C00C 3-4917-107A	
590	315	500	650	355	500	✓	✓	✓	FS8		DG1-34590FN-C00C 3-4918-101A	
650	355	500	730	400	600	✓	✓	✓			DG1-34650FN-C00C 3-4918-103A	
730	400	600	820	450	600	✓	✓	✓			DG1-34730FN-C00C 3-4918-105A	
820	450	600	920	500	750	✓	✓	✓			DG1-34820FN-C00C 3-4918-107A	
920	500	750	1010	560	750	✓	✓	✓			DG1-34920FN-C00C 3-4918-109A	
920	500	750	1180	630	850	✓	✓	✓			DG1-341K0FN-C00C 3-4918-111A	

2.6

DG1 variable frequency drives up to 630 kW

DG1 for three-phase motors 400 V, three-phase supply

Rated operational current ¹⁾ I _n = 150% I _e A	Assigned motor output ¹⁾²⁾³⁾		Rated operational current ¹⁾ I _n = 110% I _e A	Assigned motor output ¹⁾²⁾³⁾		Configuration			Frame size	Protection type	Model code Catalog number	Std. pack
	kW	HP		kW	HP	Radio interference suppression filter	Brake chopper	DC choke				
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, with BU, IP54												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
2.2	0.75	1	3.3	1.1	1.5	✓	✓	✓	FS1	IP54/NEMA12	DG1-342D2FB-C54C 9702-1101-00P	1 unit
3.3	1.1	1.5	4.3	1.5	2	✓	✓	✓			DG1-343D3FB-C54C 9702-1103-00P	
4.3	1.5	2	5.6	2.2	3	✓	✓	✓			DG1-344D3FB-C54C 9702-1105-00P	
5.6	2.2	3	7.6	3	5	✓	✓	✓			DG1-345D6FB-C54C 9702-1107-00P	
7.6	3	5	9	4	5	✓	✓	✓			DG1-347D6FB-C54C 9702-1109-00P	
9	4	5	12	5.5	7.5	✓	✓	✓			DG1-349D0FB-C54C 9702-1111-00P	
12	5.5	7.5	16	7.5	10	✓	✓	✓	FS2		DG1-34012FB-C54C 9702-2101-00P	
16	7.5	10	23	11	15	✓	✓	✓			DG1-34016FB-C54C 9702-2103-00P	
23	11	15	31	15	20	✓	✓	✓			DG1-34023FB-C54C 9702-2105-00P	
31	15	20	38	18.5	25	✓	✓	✓	FS3		DG1-34031FB-C54C 9702-3101-00P	
38	18.5	25	46	22	30	✓	✓	✓			DG1-34038FB-C54C 9702-3103-00P	
46	22	30	61	30	40	✓	✓	✓			DG1-34046FB-C54C 9702-3105-00P	
61	30	40	72	37	50	✓	✓	✓	FS4		DG1-34061FB-C54C 9702-4101-00P	
72	37	50	87	45	60	✓	✓	✓			DG1-34072FB-C54C 9702-4105-00P	
87	45	60	105	55	75	✓	✓	✓			DG1-34087FB-C54C 9702-4109-00P	
105	55	75	140	75	100	✓	✓	✓	FS5		DG1-34105FB-C54C 9702-5101-00P	
140	75	100	170	90	125	✓	✓	✓			DG1-34140FB-C54C 9702-5105-00P	
170	90	125	205	110	150	✓	✓	✓			DG1-34170FB-C54C 9702-5109-00P	
205	110	150	261	132	200	✓	✓	✓	FS6		DG1-34205FB-C54C 9702-6101-00P	
245	132	200	310	160	250	✓	✓	✓			DG1-34245FB-C54C 9702-6105-00P	
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, without BU, IP54												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
61	30	40	72	37	50	✓	-	✓	FS4	IP54/NEMA12	DG1-34061FN-C54C 9702-4103-00P	1 unit
72	37	50	87	45	60	✓	-	✓			DG1-34072FN-C54C 9702-4107-00P	
87	45	60	105	55	75	✓	-	✓			DG1-34087FN-C54C 9702-4111-00P	
105	55	75	140	75	100	✓	-	✓	FS5		DG1-34105FN-C54C 9702-5103-00P	
140	75	100	170	90	125	✓	-	✓			DG1-34140FN-C54C 9702-5107-00P	
170	90	125	205	110	150	✓	-	✓			DG1-34170FN-C54C 9702-5111-00P	
205	110	150	261	132	200	✓	-	✓	FS6		DG1-34205FN-C54C 9702-6103-00P	
245	132	200	310	160	250	✓	-	✓			DG1-34245FN-C54C 9702-6107-00P	

Notes

¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature

²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

DG1 for three-phase motors 575 V, three-phase supply

Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW		HP	$I_n = 110\%$ I_e A						kW	HP
U_n 575 V AC, three-phase / U₂ 575 V AC, three-phase, with BU, IP21												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
3.3	1.5	2	4.5	2.2	3	✓	✓	✓	FS1	IP21/NEMA1	DG1-353D3FB-C21C 9703-1002-00P	1 unit
4.5	2.2	3	7.5	4	5	✓	✓	✓			DG1-354D5FB-C21C 9703-1004-00P	
7.5	4	5	10	5.5	7.5	✓	✓	✓			DG1-357D5FB-C21C 9703-1006-00P	
10	5.5	7.5	13.5	7.5	10	✓	✓	✓	FS2		DG1-35010FB-C21C 9703-2002-00P	
13.5	7.5	10	18	11	15	✓	✓	✓			DG1-35013FB-C21C 9703-2004-00P	
18	11	15	22	15	20	✓	✓	✓			DG1-35018FB-C21C 9703-2006-00P	
22	15	20	27	18.5	25	✓	✓	✓	FS3		DG1-35022FB-C21C 9703-3002-00P	
27	18.5	25	34	22	30	✓	✓	✓			DG1-35027FB-C21C 9703-3004-00P	
34	22	30	41	30	40	✓	✓	✓			DG1-35034FB-C21C 9703-3006-00P	
41	30	40	52	37	50	✓	✓	✓	FS4		DG1-35041FB-C21C 9703-4002-00P	
52	37	50	62	45	60	✓	✓	✓			DG1-35052FB-C21C 9703-4006-00P	
62	45	60	80	55	75	✓	✓	✓			DG1-35062FB-C21C 9703-4010-00P	
80	55	75	100	75	100	✓	✓	✓	FS5		DG1-35080FB-C21C 9703-5002-00P	
100	75	100	125	90	125	✓	✓	✓			DG1-35100FB-C21C 9703-5006-00P	
125	90	125	144	110	150	✓	✓	✓			DG1-35125FB-C21C 9703-5010-00P	
144	110	150	208	160	200	✓	✓	✓	FS6		DG1-35144FB-C21C 9703-6002-00P	
208	160	200	250	200	250	✓	✓	✓			DG1-35208FB-C21C 9703-6005-00P	
U_n 575 V AC, three-phase / U₂ 575 V AC, three-phase, without BU, IP21												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
41	30	40	52	37	50	✓	-	✓	FS4	IP21/NEMA1	DG1-35041FN-C21C 9703-4004-00P	1 unit
52	37	50	62	45	60	✓	-	✓			DG1-35052FN-C21C 9703-4008-00P	
62	45	60	80	55	75	✓	-	✓			DG1-35062FN-C21C 9703-4012-00P	
80	55	75	100	75	100	✓	-	✓	FS5		DG1-35080FN-C21C 9703-5004-00P	
100	75	100	125	90	125	✓	-	✓			DG1-35100FN-C21C 9703-5008-00P	
125	90	125	144	110	150	✓	-	✓			DG1-35125FN-C21C 9703-5012-00P	
144	110	150	208	160	200	✓	-	✓	FS6		DG1-35144FN-C21C 9703-6004-00P	
208	160	200	250	200	250	✓	-	✓			DG1-35208FN-C21C 9703-6006-00P	

Notes

¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature

²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

2.6

DG1 variable frequency drives up to 630 kW

DG1 for three-phase motors 575 V, three-phase supply

Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW HP		$I_n = 110\%$ I_e A	kW HP						Radio interference suppression filter	Brake chopper
U₁ 575 V AC, three-phase / U₂ 575 V AC, three-phase, with BU, IP54												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
3.3	1.5	2	4.5	2.2	3	✓	✓	✓	FS1	IP54/NEMA12	DG1-353D3FB-C54C 9703-1102-00P	1 unit
4.5	2.2	3	7.5	4	5	✓	✓	✓			DG1-354D5FB-C54C 9703-1104-00P	
7.5	4	5	10	5.5	7.5	✓	✓	✓			DG1-357D5FB-C54C 9703-1106-00P	
10	5.5	7.5	13.5	7.5	10	✓	✓	✓	FS2		DG1-35010FB-C54C 9703-2102-00P	
13.5	7.5	10	18	11	15	✓	✓	✓			DG1-35013FB-C54C 9703-2104-00P	
18	11	15	22	15	20	✓	✓	✓			DG1-35018FB-C54C 9703-2106-00P	
22	15	20	27	18.5	25	✓	✓	✓	FS3		DG1-35022FB-C54C 9703-3102-00P	
27	18.5	25	34	22	30	✓	✓	✓			DG1-35027FB-C54C 9703-3104-00P	
34	22	30	41	30	40	✓	✓	✓			DG1-35034FB-C54C 9703-3106-00P	
41	30	40	52	37	50	✓	✓	✓	FS4		DG1-35041FB-C54C 9703-4102-00P	
52	37	50	62	45	60	✓	✓	✓			DG1-35052FB-C54C 9703-4106-00P	
62	45	60	80	55	75	✓	✓	✓			DG1-35062FB-C54C 9703-4110-00P	
80	55	75	100	75	100	✓	✓	✓	FS5		DG1-35080FB-C54C 9703-5102-00P	
100	75	100	125	90	125	✓	✓	✓			DG1-35100FB-C54C 9703-5106-00P	
125	90	125	144	110	150	✓	✓	✓			DG1-35125FB-C54C 9703-5110-00P	
144	110	150	208	160	200	✓	✓	✓	FS6		DG1-35144FB-C54C 9703-6102-00P	
208	160	200	250	200	250	✓	✓	✓			DG1-35208FB-C54C 9703-6105-00P	
U₁ 575 V AC, three-phase / U₂ 575 V AC, three-phase, without BU, IP54												
Supply voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
41	30	40	52	37	50	✓	✓		FS4	IP54/NEMA12	DG1-35041FN-C54C 9703-4104-00P	1 unit
52	37	50	62	45	60	✓	✓				DG1-35052FN-C54C 9703-4108-00P	
62	45	60	80	55	75	✓	✓				DG1-35062FN-C54C 9703-4112-00P	
80	55	75	100	75	100	✓	✓		FS5		DG1-35080FN-C54C 9703-5104-00P	
100	75	100	125	90	125	✓	✓				DG1-35100FN-C54C 9703-5108-00P	
125	90	125	144	110	150	✓	✓				DG1-35125FN-C54C 9703-5112-00P	
144	110	150	208	160	200	✓	✓		FS6		DG1-35144FN-C54C 9703-6104-00P	
208	160	200	250	200	250	✓	✓				DG1-35208FN-C54C 9703-6106-00P	

Rated operational current ¹⁾ $I_n = 150\%$ I_e A	Assigned motor output ¹⁾²⁾³⁾		Rated operational current ¹⁾ $I_n = 110\%$ I_e A	Assigned motor output ¹⁾²⁾³⁾		Configuration Radio interference suppression filter Brake chopper DC choke	Frame size	Protection type	Model code Catalog number	Std. pack	
	kW	HP		kW	HP						
U₂ 575 V AC, three-phase / U₂ 575 V AC, three-phase, with BU, IP00											
Supply voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V											
261	200	250	325	250	300	✓	✓	FS7	IP00	DG1-35261FB-C00C 3-4917-304A	1 unit
325	250	300	385	315	400	✓	✓			DG1-35325FB-C00C 3-4917-306A	
385	315	400	416	315	450	✓	✓			DG1-35385FB-C00C 3-4917-308A	
416	315	450	460	355	450	✓	✓	FS8		DG1-35416FB-C00C 3-4918-302A	
460	355	450	520	400	500	✓	✓			DG1-35460FB-C00C 3-4918-304A	
520	400	500	590	450	600	✓	✓			DG1-35520FB-C00C 3-4918-306A	
590	450	600	650	500	600	✓	✓			DG1-35590FB-C00C 3-4918-308A	
650	500	600	750	560	750	✓	✓			DG1-35650FB-C00C 3-4918-310A	
650	500	600	820	630	750	✓	✓			DG1-35820FB-C00C 3-4918-312A	
U₂ 575 V AC, three-phase / U₂ 575 V AC, three-phase, without BU, IP00											
Supply voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V											
261	200	250	325	250	300	✓	✓	FS7	IP00	DG1-35261FN-C00C 3-4917-303A	
325	250	300	385	315	400	✓	✓			DG1-35325FN-C00C 3-4917-305A	
385	315	400	416	315	450	✓	✓			DG1-35385FN-C00C 3-4918-301A	
416	315	450	460	355	450	✓	✓	FS8		DG1-35416FN-C00C 3-4918-301A	
460	355	450	520	400	500	✓	✓			DG1-35460FN-C00C 3-4918-303A	
520	400	500	590	450	600	✓	✓			DG1-35520FN-C00C 3-4918-305A	
590	450	600	650	500	600	✓	✓			DG1-35590FN-C00C 3-4918-307A	
650	500	600	750	560	750	✓	✓			DG1-35650FN-C00C 3-4918-309A	
650	500	600	820	630	750	✓	✓			DG1-35820FN-C00C 3-4918-311A	

Notes

¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature

²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz







³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

2.6






DG1 variable frequency drives up to 630 kW

Accessories




Accessories

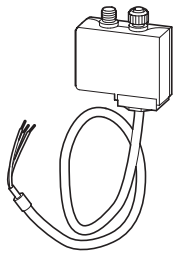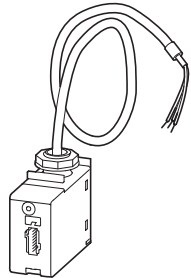	Description	For use with	Model code Catalog number	Std. pack
Network interfaces				
	Networking: PROFINET	DG1, DH1	DXG-NET-PROFINET EP-400003	1 unit
	Networking: PROFIBUS		DXG-NET-PROFIBUS 744-A2617-00P	
	Networking: SWD-IP54		DXG-NET-SWD-IP54 744-F0191-00P	
	Networking: CANOPEN		DXG-NET-CANOPEN 744-F0116-00P	
	Networking: SWD-IP20		DXG-NET-SWD-IP20 744-F0190-00P	
	D-sub adapter on terminals		DXG-MNT-PROFIBUS 744-A2618-00P	

I/O expansions

	I/O expansion: THER1	DG1, DH1	DXG-EXT-THER1 744-A2615-00P	1 unit
	I/O expansion: 3RO		DXG-EXT-3RO 744-A2614-00P	
	I/O expansion: 3DI3DO1T		DXG-EXT-3DI3DO1T 744-A2612-00P	
	I/O expansion: 1AI2AO		DXG-EXT-1AI2AO 744-A2613-00P	
	I/O expansion: 6DI		DXG-EXT-6DI 744-A2616-00P	



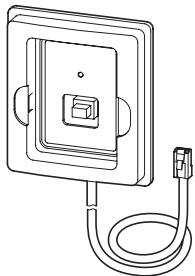



Keypad options

	Remote keypad mounting frame	DG1, DH1, DM1	DXG-KEY-HOLDER 730-32032-00P	1 unit
	Remote keypad kit (3 m cable)		DXG-KEY-RMTKIT 730-32033-00P	
	Type12/IP54 keypad stopper		DXG-KEY-N12PLUG 730-32038-00P	
	Standard keypad		DXG-KEY-LCD 730-32047-00P	
	RJ45 male-to-male keypad connector		DXG-SPR-KEYM2M 744-S0000-00P	

2.6

DG1 variable frequency drives up to 630 kW

Accessories

IP54 keypad adapter				
	IP54 keypad cable adapter	DG1, DH1	DXG-KEY-N12CON 199366	1 unit
Battery				
	Spare battery	DG1, DH1	DXG-ACC-RTBATT 730-32039-00P	1 unit
Cable				
	RJ45 cable, 1m	DG1, DH1	DXG-CBL-1M0 730-32034-00P	1 unit
	RJ45 cable, 3m		DXG-CBL-3M0 730-32035-00P	
	USB to RJ45 cable, 1.5m	DG1, DH1, DM1, DX1	DXX-CBL-PCCABLE 3-5975-001A	
Unit-through mounting frames				
	Unit-through frame, frame size 1	DG1, DH1	DXG-ACC-FR1N12FK 730-32022-00P	1 unit
	Unit-through frame, frame size 2		DXG-ACC-FR2N12FK 730-32023-00P	
	Unit-through frame, frame size 3		DXG-ACC-FR3N12FK 730-32024-00P	
	Unit-through frame, frame size 4		DXG-ACC-FR4N12FK 730-32025-00P	
	Unit-through frame, frame size 5		DXG-ACC-FR5N12FK 730-32026-00P	
	Unit-through frame, frame size 6		DXG-ACC-FR6N12FK 744-A3845-00P	
IP21 to IP54 retrofit kit, frame size 1 and frame size 2				
	Retrofit kit for conversion to IP54/NEMA12, frame size 1, 400 V	DG1, DH1	DXG-ACC-4FR1N12KIT 730-32029-00P	1 unit
	Retrofit kit for conversion to IP54/NEMA12, frame size 1, 230 V		DXG-ACC-2FR1N12KIT 744-A2815-00P	
	Retrofit kit for conversion to IP54/NEMA12, frame size 2		DXG-ACC-FR2N12KIT 730-32030-00P	

2.6

DG1 variable frequency drives up to 630 kW

Assigned switching and protective elements for DG1

Engineering

Model code	power rating 110 % kW	input current 110 % A	output current 110 % A	power rating 150 % kW	input current 150 % A	output current 150 % A	MCCB Type 1 coordination @ 110 %	Fuse Type 1 coordination @ 110 %	MCCB Type 1 coordination @ 150 %	Fuse Type 1 coordination @ 150 %
230 V AC, three-phase/230 V AC, three-phase										
DG1-323D7EB-C20C	1.1	5.6	4.8	0.75	4.3	3.7	PKZM0-6,3	C10G8	PKZM0-10	C10G10
DG1-324D8EB-C20C	1.5	7.6	6.6	1.1	5.6	4.8	PKZM0-10	C10G10	PKZM0-10	C10G10
DG1-326D6EB-C20C	1.5	9	7.8	1.5	7.6	6.6	PKZM0-10	C10G10	PKZM0-12	C10G12
DG1-323D7...	1.1	4.4	4.8	0.75	3.2	3.7	PKZM0-6,3	C10G8	PKZM0-6,3	C10G8
DG1-324D8...	1.5	6.1	6.6	1.1	4.4	4.8	PKZM0-10	C10G10	PKZM0-10	C10G10
DG1-326D6...	1.5	7.2	7.8	1.5	6.1	6.6	PKZM0-10	C10G10	PKZM0-10	C10G10
DG1-327D8...	2.2	10.2	11	1.5	7.2	7.8	PKZM0-12	C10G12	PKZM0-12	C10G12
DG1-32011...	3	11.6	12.5	2.2	10.2	11	PKZM0-16	C10G16	PKZM0-16	C10G16
DG1-32012...	4	16.3	17.5	3	10.2	12.5	PKZM0-20	C10G20	PKZM0-16	C10G16
DG1-32017...	5.5	23.2	25	4	16.2	17.5	PKZM0-32	C10G32	PKZM0-25	C10G25
DG1-32025...	7.5	29	31	5.5	23.1	25	PKZM0-32	C10G32	PKZM4-40	C22G40
DG1-32031...	11	44.2	48	7.5	28.7	31	PKZM4-50	C22G50	PKZM4-50	C22G50
DG1-32048...	15	56	61	11	44.4	48	PKZM4-63	C22G63	NZMC1-A80	C22G80
DG1-32061...	22	64.6	75	15	56.4	61	NZMC1-A80	C22G80	NZMC1-A100	C22G100
DG1-32075...	22	78	88	22	69.4	75	NZMC1-A100	C22G100	NZMC1-A125	C22G125
DG1-32088...	30	94.3	114	22	81.4	88	NZMC1-A125	C22G125	NZMC1-A125	C22G125
DG1-32114...	45	129	143	30	105.5	114	NZMC1-A160	160NHG02B-400	NZMC1-A160	160NHG02B-400
DG1-32143...	45	157	170	45	132.3	143	NZMC2-A200	200NHG02B-400	NZMC2-A200	200NHG02B-400
DG1-32170...	55	189	211	45	157.3	170	NZMC2-A250	250NHG02B-400	NZMC2-A250	250NHG02B-400
DG1-32211...	75	242.8	261	55	196.3	211	NZMC2-A300	315NHG2B-400	NZMC2-A300	315NHG2B-400
DG1-32248...	90	290.3	312	75	230.7	248	NZMC3-A400	400NHG03B-400	NZMC3-A400	400NHG03B-400
400 V AC, three-phase/400 V AC, three-phase										
DG1-342D2EB-C20C	1.1	4.3	3.3	0.75	2.7	2.2	PKZM0-6,3	C10G8	PKZM0-6,3	C10G8
DG1-343D3EB-C20C	1.5	5.5	4.3	1.1	4.3	3.3	PKZM0-6,3	C10G8	PKZM0-10	C10G10
DG1-344D3EB-C20C	2.2	7.1	5.6	1.5	5.5	4.3	PKZM0-10	C10G10	PKZM0-10	C10G10
DG1-345D6EB-C20C	3	9.6	7.6	2.2	7.1	5.6	PKZM0-12	C10G12	PKZM0-12	C10G12
DG1-342D2...	1.1	3.1	3.3	0.75	2	2.2	PKZM0-6,3	C10G8	PKZM0-6,3	C10G8
DG1-343D3...	1.5	4	4.3	1.1	3.1	3.3	PKZM0-6,3	C10G8	PKZM0-6,3	C10G8
DG1-344D3...	2.2	5.2	5.6	1.5	4	4.3	PKZM0-6,3	C10G8	PKZM0-10	C10G10
DG1-345D6...	3	7.1	7.6	2.2	5.2	5.6	PKZM0-10	C10G10	PKZM0-10	C10G10
DG1-347D6...	4	8.4	9	3	7.1	7.6	PKZM0-10	C10G10	PKZM0-12	C10G12
DG1-349D0...	5.5	11.2	12	4	8.4	9	PKZM0-16	C10G16	PKZM0-16	C10G16
DG1-34012...	7.5	15	16	5.5	11.2	12	PKZM0-20	C10G20	PKZM0-25	C10G25
DG1-34016...	11	21.5	23	7.5	14.9	16	PKZM0-25	C10G25	PKZM0-25	C10G25
DG1-34023...	15	29	31	11	21.4	23	PKZM0-32	C10G32	PKZM4-40	C22G40
DG1-34031...	18.5	35.2	38	15	28.8	31	PKZM4-40	C22G40	PKZM4-50	C22G50
DG1-34038...	22	42.6	46	18.5	35.3	38	PKZM4-50	C22G50	PKZM4-63	C22G63
DG1-34046...	30	55.7	61	22	42.8	46	PKZM4-63	C22G63	NZMC1-A80	C22G80
DG1-34061...	37	65.7	72	30	56.7	61	NZMC1-A80	C22G80	NZMC1-A100	C22G100
DG1-34072...	45	79.4	87	37	66.9	72	NZMC1-A100	C22G100	NZMC1-A125	C22G125
DG1-34087...	55	97	105	45	80.9	87	NZMC1-A125	C22G125	NZMC1-A125	C22G125
DG1-34105...	75	129	140	55	97.6	105	NZMC1-A160	160NHG02B-400	NZMC1-A160	160NHG02B-400
DG1-34140...	90	157	170	75	130.1	140	NZMC2-A200	200NHG02B-400	NZMC2-A200	200NHG02B-400
DG1-34170...	110	189	205	90	158	170	NZMC2-A250	250NHG02B-400	NZMC2-A250	250NHG02B-400
DG1-34205...	132	246.2	261	110	193.4	205	NZMC2-A300	315NHG2B-400	NZMC2-A300	315NHG2B-400
DG1-34245...	160	292.4	310	132	231.1	245	NZMC3-A400	400NHG03B-400	NZMC3-A400	400NHG03B-400
DG1-34310...	200	385	385	160	311	310	NZMC3-A500	500NHG3B-400	NZMC3-A500	500NHG3B-400
DG1-34385...	250	460	460	200	391	385	NZMN4-AX630	630NHG3B-400	NZMN4-AX630	630NHG3B-400
DG1-34460...	250	520	520	250	459	460	NZMN4-AX630	630NHG3B-400	NZMN4-AX800	800NHG4G
DG1-34520...	315	590	590	250	515	520	NZMN4-AX800	800NHG4G	NZMN4-AX800	800NHG4G
DG1-34590...	355	648	650	315	587	590	NZMN4-AX800	800NHG4G	NZMN4-AX1000	1000NHG4G
DG1-34650...	400	724	730	355	642	650	NZMN4-AX800	800NHG4G	NZMN4-AX1000	1000NHG4G
DG1-34730...	450	822	820	400	731	730	NZMN4-AX1000	1000NHG4G	NZMN4-AX1250	1250NHG4G
DG1-34820...	500	916	920	450	815	820	NZMN4-AX1250	1250NHG4G	NZMN4-AX1250	1250NHG4G
DG1-34920...	560	1030	1010	500	908	920	NZMN4-AX1250	1250NHG4G	NZMN4-AX1600	170M8557D
DG1-341K0...	630	1164	1180	500	908	920	NZMN4-AX1600	170M8557D	NZMN4-AX1600	170M8557D

Assigned switching and protective elements for DG1

minimum braking resistance brake resistor, 10 % duty cycle @ 110 % brake resistor, 20 % duty cycle @ 110 % brake resistor, 40 % duty cycle @ 110 % brake resistor, 10 % duty cycle @ 150 % brake resistor, 20 % duty cycle @ 150 % brake resistor, 40 % duty cycle @ 150 %

30	DX-BR050-600	DX-BR050-600	DX-BR050-0K8	DX-BR050-600	DX-BR050-600	DX-BR050-0K8
30	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1	DX-BR050-600	DX-BR050-600	DX-BR050-0K8
30	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1
30	DX-BR050-600	DX-BR050-600	DX-BR050-0K8	DX-BR050-600	DX-BR050-600	DX-BR050-0K8
30	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1	DX-BR050-600	DX-BR050-600	DX-BR050-0K8
30	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1
30	DX-BR050-600	DX-BR050-0K8	DX-BR040-3K1	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1
30	DX-BR050-0K8	DX-BR035-1K1	DX-BR040-3K1	DX-BR050-600	DX-BR050-0K8	DX-BR040-3K1
20	DX-BR022-1K4	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-1K4	DX-BR022-1K4	DX-BR022-3K1
20	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-5K1	DX-BR022-1K4	DX-BR022-1K4	DX-BR022-3K1
20	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-5K1	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-5K1
10	DX-BR012-3K1	DX-BR012-5K1	DX-BR012-9K2	DX-BR012-3K1	DX-BR012-3K1	DX-BR012-5K1
10	DX-BR012-3K1	DX-BR012-5K1	DX-BR012-9K2	DX-BR012-3K1	DX-BR012-5K1	DX-BR012-9K2
3.3	DX-BR006-5K1	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-5K1	DX-BR006-5K1	DX-BR006-9K2
3.3	DX-BR006-5K1	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-5K1	DX-BR006-9K2	DX-BR006-18K1
3.3	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-18K1	DX-BR006-5K1	DX-BR006-9K2	DX-BR006-18K1
1.4	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-18K1
1.4	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
1.4	DX-BR006-18K1	DX-BR006-18K1	DX-BR006-33K3	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
1.4	DX-BR006-18K1	DX-BR006-33K3	DX-BR002-54K3	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
1.4	DX-BR006-18K1	DX-BR006-33K3	DX-BR002-54K3	DX-BR006-18K1	DX-BR006-33K3	DX-BR002-54K3
63	DX-BR100-240	DX-BR100-600	DX-BR100-1K1	DX-BR100-240	DX-BR100-600	DX-BR100-1K1
63	DX-BR100-600	DX-BR100-1K1	DX-BR075-1K1	DX-BR100-240	DX-BR100-600	DX-BR100-1K1
63	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K6	DX-BR100-600	DX-BR100-1K1	DX-BR075-1K1
63	DX-BR100-1K1	DX-BR075-1K1	P: 2x DX-BR150-1K1	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K6
63	DX-BR100-240	DX-BR100-600	DX-BR100-1K1	DX-BR100-240	DX-BR100-600	DX-BR100-1K1
63	DX-BR100-600	DX-BR100-1K1	DX-BR075-1K1	DX-BR100-240	DX-BR100-600	DX-BR100-1K1
63	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K6	DX-BR100-600	DX-BR100-1K1	DX-BR075-1K1
63	DX-BR100-1K1	DX-BR075-1K1	P: 2x DX-BR150-1K1	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K6
63	DX-BR100-1K1	DX-BR100-1K6	DX-BR075-5K1	DX-BR100-1K1	DX-BR075-1K1	P: 2x DX-BR150-1K1
63	DX-BR075-1K1	P: 2x DX-BR150-1K1	DX-BR075-5K1	DX-BR100-1K1	DX-BR100-1K6	DX-BR075-5K1
42	DX-BR047-3K1	DX-BR047-3K1	DX-BR050-5K1	DX-BR075-1K1	DX-BR047-3K1	DX-BR050-5K1
42	DX-BR047-3K1	DX-BR050-5K1	P: 2x DX-BR100-6K2	DX-BR047-3K1	DX-BR047-3K1	DX-BR050-5K1
42	DX-BR047-3K1	DX-BR050-5K1	P: 2x DX-BR100-6K2	DX-BR047-3K1	DX-BR050-5K1	P: 2x DX-BR100-6K2
14	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2	DX-BR022-3K1	DX-BR022-5K1	DX-BR022-9K2
14	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2
14	DX-BR022-9K2	P: 2 x DX-BR050-5K1	P: 2 x DX-BR047-9K2	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2
6.5	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR022-9K2	DX-BR012-9K2	P: 2 x DX-BR022-5K1	DX-BR012-18K1
6.5	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR022-9K2	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR022-9K2
6.5	P: 2 x DX-BR022-5K1	P: 2 x DX-BR022-9K2	R: 2 x DX-BR006-33K3	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR022-9K2
3.3	DX-BR006-18K1	DX-BR006-33K3	R: 2 x DX-BR002-54K3	DX-BR006-18K1	DX-BR006-33K3	DX-BR006-33K3
3.3	DX-BR006-18K1	DX-BR006-33K3	R: 2 x DX-BR002-54K3	DX-BR006-18K1	DX-BR006-33K3	R: 2 x DX-BR002-54K3
3.3	DX-BR006-33K3	R: 2 x DX-BR002-54K3	R: 2 x DX-BR002-102K4	DX-BR006-18K1	DX-BR006-33K3	R: 2 x DX-BR002-54K3
3.3	DX-BR006-33K3	R: 2 x DX-BR002-54K3	R: 2 x DX-BR002-102K4	DX-BR006-33K3	R: 2 x DX-BR002-54K3	R: 2 x DX-BR002-102K4
3.3	DX-BR006-33K3	R: 2 x DX-BR002-54K3	R: 2 x DX-BR002-102K4	DX-BR006-33K3	R: 2 x DX-BR002-54K3	R: 2 x DX-BR002-102K4
1.4	DX-BR002-54K3	DX-BR002-102K4	on request	DX-BR006-33K3	DX-BR002-54K3	DX-BR002-102K4
1.4	DX-BR002-54K3	DX-BR002-102K4	on request	DX-BR002-54K3	DX-BR002-102K4	DX-BR002-102K4
1.4	DX-BR002-54K3	DX-BR002-102K4	on request	DX-BR002-54K3	DX-BR002-102K4	on request
1.4	DX-BR002-102K4	on request	on request	DX-BR002-54K3	DX-BR002-102K4	on request
2 x 1.4	2 x DX-BR006-33K3	2 x DX-BR002-102K4	on request	2 x DX-BR006-33K3	2 x DX-BR002-54K3	2 x DX-BR002-102K4
2 x 1.4	2 x DX-BR002-54K3	2 x DX-BR002-102K4	on request	2 x DX-BR006-33K3	2 x DX-BR002-102K4	on request
2 x 1.4	2 x DX-BR002-54K3	2 x DX-BR002-102K4	on request	2 x DX-BR002-54K3	2 x DX-BR002-102K4	on request
2 x 1.4	2 x DX-BR002-54K3	2 x DX-BR002-102K4	on request	2 x DX-BR002-54K3	2 x DX-BR002-102K4	on request
2 x 1.4	2 x DX-BR002-54K3	2 x DX-BR002-102K4	on request	2 x DX-BR002-54K3	2 x DX-BR002-102K4	on request
2 x 1.4	2 x DX-BR002-102K4	on request	on request	2 x DX-BR002-54K3	2 x DX-BR002-102K4	on request

DG1

Assigned switching and protective elements for DG1

External EMC filter (low leakage current) @ 150 %	Mains choke @ 110 %	U _k	Mains choke @ 150 %	U _k	passive harmonic filter @ 110 %	passive harmonic filter @ 150 %
---	---------------------	----------------	---------------------	----------------	---------------------------------	---------------------------------

DX-EMC34-008-L	DX-LN3-010	4 %	DX-LN3-010	4 %	DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L	DX-LN3-010	4 %	DX-LN3-010	4 %	DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L	DX-LN3-010	4 %	DX-LN3-010	4 %	DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-019	DX-PHF34-010
DX-EMC34-016-L					DX-PHF34-019	DX-PHF34-019
DX-EMC34-016-L					DX-PHF34-019	DX-PHF34-019
DX-EMC34-030-L					DX-PHF34-026	DX-PHF34-019
DX-EMC34-030-L					DX-PHF34-035	DX-PHF34-026
DX-EMC34-030-L					DX-PHF34-073	DX-PHF34-035
DX-EMC34-055-L					DX-PHF34-073	DX-PHF34-073
DX-EMC34-075-L					DX-PHF34-073	DX-PHF34-073
DX-EMC34-075-L					DX-PHF34-102	DX-PHF34-073
DX-EMC34-100-L					DX-PHF34-102	DX-PHF34-102
DX-EMC34-130-L					DX-PHF34-144	DX-PHF34-144
DX-EMC34-180-L					DX-PHF34-180	DX-PHF34-144
DX-EMC34-180-L					DX-PHF34-217	DX-PHF34-180
DX-EMC34-250-L					DX-PHF34-289	DX-PHF34-217
DX-EMC34-250-L					DX-PHF34-325	DX-PHF34-289

DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-008-L					DX-PHF34-010	DX-PHF34-010
DX-EMC34-016-L					DX-PHF34-019	DX-PHF34-010
DX-EMC34-016-L					DX-PHF34-019	DX-PHF34-019
DX-EMC34-016-L					DX-PHF34-026	DX-PHF34-019
DX-EMC34-030-L					DX-PHF34-035	DX-PHF34-026
DX-EMC34-030-L					DX-PHF34-044	DX-PHF34-035
DX-EMC34-030-L					DX-PHF34-044	DX-PHF34-044
DX-EMC34-055-L					DX-PHF34-073	DX-PHF34-044
DX-EMC34-075-L					DX-PHF34-073	DX-PHF34-073
DX-EMC34-075-L					DX-PHF34-102	DX-PHF34-073
DX-EMC34-100-L					DX-PHF34-102	DX-PHF34-102
DX-EMC34-100-L					DX-PHF34-144	DX-PHF34-102
DX-EMC34-180-L					DX-PHF34-180	DX-PHF34-144
DX-EMC34-180-L					DX-PHF34-217	DX-PHF34-180
DX-EMC34-250-L					DX-PHF34-289	DX-PHF34-217
DX-EMC34-250-L					DX-PHF34-325	DX-PHF34-289
DX-EMC34-400-L					DX-PHF34-433	DX-PHF34-325
DX-EMC34-400-L						DX-PHF34-433
DX-EMC34-750-L						
DX-EMC34-750-L						
DX-EMC34-750-L						
DX-EMC34-750-L						
DX-EMC34-750-L						

DG1

2.6

DG1 variable frequency drives up to 630 kW

Assigned switching and protective elements for DG1

Model code	Motor choke @ 110 %	Motor choke @ 150 %	Sine filter @ 110 %	Sine filter @ 150 %	All-pole sine filter @ 110 %	All-pole sine filter @ 150 %
230 V AC, three-phase/230 V AC, three-phase						
DG1-323D7EB-C20C	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-004	DX-SIN3-006-A	DX-SIN3-004-A
DG1-324D8EB-C20C	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-006-A
DG1-326D6EB-C20C	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DG1-323D7...	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-004	DX-SIN3-006-A	DX-SIN3-004-A
DG1-324D8...	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-006-A
DG1-326D6...	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DG1-327D8...	DX-LM3-011	DX-LM3-008	DX-SIN3-016	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DG1-32011...	DX-LM3-016	DX-LM3-011	DX-SIN3-016	DX-SIN3-016	DX-SIN3-013-A	DX-SIN3-013-A
DG1-32012...	DX-LM3-035	DX-LM3-016	DX-SIN3-023	DX-SIN3-016	DX-SIN3-024-A	DX-SIN3-013-A
DG1-32017...	DX-LM3-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-023	DX-SIN3-046-A	DX-SIN3-024-A
DG1-32025...	DX-LM3-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-032	DX-SIN3-046-A	DX-SIN3-046-A
DG1-32031...	DX-LM3-050	DX-LM3-035	DX-SIN3-048	DX-SIN3-032	DX-SIN3-065-A	DX-SIN3-046-A
DG1-32048...	DX-LM3-063	DX-LM3-050	DX-SIN3-061	DX-SIN3-048	DX-SIN3-065-A	DX-SIN3-065-A
DG1-32061...	DX-LM3-080	DX-LM3-063	DX-SIN3-090	DX-SIN3-061	DX-SIN3-110-A	DX-SIN3-065-A
DG1-32075...	DX-LM3-100	DX-LM3-080	DX-SIN3-090	DX-SIN3-090	DX-SIN3-110-A	DX-SIN3-110-A
DG1-32088...	DX-LM3-150	DX-LM3-100	DX-SIN3-115	DX-SIN3-090	P: 2 x DX-SIN3-065-A	DX-SIN3-110-A
DG1-32114...	DX-LM3-150	DX-LM3-150	DX-SIN3-150	DX-SIN3-115	P: 2 x DX-SIN3-110-A	P: 2 x DX-SIN3-065-A
DG1-32143...	DX-LM3-180	DX-LM3-150	DX-SIN3-180	DX-SIN3-150	P: 2 x DX-SIN3-110-A	P: 2 x DX-SIN3-110-A
DG1-32170...	DX-LM3-220	DX-LM3-180	DX-SIN3-250	DX-SIN3-180		P: 2 x DX-SIN3-110-A
DG1-32170...	DX-LM3-303	DX-LM3-220	DX-SIN3-480	DX-SIN3-250		
DG1-32248...	DX-LM3-370	DX-LM3-260	DX-SIN3-480	DX-SIN3-250		
400 V AC, three-phase/400 V AC, three-phase						
DG1-342D2EB-C20C	DX-LM3-008	DX-LM3-008	DX-SIN3-004	DX-SIN3-004	DX-SIN3-004-A	DX-SIN3-2D5-A
DG1-343D3EB-C20C	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-004	DX-SIN3-006-A	DX-SIN3-004-A
DG1-344D3EB-C20C	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-006-A	DX-SIN3-006-A
DG1-345D6EB-C20C	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-006-A
DG1-342D2...	DX-LM3-008	DX-LM3-008	DX-SIN3-004	DX-SIN3-004	DX-SIN3-004-A	DX-SIN3-2D5-A
DG1-343D3...	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-004	DX-SIN3-006-A	DX-SIN3-004-A
DG1-344D3...	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-006-A	DX-SIN3-006-A
DG1-345D6...	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-006-A
DG1-347D6...	DX-LM3-011	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DG1-349D0...	DX-LM3-016	DX-LM3-011	DX-SIN3-016	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DG1-34012...	DX-LM3-016	DX-LM3-016	DX-SIN3-016	DX-SIN3-016	DX-SIN3-024-A	DX-SIN3-013-A
DG1-34016...	DX-LM3-035	DX-LM3-016	DX-SIN3-023	DX-SIN3-016	DX-SIN3-024-A	DX-SIN3-024-A
DG1-34023...	DX-LM3-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-023	DX-SIN3-046-A	DX-SIN3-024-A
DG1-34031...	DX-LM3-050	DX-LM3-035	DX-SIN3-048	DX-SIN3-032	DX-SIN3-046-A	DX-SIN3-046-A
DG1-34038...	DX-LM3-050	DX-LM3-050	DX-SIN3-048	DX-SIN3-048	DX-SIN3-046-A	DX-SIN3-046-A
DG1-34046...	DX-LM3-063	DX-LM3-050	DX-SIN3-061	DX-SIN3-048	DX-SIN3-065-A	DX-SIN3-046-A
DG1-34061...	DX-LM3-080	DX-LM3-063	DX-SIN3-072	DX-SIN3-061	DX-SIN3-110-A	DX-SIN3-065-A
DG1-34072...	DX-LM3-100	DX-LM3-080	DX-SIN3-090	DX-SIN3-072	DX-SIN3-110-A	DX-SIN3-110-A
DG1-34087...	DX-LM3-150	DX-LM3-100	DX-SIN3-115	DX-SIN3-090	DX-SIN3-110-A	DX-SIN3-110-A
DG1-34105...	DX-LM3-150	DX-LM3-150	DX-SIN3-150	DX-SIN3-115	P: 2 x DX-SIN3-110-A	DX-SIN3-110-A
DG1-34140...	DX-LM3-180	DX-LM3-150	DX-SIN3-180	DX-SIN3-150	P: 2 x DX-SIN3-110-A	P: 2 x DX-SIN3-110-A
DG1-34170...	DX-LM3-220	DX-LM3-180	DX-SIN3-250	DX-SIN3-180		P: 2 x DX-SIN3-110-A
DG1-34205...	DX-LM3-303	DX-LM3-220	DX-SIN3-480	DX-SIN3-250		
DG1-34245...	DX-LM3-370	DX-LM3-260	DX-SIN3-480	DX-SIN3-250		
DG1-34310...	DX-LM3-450	DX-LM3-370	DX-SIN3-480	DX-SIN3-480		
DG1-34385...		DX-LM3-450	DX-SIN3-480	DX-SIN3-480		
DG1-34460...				DX-SIN3-480		
DG1-34520...						
DG1-34590...						
DG1-34650...						
DG1-34730...						
DG1-34820...						
DG1-34920...						
DG1-341K0...						

2.6

DG1 variable frequency drives up to 630 kW

Assigned switching and protective elements for DG1

Model code	power rating 110 %	input current 110 %	output current 110 %	power rating 150 %	input current 150 %	output current 150 %	MCCB Type 1 coordination @ 110 %	Fuse Type 1 coordination @ 110 %	MCCB Type 1 coordination @ 150 %	Fuse Type 1 coordination @ 150 %
575 V AC, three-phase/575 V AC, three-phase										
DG1-353D3...	2.2	4.2	4.5	1.5	3.1	3.3	PKZM0-6,3	C14G8	PKZM0-6,3	C14G8
DG1-354D5...	4	7	7.5	2.2	4.2	4.5	PKZM0-10	C14G10	PKZM0-10	C14G10
DG1-357D5...	5.5	9.3	10	4	7	7.5	PKZM0-12	C14G12	PKZM0-12	C14G12
DG1-35010...	7.5	12.5	13.5	5.5	9.3	10	PKZM0-16	C14G16	PKZM0-16	C14G16
DG1-35013...	11	16.7	18	7.5	12.5	13.5	PKZM0-20	C14G20	PKZM0-20	C14G20
DG1-35018...	15	20.4	22	11	16.7	18	PKZM0-25	C14G25	PKZM0-32	C22G32
DG1-35022...	18.5	25.2	27	15	20.4	22	PKZM0-32	C22G32	PKZM0-32	C22G32
DG1-35027...	22	31.7	34	18.5	25.1	27	PKZM4-40	C22G40	PKZM4-40	C22G40
DG1-35034...	30	38.2	41	22	31.6	34	PKZM4-50	C22G50	PKZM4-50	C22G50
DG1-35041...	37	48.1	52	30	38.1	41	PKZM4-63	C22G63	PKZM4-63	C22G63
DG1-35052...	45	57.4	62	37	48.3	52	NZMC1-A80	80NHG1B-690	NZMC1-A80	80NHG1B-690
DG1-35062...	55	73	80	45	57.6	62	NZMC1-A100	100NHG1B-690	NZMC1-A100	100NHG1B-690
DG1-35080...	75	91.3	100	55	74.4	80	NZMC1-A125	125NHG1B-690	NZMC1-A125	125NHG1B-690
DG1-35100...	90	114.1	125	75	93	100	NZMC1-A160	160NHG1B-690	NZMC1-A160	160NHG1B-690
DG1-35125...	110	132.9	144	90	116.2	125	NZMC1-A160	160NHG1B-690	NZMC2-A200	200NHG1B-690
DG1-35144...	160	202.8	208	110	140.4	144	NZMC2-A250	250NHG1B-690	NZMC2-A250	250NHG1B-690
DG1-35208...	200	243.8	250	160	202.8	208	NZMC2-A300	315NHG3B-690	NZMC3-A400	400NHG3B-690
DG1-35261...	250	272	325	200	223	261	NZMC3-A400	400NHG3B-690	NZMC3-A400	400NHG3B-690
DG1-35325...	315	330	385	250	269	325	NZMC3-A400	400NHG3B-690	NZMC3-A500	500NHG3B-400
DG1-35385...	315	386	416	315	327	385	NZMC3-A500	500NHG3B-400	NZMC3-A500	500NHG3B-400
DG1-35416...	355	415	460	315	382	416	NZMC3-A500	500NHG3B-400	NZMN4-AX630	630NHG4B-690
DG1-35460...	400	477	520	355	433	460	NZMN4-AX630	630NHG3B-400	NZMN4-AX800	800NHG4B-690
DG1-35520...	450	532	590	400	472	520	NZMN4-AX630	630NHG3B-400	NZMN4-AX800	800NHG4B-690
DG1-35590...	500	597	650	450	527	590	NZMN4-AX800	800NHG4B-690	NZMN4-AX800	800NHG4B-690
DG1-35650...	560	653	750	500	591	650	NZMN4-AX800	800NHG4B-690	NZMN4-AX1000	170M6814D
DG1-35820...	630	813	820	500	739	650	NZMN4-AX1000	170M6814D	NZMN4-AX1250	170M8554D

Assigned switching and protective elements for DG1

minimum braking resistance brake resistor, 10 % duty cycle @ 110 % brake resistor, 20 % duty cycle @ 110 % brake resistor, 40 % duty cycle @ 110 % brake resistor, 10 % duty cycle @ 150 % brake resistor, 20 % duty cycle @ 150 % brake resistor, 40 % duty cycle @ 150 %

100	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K6	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K1
100	DX-BR100-1K1	DX-BR100-1K6	DX-BR100-6K2	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K6
100	DX-BR100-1K1	DX-BR100-6K2	DX-BR100-6K2	DX-BR100-1K1	DX-BR100-1K6	DX-BR100-6K2
30	DX-BR040-3K1	DX-BR040-3K1	DX-BR040-5K1	DX-BR035-1K1	DX-BR040-3K1	DX-BR040-5K1
30	DX-BR040-3K1	DX-BR040-5K1	DX-BR047-9K2	DX-BR040-3K1	DX-BR040-3K1	DX-BR040-5K1
30	DX-BR040-3K1	DX-BR040-5K1	DX-BR047-9K2	DX-BR040-3K1	DX-BR040-5K1	DX-BR047-9K2
18	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2	DX-BR022-5K1	DX-BR022-5K1	DX-BR022-9K2
18	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2
18	DX-BR022-9K2	P: 2 x DX-BR050-5K1	P: 2 x DX-BR047-9K2	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2
9	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR047-9K2	DX-BR012-9K2	DX-BR012-18K1	DX-BR012-18K1
9	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR047-9K2	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR047-9K2
9	DX-BR012-18K1	P: 2 x DX-BR022-9K2	R: 2 x DX-BR006-33K3	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR047-9K2
7	DX-BR012-18K1	P: 3 x DX-BR022-9K2	R: 4 x DX-BR002-54K3	DX-BR012-18K1	P: 2 x DX-BR022-9K2	R: 2 x DX-BR006-33K3
7	DX-BR012-18K1	R: 2 x DX-BR006-33K3	R: 4 x DX-BR002-54K3	DX-BR012-18K1	P: 3 x DX-BR047-9K2	R: 4 x DX-BR002-54K3
7	P: 3 x DX-BR022-9K2	R: 4 x DX-BR002-54K3	R: 4 x DX-BR002-102K4	DX-BR012-18K1	R: 2 x DX-BR006-33K3	R: 4 x DX-BR002-54K3
2.5	DX-BR006-33K3	P: 2 x DX-BR006-33K3	R: 2 x DX-BR002-102K4	DX-BR006-33K3	P: 2 x DX-BR006-33K3	P: 2 x DX-BR006-33K3
2.5	P: 2 x DX-BR006-18K1	P: 2 x DX-BR006-33K3	on request	DX-BR006-33K3	P: 2 x DX-BR006-33K3	R: 2 x DX-BR002-102K4
2.5	P: 2 x DX-BR006-33K3	R: 2 x DX-BR002-102K4	on request	P: 2 x DX-BR006-18K1	P: 2 x DX-BR006-33K3	on request
2.5	P: 2 x DX-BR006-33K3	on request	on request	P: 2 x DX-BR006-33K3	R: 2 x DX-BR002-102K4	on request
2.5	P: 2 x DX-BR006-33K3	on request	on request	P: 2 x DX-BR006-33K3	on request	on request
2 x 2.5	2 x DX-BR006-33K3	on request	on request	2 x DX-BR006-33K3	on request	on request
2 x 2.5	on request	on request	on request	2 x DX-BR006-33K3	on request	on request
2 x 2.5	on request	on request	on request	on request	on request	on request
2 x 2.5	on request	on request	on request	on request	on request	on request
2 x 2.5	on request	on request	on request	on request	on request	on request
2 x 2.5	on request	on request	on request	on request	on request	on request

Notes R: = mount in series
P: = mount in parallel

2.6

DG1 variable frequency drives up to 630 kW

Assigned switching and protective elements for DG1

Model code	RCD type @ 110 %	RCD type @ 150%	optional mains contactor @110%	optional mains contactor @150%	External EMC filter @ 110 %	External EMC filter @ 150 %
575 V AC, three-phase/575 V AC, three-phase						
DG1-353D3...			DILM7-10(24VDC)	DILM7-10(24VDC)		
DG1-354D5...			DILM7-10(24VDC)	DILM7-10(24VDC)		
DG1-357D5...			DILM7-10(24VDC)	DILM7-10(24VDC)		
DG1-35010...			DILM7-10(24VDC)	DILM7-10(24VDC)		
DG1-35013...			DILM7-10(24VDC)	DILM7-10(24VDC)		
DG1-35018...			DILM17-10(RDC24)	DILM17-10(RDC24)		
DG1-35022...			DILM17-10(RDC24)	DILM17-10(RDC24)		
DG1-35027...			DILM17-10(RDC24)	DILM17-10(RDC24)		
DG1-35034...			DILM40(RDC24)	DILM40(RDC24)		
DG1-35041...			DILM40(RDC24)	DILM40(RDC24)		
DG1-35052...			DILM40(RDC24)	DILM50(RDC24)		
DG1-35062...			DILM72(RDC24)	DILM72(RDC24)		
DG1-35080...			DILM80(RDC24)	DILM95(RDC24)		
DG1-35100...			DILM95(RDC24)	DILM115(RDC24)		
DG1-35125...			DILM115(RDC24)	DILM150(RDC24)		
DG1-35144...			DILM170(RDC24)	DILM170(RDC24)		
DG1-35208...			DILM185A/22(RAC240)	DILM225A/22(RAC240)		
DG1-35261...			DILM225A/22(RAC240)	DILM250/22(RA250)		
DG1-35325...			DILM300A/22(RA250)	DILM400/22(RA250)		
DG1-35385...			DILM400/22(RA250)	DILM400/22(RA250)		
DG1-35416...			DILM400/22(RA250)	DILM500/22(RA250)		
DG1-35460...			DILM500/22(RA250)	DILM500/22(RA250)		
DG1-35520...			DILM500/22(RA250)	DILM580/22(RA250)		
DG1-35590...			DILM580/22(RA250)	DILM580/22(RA250)		
DG1-35650...			DILM580/22(RA250)	DILM750/22(RA250)		
DG1-35820...			DILM750/22(RA250)	DILH1200/22(RAW250)		

2.6

DG1 variable frequency drives up to 630 kW


Assigned switching and protective elements for DG1

Model code	Motor choke @ 110 %	Motor choke @ 150 %	Sine filter @ 110 %	Sine filter @ 150 %	All-pole sine filter @ 110 %	All-pole sine filter @ 150 %
575 V AC, three-phase/575 V AC, three-phase						
DG1-353D3...	DX-LM3-008	DX-LM3-008				
DG1-354D5...	DX-LM3-008	DX-LM3-008				
DG1-357D5...	DX-LM3-011	DX-LM3-008				
DG1-35010...	DX-LM3-016	DX-LM3-011				
DG1-35013...	DX-LM3-035	DX-LM3-016				
DG1-35018...	DX-LM3-035	DX-LM3-035				
DG1-35022...	DX-LM3-035	DX-LM3-035				
DG1-35027...	DX-LM3-035	DX-LM3-035				
DG1-35034...	DX-LM3-050	DX-LM3-035				
DG1-35041...	DX-LM3-063	DX-LM3-050				
DG1-35052...	DX-LM3-063	DX-LM3-063				
DG1-35062...	DX-LM3-080	DX-LM3-063				
DG1-35080...	DX-LM3-100	DX-LM3-080				
DG1-35100...	DX-LM3-180	DX-LM3-100				
DG1-35125...	DX-LM3-180	DX-LM3-150				
DG1-35144...	DX-LM3-220	DX-LM3-150				
DG1-35208...	DX-LM3-260	DX-LM3-220				
DG1-35261...	DX-LM3-370	DX-LM3-303				
DG1-35325...	DX-LM3-450	DX-LM3-370				
DG1-35385...	DX-LM3-450	DX-LM3-450				
DG1-35416...		DX-LM3-450				
DG1-35460...						
DG1-35520...						
DG1-35590...						
DG1-35650...						
DG1-35820...						


Connection examples

Connection example for DG1 with the following functions:

- ① Setpoint input via external analog setpoint AI2
- ② Process value feedback via AI1 and PID control

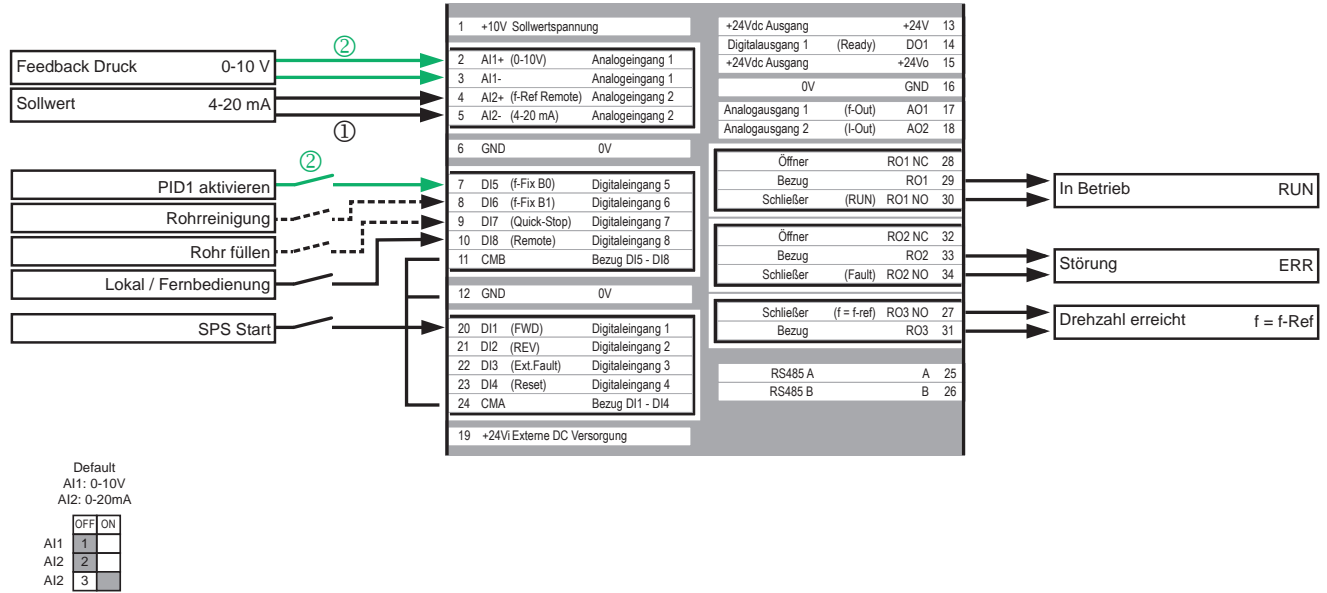

Connection example for master-follower operation. The droop function is used ④
The same setpoint input / PID use specifications as for the previous example apply here as well.

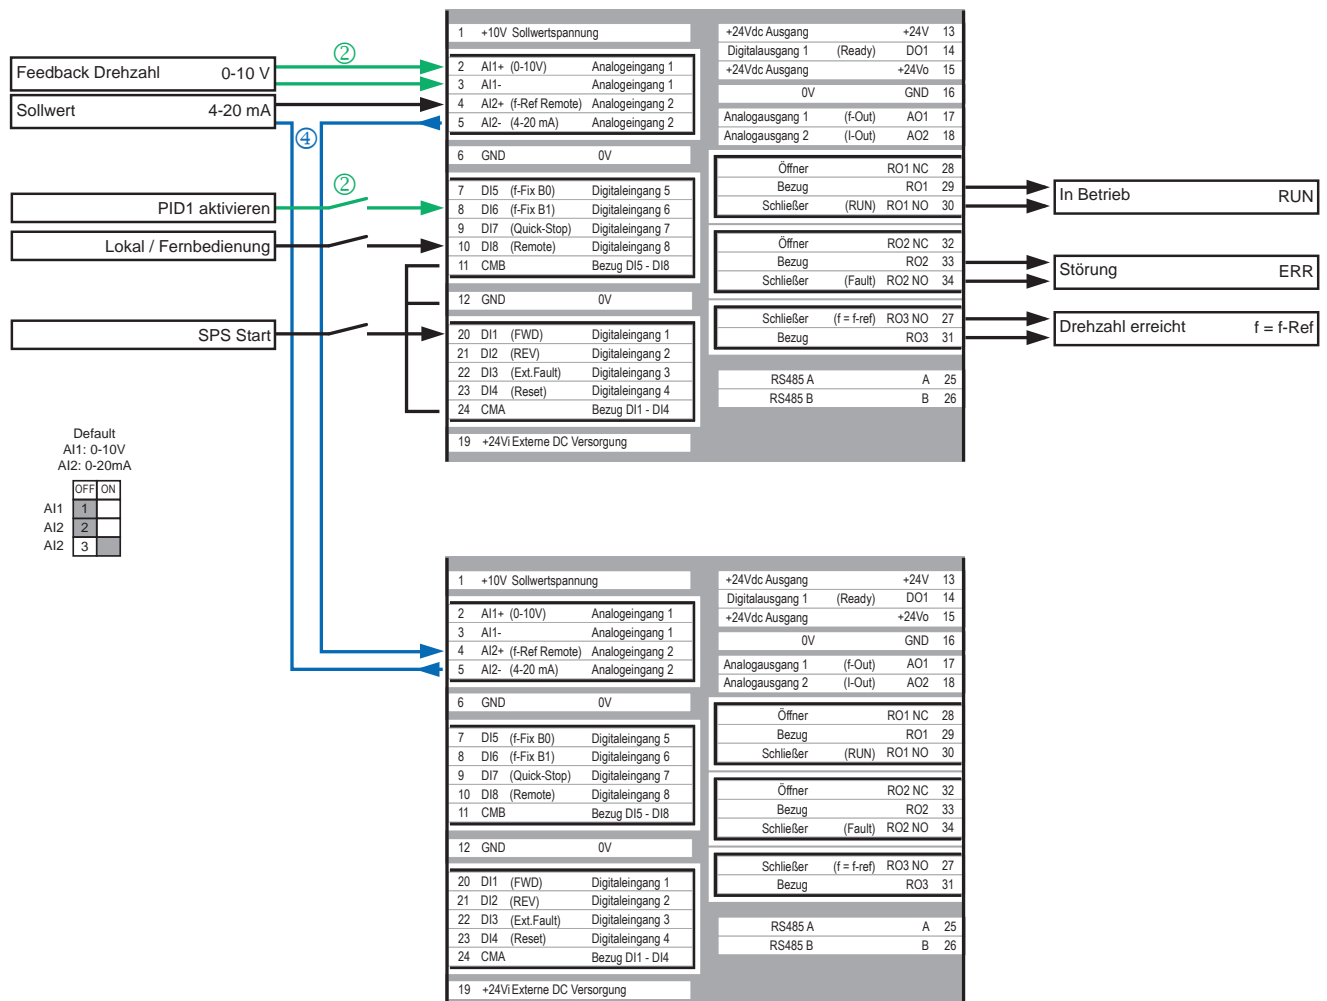

DG1

2.6

DG1 variable frequency drives up to 630 kW

Technical specifications

Technical specifications

	Unit	Value
General		
Product standard		IEC/EN 61800-2
Production standard		RoHS, ISO 9001
Security		IEC/EN 61800-5, IEC/EN 60950-1: SELF
Radio interference level		IEC/EN 61800-3
Integrated radio interference suppression filter		Yes, C2
Radio interference class (EMC)		C1 (with external filter, for conducted emissions only), C2, C3, depending on the motor cable length, the connected load, and ambient conditions. External radio interference suppression filters (optional) may be necessary.
Radio interference class (EMC), external filters		Optional external radio interference suppression filter for longer motor cable lengths and for use in different EMC environments
Environment (EMC)		1st and 2nd environments as per EN 61800-3
First environment		Yes
Second environment		Yes
Longest permissible length of motor cable with internal filter		C2 ≤ 10 m C3 ≤ 50 m DG1-35...: C3 ≤ 10 m
Interference immunity		EN 61800-3:2004+A1-2012, first and second environment
Emissions		EN 61800-3:2004+A1-2012, Category C2
Electrostatic discharge (ESD)		IEC 61000-4-2, 4 kV contact, 8 kV air, Second environment, Criterion B
Fast transients (burst)		IEC 61000-4-4, 2 kV/5 kHz, Second environment, Criterion B
Dielectrical strength		Input to output: 3600 V AC/5100 V DC Input to earth: 2000 V AC/2828 V DC
THD		
		((depends on size))
Acoustic		
Average noise level (cooling fan) sound power level in dB(A)		FR0: 51.7 dB FR1: 51.2 dB FR2: 58.6 dB FR3: 61.0 dB FR4: 68.0 dB FR5: 69.1 dB FR6: 73.2 dB
Noise level		EN 61800-5-1 (2007)
Climatic proofing		< 95%, average relative humidity (RH), non-condensing, non-corrosive
Ambient temperature		
110% overload (1 min./10 min.)	°C	-30 - +40 (max. +55 with 1% derating per Kelvin temperature rise)
150% overload (1 min./10 min.)	°C	-30 - +50 (max. +60 with 1% derating per Kelvin temperature rise)
T _{min}	°C	-30
T _{max}	°C	60
Ambient conditions		
		IEC 60068-2-60 Test Parameter: Flowing mixed gas corrosion test, Method 1 (H2S [hydrogen sulfide] and SO2 [sulfur dioxide])
Ambient air according to IEC/EN 60721-3-3 ((class beyond EN60721-3-3 is missing))		3C2, 3S2
Storage temperature	°C	-40 up to +70
Altitude		by voltage
Permissible network configurations		TN-S, TN-C, TN-C-S, TT, IT
Mounting position		vertical
Protection type		
DG1-...-C21C		IP21 / NEMA Type 1
DG1-...-C54C		IP54 / NEMA Type 12 (keypad required)
Protection against contact		BGV A3 (VBG4, finger- and back-of-hand proof)
Overvoltage category		III
Pollution degree		2
Mechanical shock resistance		EN 61800-5-1, EN 60068-2-27 UPS drop test (for weights inside the UPS frame) Storage and transportation: maximum 15 g, 11 ms (inside the packaging)

	Unit	Value
Main circuit		
Rated operating voltage (three-phase)		
DG1-32...	V	208 (-10%) - 240 (+10%)
DG1-34...	V	380 (-10%) - 500 (+10%)
DG1-35...	V	500 (-10%) - 600 (+10%)
Tolerance up	%	10
Tolerance down	%	15
Mains frequency	Hz	50/60
Tolerance	%	10
Mains frequency range	Hz	45 - 66
Mains switch-on frequency		Maximum of one time every 60 seconds
Overload withstand capability		
Overload cycle for 60 s every 600 s		
I_L (1 min./10 min.)	%	110
I_H (1 min./10 min.)	%	150
Comment		Rated operational current for a standard switching frequency and an ambient temperature of +50 °C for a 150% overload and +40 °C for a 110% overload
Short-time overload withstand capability (2 sec / 20 sec)		
Peak-overload cycle		for 2 seconds every 20 seconds
Output voltage at U_e	V	0 - U_{in}
Integrated DC link choke	u_k %	5
Rated surge voltage invariability	U_{imp} μ s	1.2/50
Rated insulation voltage U_i	V	
Actuating circuit		
External control voltage	U_c V	24 V DC (max. 250 mA options incl.)
Permissible residual ripple		
Reference voltage		
Analog input 1 (voltage)	V DC	0 - 10, 2 - 10, variable - 10
Analog input 2 (voltage)	V DC	0 - 10, 2 - 10, variable - 10, -10 - +10, variable negative to variable positive
Analog input 1 and 2 (current)	mA	0 - 20, 4 - 20, variable - 20
Internal reference voltage		10 V DC (max. 10 mA)
Setpoint input (resolution)		
Analog input	%	0.1% (10-bit), accuracy +1%
Keypad input	Hz	0.01
Frequency resolution	Hz	0.01
Variable frequency drive functions		
Ramp times		
Startup	s	0.1 - 3000
Delay	s	0.1 - 3000
Control types		U/f control Speed control with slip compensation sensorless vector control (SLV) torque regulation
Inputs / outputs		
Digital inputs		8, parameterizable, max. 30 V DC
Digital outputs		1, parameterizable, 24 V DC
Analog inputs		2, parameterizable, 0 - 10 V DC, 2 - 10 V DC, -10 - +10 V DC, 0/4 - 20 mA
Analog outputs		2, parameterizable, 0 - 10 V, 0/4 - 20 mA
Relay		3, parameterizable, 2 changeover contacts and 1 N/O, 6 A (240 V AC) / 6 A (24 V DC)
Communication		
On-board		Modbus RTU, Modbus TCP, BACnet MS/TP, Ethernet/IP
Optional		PROFIBUS, CANopen, SmartWire-DT, PROFINET
SmartWire-DT connection		DXG-NET-SWD
Fault current protection		RCD Type B (AC/DC sensitive)
Safety functions		STO (Safe Torque Off, SIL1, PLc Cat 1)
Real time clock		Yes
Plug-in terminal strips		Yes
Keypad (...-C...)		Multi-line LCD keypad, removable, can be installed in remote location
Display		Yes
Keypad		Yes
Variable frequency drive configuration		Variable frequency drive with internal DC link, DC link choke and IGBT inverter
Variable frequency drive type		U converter
Application field		For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz


2.6

DG1 variable frequency drives up to 630 kW

Dimensions and weights


Dimensions and weights

Sizes FS0 to FS5

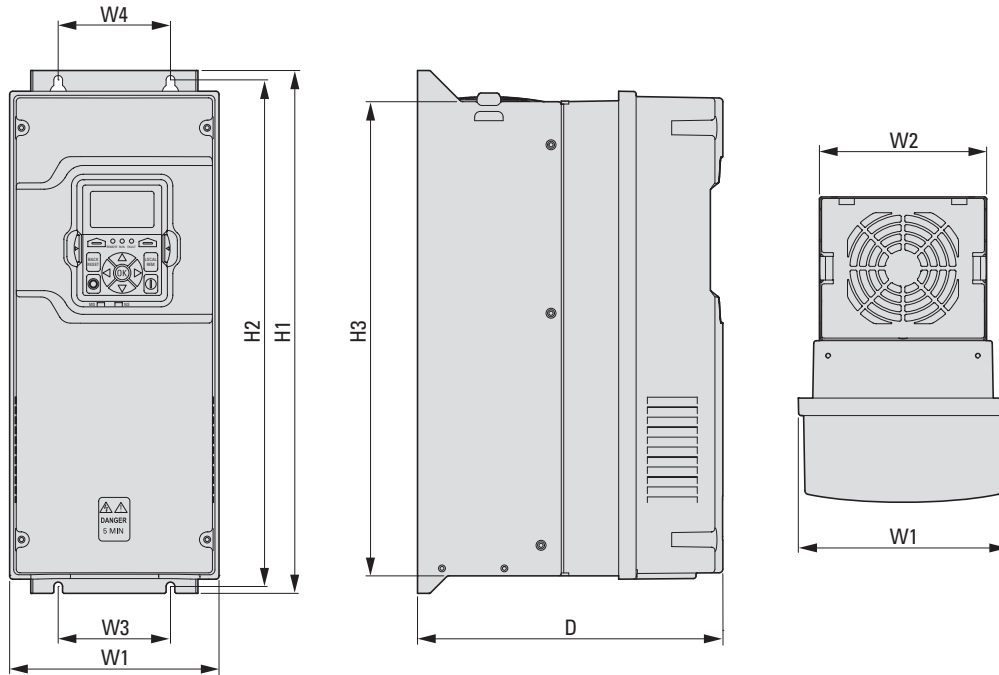


Frame size	D	H1 Chaser light on times	H2 Chaser light on times	H3 Chaser light on times	W1	W2	W3	W4	Ø	Weight
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
FR0	173.5	268.7	258.0	242.3	127.0	126.3	108.3	108.3	7.0	2.0
FR1	200.9	327.0	312.0	292.0	153.0	122.0	100.0	100.0	7.0	6.5
FR2	244.7	419.0	406.0	380.0	167.8	134.0	90.0	90.0	7.0	10.6
FR3	265.1	558.0	545.0	518.5	204.6	184.0	125.0	125.0	9.0	22.6
FR4	294.0	630.0	617.5	590.7	237.7	232.0	205.0	205.0	9.0	35.2
FR5	340.7	888.5	753.0	707.0	288.0	282.0	220.0	220.0	9.0	70.0
FR6	371.1	1035.1	845.1	797.1	485.9	480.1	400.1	400.1	9.0	112.0

Frame size FS7, FS8 brake chopper option

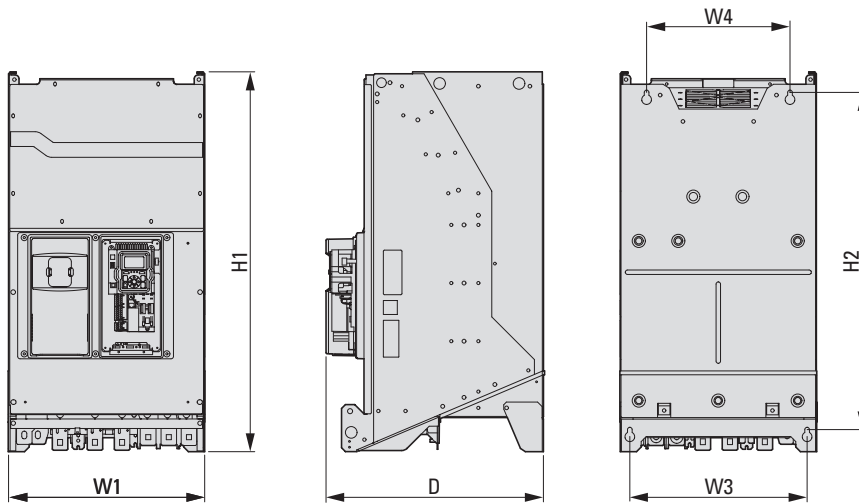

Frame size FS7, FS8 non-brake chopper option

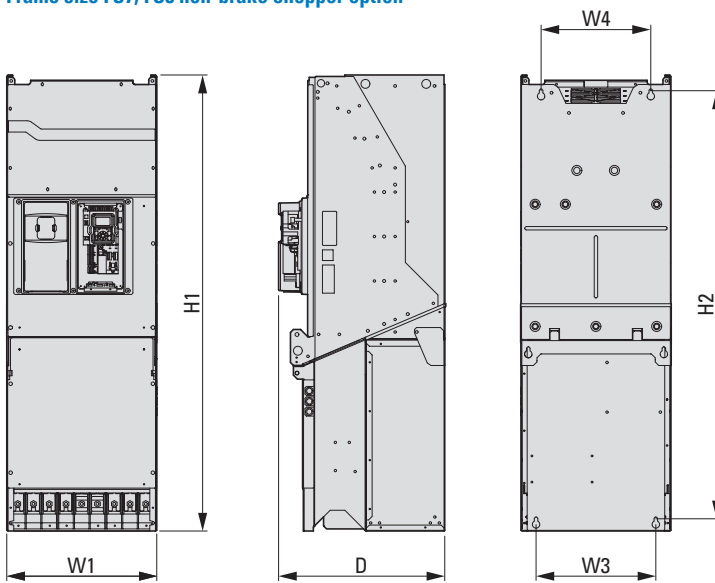

Frame size	D	H1	H2	H3	W1	W2	W3	W4	Ø	Weight kg
FR7	561	980	870	–	506	–	404	370	25	205
FR8	561	980	870	–	506	–	404	370	25	205
FR7/8 with brake chopper	561	1538	1442	–	506	–	404	370	25	410

Note FR8 is 2 FR7 coupled together.



DX1 variable frequency drives High Performance Drive

Operation on a new level

The PowerXL DX1 variable frequency drive combines high functionality and ease of use with a full-color touchscreen control unit, combined with market-leading safety features

Premium safety

With the built-in two-channel STO (SIL3, PLe, Cat.4), an external safety relay is no longer required to safely switch the drive torque-free. If more safety functions are required, the optional functional-safety extension provides a total of 11 safety features.

Range

- 0.75- 90 kW (230 V)
- 0.75 - 160 kW (400 V)
- 5 - 200 HP (575 V)

Certified cybersecurity

The DX1 is IEC/EN 62442-4-2 Level 1 certified. This means that a comparable security standard has been achieved, which places the highest demands on the device in order to protect against unwanted access.

User access management

User access management is another level of security for the user. Depending on the access level, only monitor parameters can be viewed, the most necessary parameters for operation can be changed or full control of the device can be obtained. This allows the configuration and programming to be reliably protected from unauthorized access

Smartphone experience

The DX1 is the first frequency drive in the world with a touchscreen interface. This enables completely new operating methods that are already known from the mobile phones:

- Only relevant buttons are displayed
- Dynamic interface depending on menu item
- Help texts from the manual in the local language
- Text and graphics at the same time

The operation is intuitive and requires no training or manual.

Master follower function

2 or more DX1 can be synchronized via a fiber card. This allows synchronization and ratio controls to be established with high precision.

and speed control. For complex applications with the highest requirements, the DX1 offers all the necessary functions and innovative features in the drives sector.

Integrated web server (DX1)

The integrated web server enables device parameterization and operation without installing additional software.

Bluetooth integrated

The PowerXpert inControl can communicate with the DX1 via Bluetooth without opening the control cabinet.

Multi-pump functions

For booster pumps in which several pumps run in a single system, the DX1 offers all the basic functions to control the on/off switch-on or the uniform control of all pumps

Robust

IP21 and IP54 protection. Ambient temperature down to -30 °C with cold weather function, up to +50 °C (up to +60° with derating)

Measurement

Energy metering and energy cost calculator integrated

Short-circuit protection without ballasts

For short-circuit protection up to 100kA, no additional ballasts are required, such as a mains choke. The achievable short-circuit current depends only on the protective device used:

- FAZ up to 14 kA
- PKZ up to 65 kA
- Fuses up to 100 kA

Accessories

- PROFINET connection with Fast-Channel
- PROFIBUS connection
- Ethernet/IP connection
- I/O extensions

Applications

- Machine applications
- Speed control
- Synchronization control
- Torque control
- Winder

For more information, visit:
Eaton.com/dx1



2.7 DX1 variable frequency drives up to 160 kW	
System overview	230
Key to type references	231
UL/CSA and sizes	232
Ordering	233
DX1 variable frequency drive, 230 V.	233
DX1 variable frequency drive, 400 V.	235
DX1 variable frequency drive, 575 V	237
Accessories	239
Engineering	244
Assigned switching and protective elements for DX1	244
Technical specifications	246
Dimensions and weights	249




2.7

DX1 variable frequency drives up to 160 kW

System overview

System overview

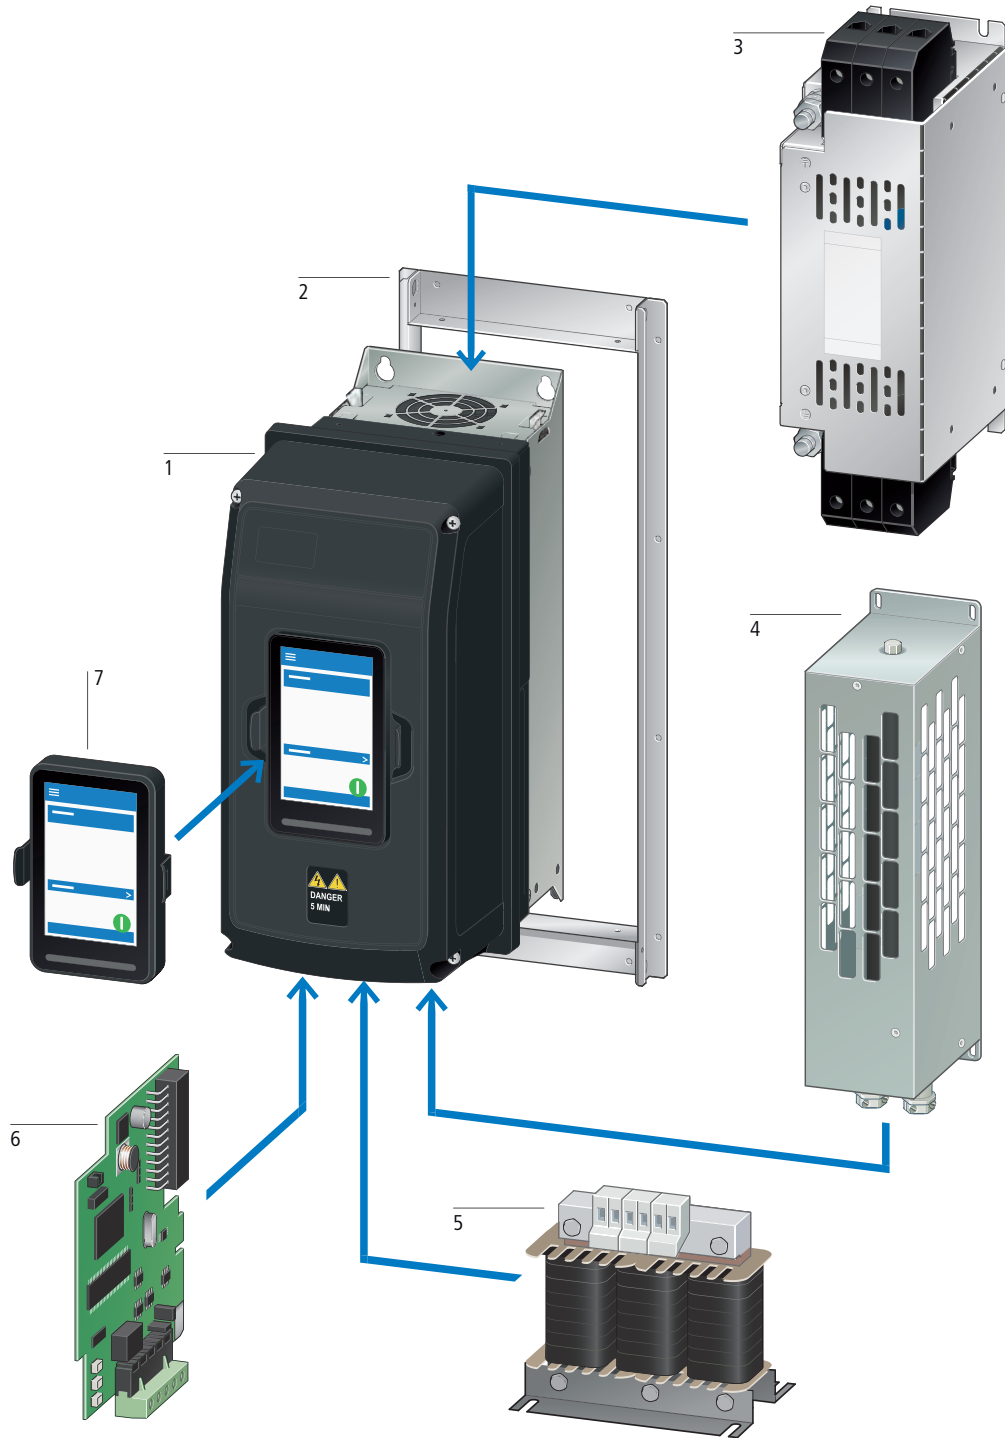


DX1

DX1-...	1
→ Page 233	
Mounting frame DXG-ACC-FR...	2
→ Page 210	
EMV filter DX-EMC...	3
→ Page 256	

Braking resistances DX-BR...	4
→ Page 261	
Mains chokes DX-LN...	5
Motor chokes DX-LM...	
Harmonic filters DX-PHF...	
Sine filters DX-SIN...	
→ Page 254	
→ Page 258	
→ Page 255	
→ Page 259	

Expansions and communication cards DXX-EXT-..., DXX-NET-...	6
→ Page 239	
External keypad DXX-KEY-...	7
→ Page 239	

Key to type references

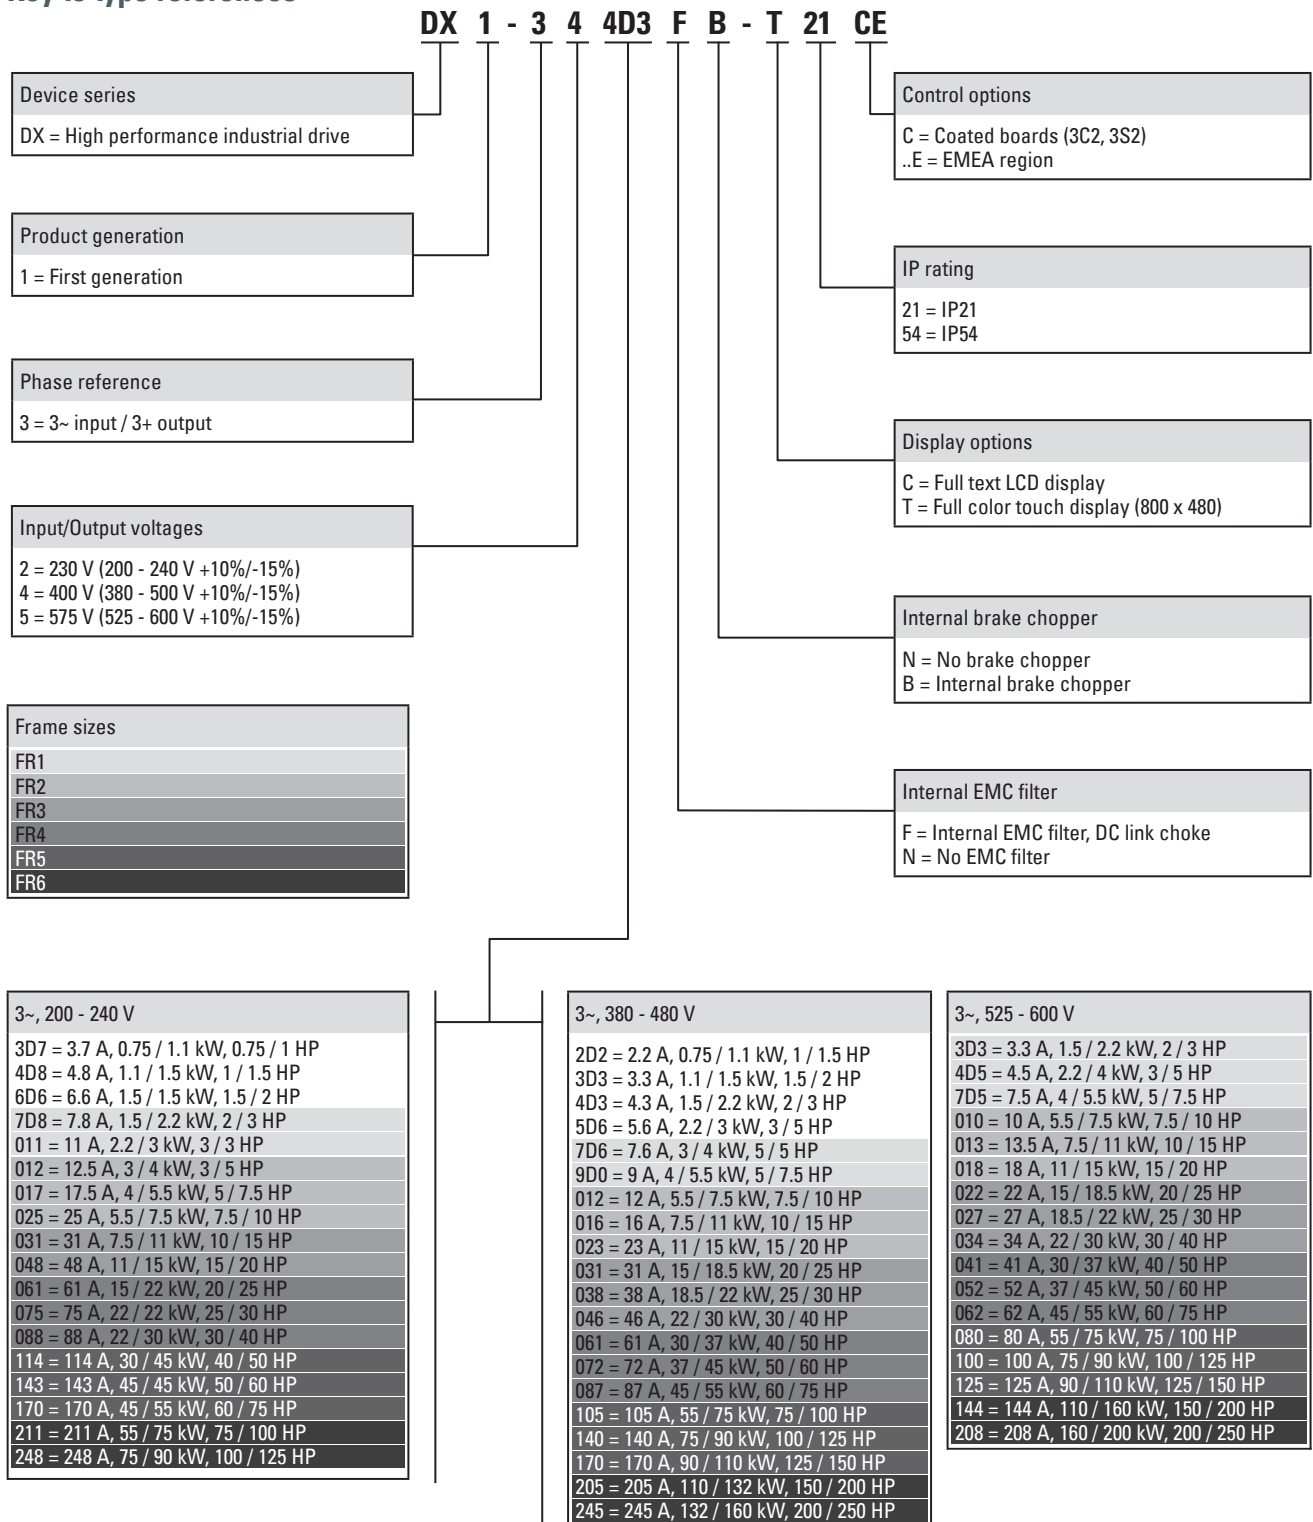

Performance specifications refer to 150% / 110% overload cycle. At 110% overload cycle, the permissible ambient temperature is reduced to +40 °C.



2.7

DX1 variable frequency drives up to 160 kW


UL/CSA and sizes

UL / CSA

Information relevant or export to North America

Product standards	UL508C, CSA-C22.2 No. 274-13; IEC/EN 61800-3; IEC/EN 61800-5; CE marking
UL file no.	E134360
UL category control no.	NMMS, NMMS7
CSA file no.	UL report applies to both US and Canada
North America certification	UL listed, certified by UL for use in Canada
Suitable for	Branch circuits
Max. voltage rating	3-240 V AC, 3-500 V AC, 3-600 V AC IEC earthing systems: TN-S UL/CSA: solidly grounded wye

Sizes

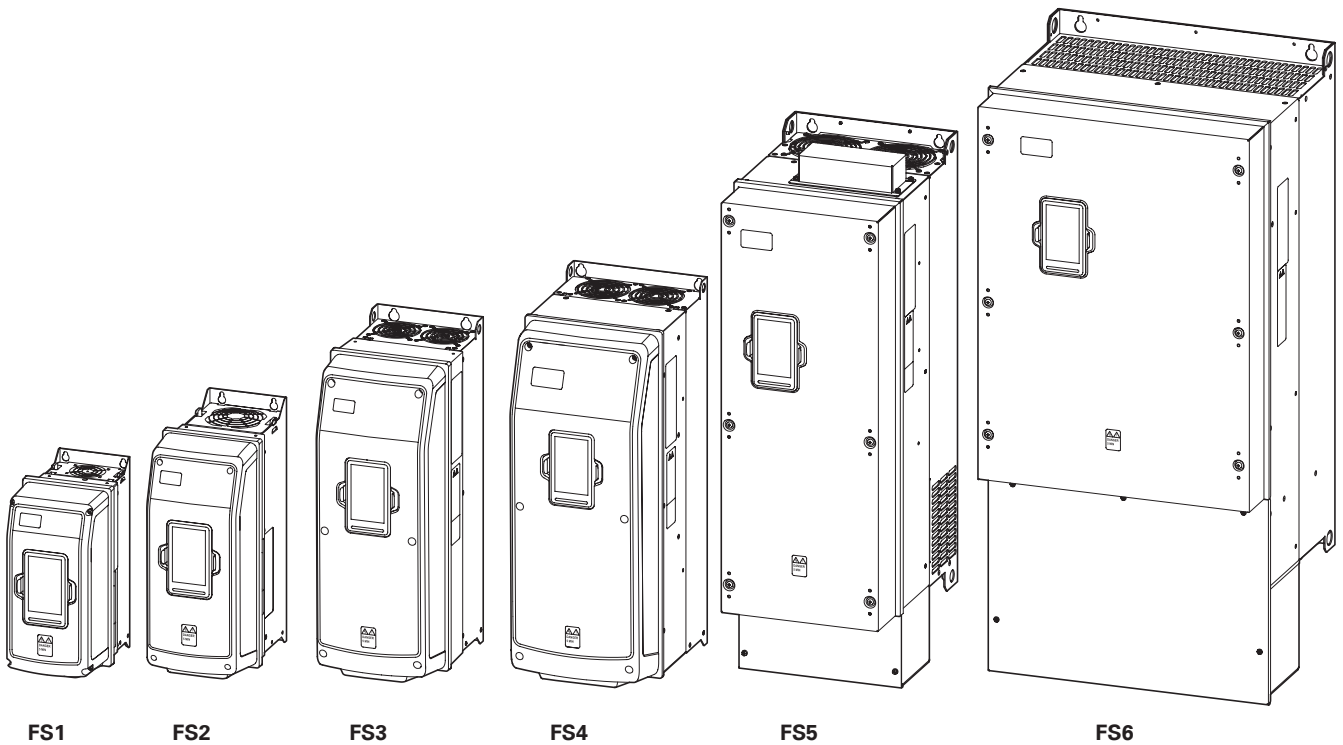

Ordering

Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW		HP	$I_n = 110\%$ I_e A						kW	HP
U₂ 230 V AC, three-phase / U₂ 230 V AC, three-phase, with BU, IP21												
Supply voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
3.7	0.75	0.75	4.8	1.1	1	✓	✓	✓	FS1	IP21/NEMA1	DX1-323D7FB-T21CE 3-6021-131B	1 unit
4.8	1.1	1	6.6	1.5	1.5	✓	✓	✓			DX1-324D8FB-T21CE 3-6021-132B	
6.6	1.5	1.5	7.8	1.5	2	✓	✓	✓			DX1-326D6FB-T21CE 3-6021-133B	
7.8	1.5	2	11	2.2	3	✓	✓	✓			DX1-327D8FB-T21CE 3-6021-134B	
11	2.2	3	12.5	3	3	✓	✓	✓			DX1-32011FB-T21CE 3-6021-135B	
12.5	3	3	17.5	4	5	✓	✓	✓	FS2		DX1-32012FB-T21CE 3-6022-131B	
17.5	4	5	25	5.5	7.5	✓	✓	✓			DX1-32017FB-T21CE 3-6022-132B	
25	5.5	7.5	31	7.5	10	✓	✓	✓			DX1-32025FB-T21CE 3-6022-133B	
31	7.5	10	48	11	15	✓	✓	✓	FS3		DX1-32031FB-T21CE 3-6023-131B	
48	11	15	61	15	20	✓	✓	✓			DX1-32048FB-T21CE 3-6023-132B	
61	15	20	75	22	25	✓	✓	✓	FS4		DX1-32061FB-T21CE 3-6024-131B	
75	22	25	88	22	30	✓	✓	✓			DX1-32075FB-T21CE 3-6024-132B	
88	22	30	114	30	40	✓	✓	✓			DX1-32088FB-T21CE 3-6024-133B	
114	30	40	143	45	50	✓	✓	✓	FS5		DX1-32114FB-T21CE 3-6025-131B	
143	45	50	170	45	60	✓	✓	✓			DX1-32143FB-T21CE 3-6025-132B	
170	45	60	211	55	75	✓	✓	✓			DX1-32170FB-T21CE 3-6025-133B	
211	55	75	261	75	100	✓	✓	✓	FS6		DX1-32211FB-T21CE 3-6026-131B	
248	75	100	312	90	125	✓	✓	✓			DX1-32248FB-T21CE 3-6026-132B	
U₂ 230 V AC, three-phase / U₂ 230 V AC, three-phase, without BU, IP21												
Supply voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
61	15	20	75	22	25	✓	-	✓	FS4	IP21/NEMA1	DX1-32061FN-T21CE 3-6024-111B	1 unit
75	22	25	88	22	30	✓	-	✓			DX1-32075FN-T21CE 3-6024-112B	
88	22	30	114	30	40	✓	-	✓			DX1-32088FN-T21CE 3-6024-113B	
114	30	40	143	45	50	✓	-	✓	FS5		DX1-32114FN-T21CE 3-6025-111B	
143	45	50	170	45	60	✓	-	✓			DX1-32143FN-T21CE 3-6025-112B	
170	45	60	211	55	75	✓	-	✓			DX1-32170FN-T21CE 3-6025-113B	
211	55	75	261	75	100	✓	-	✓	FS6		DX1-32211FN-T21CE 3-6026-111B	
248	75	100	312	90	125	✓	-	✓			DX1-32248FN-T21CE 3-6026-112B	

Notes

¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature

²⁾ For normal four-pole, internally and externally ventilated three-phase asynchronous motors with 1500 min-1 at 50 Hz or 1800 min-1 at 60 Hz

³⁾ At 400 V, 50 Hz / at 480 V, 60 Hz

2.7

DX1 variable frequency drives up to 160 kW

DX1, for three-phase motors 230 V, three-phase

Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW		HP	$I_n = 110\%$ I_e A						kW	HP
U_e 230 V AC, three-phase / U₂ 230 V AC, three-phase, with BU, IP54												
Supply voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
3.7	0.75	0.75	4.8	1.1	1	✓	✓	✓	FS1	IP54/NEMA12	DX1-323D7FB-T54CE 3-6021-171B	1 unit
4.8	1.1	1	6.6	1.5	1.5	✓	✓	✓			DX1-324D8FB-T54CE 3-6021-172B	
6.6	1.5	1.5	7.8	1.5	2	✓	✓	✓			DX1-326D6FB-T54CE 3-6021-173B	
7.8	1.5	2	11	2.2	3	✓	✓	✓			DX1-327D8FB-T54CE 3-6021-174B	
11	2.2	3	12.5	3	3	✓	✓	✓			DX1-32011FB-T54CE 3-6021-175B	
12.5	3	3	17.5	4	5	✓	✓	✓	FS2		DX1-32012FB-T54CE 3-6022-171B	
17.5	4	5	25	5.5	7.5	✓	✓	✓			DX1-32017FB-T54CE 3-6022-172B	
25	5.5	7.5	31	7.5	10	✓	✓	✓			DX1-32025FB-T54CE 3-6022-173B	
31	7.5	10	48	11	15	✓	✓	✓	FS3		DX1-32031FB-T54CE 3-6023-171B	
48	11	15	61	15	20	✓	✓	✓			DX1-32048FB-T54CE 3-6023-172B	
61	15	20	75	22	25	✓	✓	✓	FS4		DX1-32061FB-T54CE 3-6024-171B	
75	22	25	88	22	30	✓	✓	✓			DX1-32075FB-T54CE 3-6024-172B	
88	22	30	114	30	40	✓	✓	✓			DX1-32088FB-T54CE 3-6024-173B	
114	30	40	143	45	50	✓	✓	✓	FS5		DX1-32114FB-T54CE 3-6025-171B	
143	45	50	170	45	60	✓	✓	✓			DX1-32143FB-T54CE 3-6025-172B	
170	45	60	211	55	75	✓	✓	✓			DX1-32170FB-T54CE 3-6025-173B	
211	55	75	261	75	100	✓	✓	✓	FS6		DX1-32211FB-T54CE 3-6026-171B	
248	75	100	312	90	125	✓	✓	✓			DX1-32248FB-T54CE 3-6026-172B	
U_e 230 V AC, three-phase / U₂ 230 V AC, three-phase, without BU, IP54												
Supply voltage (50/60Hz) U _{LN} : 200 (-15%) - 240 (+10%) V												
61	15	20	75	22	25	✓	✓	✓	FS4	IP54/NEMA12	DX1-32061FN-T54CE 3-6024-151B	1 unit
75	22	25	88	22	30	✓	✓	✓			DX1-32075FN-T54CE 3-6024-152B	
88	22	30	114	30	40	✓	✓	✓			DX1-32088FN-T54CE 3-6024-153B	
114	30	40	143	45	50	✓	✓	✓	FS5		DX1-32114FN-T54CE 3-6025-151B	
143	45	50	170	45	60	✓	✓	✓			DX1-32143FN-T54CE 3-6025-152B	
170	45	60	211	55	75	✓	✓	✓			DX1-32170FN-T54CE 3-6025-153B	
211	55	75	261	75	100	✓	✓	✓	FS6		DX1-32211FN-T54CE 3-6026-151B	
248	75	100	312	90	125	✓	✓	✓			DX1-32248FN-T54CE 3-6026-152B	

Notes

¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature

²⁾ For normal four-pole, internally and externally ventilated three-phase asynchronous motors with 1500 min-1 at 50 Hz or 1800 min-1 at 60 Hz

³⁾ At 400 V, 50 Hz / at 480 V, 60 Hz

Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operational current ¹⁾	Assigned motor power ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW		HP	$I_n = 110\%$ I_e A						kW	HP
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, with BU, IP21												
Mains voltage (50/60 Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
2.2	0.75	1	3.3	1.1	1.5	✓	✓	✓	FS1	IP21/NEMA1	DX1-342D2FB-T21CE 3-6041-131B	
3.3	1.1	1.5	4.3	1.5	2	✓	✓	✓			DX1-343D3FB-T21CE 3-6041-132B	
4.3	1.5	2	5.6	2.2	3	✓	✓	✓			DX1-344D3FB-T21CE 3-6041-133B	
5.6	2.2	3	7.6	3	5	✓	✓	✓			DX1-345D6FB-T21CE 3-6041-134B	
7.6	3	5	9	4	5	✓	✓	✓			DX1-347D6FB-T21CE 3-6041-135B	
9	4	5	12	5.5	7.5	✓	✓	✓			DX1-349D0FB-T21CE 3-6041-136B	
12	5.5	7.5	16	7.5	10	✓	✓	✓	FS2		DX1-34012FB-T21CE 3-6042-131B	
16	7.5	10	23	11	15	✓	✓	✓			DX1-34016FB-T21CE 3-6042-132B	
23	11	15	31	15	20	✓	✓	✓			DX1-34023FB-T21CE 3-6042-133B	
31	15	20	38	18.5	25	✓	✓	✓	FS3		DX1-34031FB-T21CE 3-6043-131B	
38	18.5	25	46	22	30	✓	✓	✓			DX1-34038FB-T21CE 3-6043-132B	
46	22	30	61	30	40	✓	✓	✓			DX1-34046FB-T21CE 3-6043-133B	
61	30	40	72	37	50	✓	✓	✓	FS4		DX1-34061FB-T21CE 3-6044-131B	
72	37	50	87	45	60	✓	✓	✓			DX1-34072FB-T21CE 3-6044-132B	
87	45	60	105	55	75	✓	✓	✓			DX1-34087FB-T21CE 3-6044-133B	
105	55	75	140	75	100	✓	✓	✓	FS5		DX1-34105FB-T21CE 3-6045-131B	
140	75	100	170	90	125	✓	✓	✓			DX1-34140FB-T21CE 3-6045-132B	
170	90	125	205	110	150	✓	✓	✓			DX1-34170FB-T21CE 3-6045-133B	
205	110	150	261	132	200	✓	✓	✓	FS6		DX1-34205FB-T21CE 3-6046-131B	
245	132	200	310	160	250	✓	✓	✓			DX1-34245FB-T21CE 3-6046-132B	
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, without BU, IP21												
Mains voltage (50/60 Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
61	30	40	72	37	50	✓	✓	✓	FS4	IP21/NEMA1	DX1-34061FN-T21CE 3-6044-111B	1 unit
72	37	50	87	45	60	✓	✓	✓			DX1-34072FN-T21CE 3-6044-112B	
87	45	60	105	55	75	✓	✓	✓			DX1-34087FN-T21CE 3-6044-113B	
105	55	75	140	75	100	✓	✓	✓	FS5		DX1-34105FN-T21CE 3-6045-111B	
140	75	100	170	90	125	✓	✓	✓			DX1-34140FN-T21CE 3-6045-112B	
170	90	125	205	110	150	✓	✓	✓			DX1-34170FN-T21CE 3-6045-113B	
205	110	150	261	132	200	✓	✓	✓	FS6		DX1-34205FN-T21CE 3-6046-111B	
245	132	200	310	160	250	✓	✓	✓			DX1-34245FN-T21CE 3-6046-112B	

Notes¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

2.7

DX1 variable frequency drives up to 160 kW

DX1 for three-phase motors 400 V, three-phase

Rated operational current ¹⁾	Assigned motor output ¹⁾²⁾³⁾		Rated operational current ¹⁾	Assigned motor output ¹⁾²⁾³⁾		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW		HP	$I_n = 110\%$ I_e A						kW	HP
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, with BU, IP54												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
2.2	0.75	1	3.3	1.1	1.5	✓	✓	✓	FS1	IP54/NEMA12	DX1-342D2FB-T54CE 3-6041-171B	1 unit
3.3	1.1	1.5	4.3	1.5	2	✓	✓	✓			DX1-343D3FB-T54CE 3-6041-172B	
4.3	1.5	2	5.6	2.2	3	✓	✓	✓			DX1-344D3FB-T54CE 3-6041-173B	
5.6	2.2	3	7.6	3	5	✓	✓	✓			DX1-345D6FB-T54CE 3-6041-174B	
7.6	3	5	9	4	5	✓	✓	✓			DX1-347D6FB-T54CE 3-6041-175B	
9	4	5	12	5.5	7.5	✓	✓	✓			DX1-349D0FB-T54CE 3-6041-176B	
12	5.5	7.5	16	7.5	10	✓	✓	✓	FS2		DX1-34012FB-T54CE 3-6042-171B	
16	7.5	10	23	11	15	✓	✓	✓			DX1-34016FB-T54CE 3-6042-172B	
23	11	15	31	15	20	✓	✓	✓			DX1-34023FB-T54CE 3-6042-173B	
31	15	20	38	18.5	25	✓	✓	✓	FS3		DX1-34031FB-T54CE 3-6043-171B	
38	18.5	25	46	22	30	✓	✓	✓			DX1-34038FB-T54CE 3-6043-172B	
46	22	30	61	30	40	✓	✓	✓			DX1-34046FB-T54CE 3-6043-173B	
61	30	40	72	37	50	✓	✓	✓	FS4		DX1-34061FB-T54CE 3-6044-171B	
72	37	50	87	45	60	✓	✓	✓			DX1-34072FB-T54CE 3-6044-172B	
87	45	60	105	55	75	✓	✓	✓			DX1-34087FB-T54CE 3-6044-173B	
105	55	75	140	75	100	✓	✓	✓	FS5		DX1-34105FB-T54CE 3-6045-171B	
140	75	100	170	90	125	✓	✓	✓			DX1-34140FB-T54CE 3-6045-172B	
170	90	125	205	110	150	✓	✓	✓			DX1-34170FB-T54CE 3-6045-173B	
205	110	150	261	132	200	✓	✓	✓	FS6		DX1-34205FB-T54CE 3-6046-171B	
245	132	200	310	160	250	✓	✓	✓			DX1-34245FB-T54CE 3-6046-172B	
U_e 400 V AC, three-phase / U₂ 400 V AC, three-phase, without BU, IP54												
Mains voltage (50/60 Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
61	30	40	72	37	50	✓	✓	✓	FS4	IP54/NEMA12	DX1-34061FN-T54CE 3-6044-151B	1 unit
72	37	50	87	45	60	✓	✓	✓			DX1-34072FN-T54CE 3-6044-152B	
87	45	60	105	55	75	✓	✓	✓			DX1-34087FN-T54CE 3-6044-153B	
105	55	75	140	75	100	✓	✓	✓	FS5		DX1-34105FN-T54CE 3-6045-151B	
140	75	100	170	90	125	✓	✓	✓			DX1-34140FN-T54CE 3-6045-152B	
170	90	125	205	110	150	✓	✓	✓			DX1-34170FN-T54CE 3-6045-153B	
205	110	150	261	132	200	✓	✓	✓	FS6		DX1-34205FN-T54CE 3-6046-151B	
245	132	200	310	160	250	✓	✓	✓			DX1-34245FN-T54CE 3-6046-152B	

Notes

¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature

²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz

DX1 variable frequency drives up to 160 kW

2.7

DX1 for three-phase motors 575 V, three-phase

Rated operational current ¹⁾	Assigned motor output ¹⁾²⁾³⁾		Rated operational current ¹⁾	Assigned motor output ¹⁾²⁾³⁾		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW		HP	$I_n = 110\%$ I_e A						kW	HP
U₀ 575 V AC, three-phase / U₂ 575 V AC, three-phase, with BU, IP21												
Mains voltage (50/60 Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
3.3	1.5	2	4.5	2.2	3	✓	✓	✓	FS1	IP21/NEMA1	DX1-353D3FB-T21CE 3-6051-131B	1 unit
4.5	2.2	3	7.5	4	5	✓	✓	✓			DX1-354D5FB-T21CE 3-6051-132B	
7.5	4	5	10	5.5	7.5	✓	✓	✓			DX1-357D5FB-T21CE 3-6051-133B	
10	5.5	7.5	13.5	7.5	10	✓	✓	✓	FS2		DX1-35010FB-T21CE 3-6052-131B	
13.5	7.5	10	18	11	15	✓	✓	✓			DX1-35013FB-T21CE 3-6052-132B	
18	11	15	22	15	20	✓	✓	✓			DX1-35018FB-T21CE 3-6052-133B	
22	15	20	27	18.5	25	✓	✓	✓	FS3		DX1-35022FB-T21CE 3-6053-131B	
27	18.5	25	34	22	30	✓	✓	✓			DX1-35027FB-T21CE 3-6053-132B	
34	22	30	41	30	40	✓	✓	✓			DX1-35034FB-T21CE 3-6053-133B	
41	30	40	52	37	50	✓	✓	✓	FS4		DX1-35041FB-T21CE 3-6054-131B	
52	37	50	62	45	60	✓	✓	✓			DX1-35052FB-T21CE 3-6054-132B	
62	45	60	80	55	75	✓	✓	✓			DX1-35062FB-T21CE 3-6054-133B	
80	55	75	100	75	100	✓	✓	✓	FS5		DX1-35080FB-T21CE 3-6055-131B	
100	75	100	125	90	125	✓	✓	✓			DX1-35100FB-T21CE 3-6055-132B	
125	90	125	144	110	150	✓	✓	✓			DX1-35125FB-T21CE 3-6055-133B	
144	110	150	208	160	200	✓	✓	✓	FS6		DX1-35144FB-T21CE 3-6056-131B	
208	160	200	250	200	250	✓	✓	✓			DX1-35208FB-T21CE 3-6056-132B	
U₀ 575 V AC, three-phase / U₂ 575 V AC, three-phase, without BU, IP21												
Mains voltage (50/60 Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
41	30	40	52	37	50	✓	✓		FS4	IP21/NEMA1	DX1-35041FN-T21CE 3-6054-111B	1 unit
52	37	50	62	45	60	✓	✓				DX1-35052FN-T21CE 3-6054-112B	
62	45	60	80	55	75	✓	✓				DX1-35062FN-T21CE 3-6054-113B	
80	55	75	100	75	100	✓	✓		FS5		DX1-35080FN-T21CE 3-6055-111B	
100	75	100	125	90	125	✓	✓				DX1-35100FN-T21CE 3-6055-112B	
125	90	125	144	110	150	✓	✓				DX1-35125FN-T21CE 3-6055-113B	
144	110	150	208	160	200	✓	✓		FS6		DX1-35144FN-T21CE 3-6056-111B	
208	160	200	250	200	250	✓	✓				DX1-35208FN-T21CE 3-6056-112B	

Notes

¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature

²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz

³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz









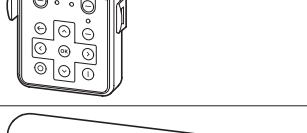
2.7

DX1 variable frequency drives up to 160 kW

DX1 for three-phase motors 575 V, three-phase

Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Rated operational current ¹⁾	Assigned motor output ^{1) 2) 3)}		Configuration	Frame size	Protection type	Model code Catalog number	Std. pack		
	$I_n = 150\%$ I_e A	kW HP		$I_n = 110\%$ I_e A	kW HP						Radio interference suppression filter	Brake chopper
U₀ 575 V AC, three-phase / U₂ 575 V AC, three-phase, with BU, IP54												
Mains voltage (50/60Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
3.3	1.5	2	4.5	2.2	3	✓	✓	✓	FS1	IP54/NEMA12	DX1-353D3FB-T54CE 3-6051-171B	1 unit
4.5	2.2	3	7.5	4	5	✓	✓	✓			DX1-354D5FB-T54CE 3-6051-172B	
7.5	4	5	10	5.5	7.5	✓	✓	✓			DX1-357D5FB-T54CE 3-6051-173B	
10	5.5	7.5	13.5	7.5	10	✓	✓	✓	FS2		DX1-35010FB-T54CE 3-6052-171B	
13.5	7.5	10	18	11	15	✓	✓	✓			DX1-35013FB-T54CE 3-6052-172B	
18	11	15	22	15	20	✓	✓	✓			DX1-35018FB-T54CE 3-6052-173B	
22	15	20	27	18.5	25	✓	✓	✓	FS3		DX1-35022FB-T54CE 3-6053-171B	
27	18.5	25	34	22	30	✓	✓	✓			DX1-35027FB-T54CE 3-6053-172B	
34	22	30	41	30	40	✓	✓	✓			DX1-35034FB-T54CE 3-6053-173B	
41	30	40	52	37	50	✓	✓	✓	FS4		DX1-35041FB-T54CE 3-6054-171B	
52	37	50	62	45	60	✓	✓	✓			DX1-35052FB-T54CE 3-6054-172B	
62	45	60	80	55	75	✓	✓	✓			DX1-35062FB-T54CE 3-6054-173B	
80	55	75	100	75	100	✓	✓	✓	FS5		DX1-35080FB-T54CE 3-6055-171B	
100	75	100	125	90	125	✓	✓	✓			DX1-35100FB-T54CE 3-6055-172B	
125	90	125	144	110	150	✓	✓	✓			DX1-35125FB-T54CE 3-6055-173B	
144	110	150	208	160	200	✓	✓	✓	FS6		DX1-35144FB-T54CE 3-6056-171B	
208	160	200	250	200	250	✓	✓	✓			DX1-35208FB-T54CE 3-6056-172B	
U₀ 575 V AC, three-phase / U₂ 575 V AC, three-phase, without BU, IP54												
Mains voltage (50/60 Hz) U _{LN} : 380 (-15%) - 500 (+10%) V												
41	30	40	52	37	50	✓	✓		FS4	IP21/NEMA1	DX1-35041FN-T54CE 3-6054-151B	
52	37	50	62	45	60	✓	✓				DX1-35052FN-T54CE 3-6054-152B	
62	45	60	80	55	75	✓	✓				DX1-35062FN-T54CE 3-6054-153B	
80	55	75	100	75	100	✓	✓		FS5		DX1-35080FN-T54CE 3-6055-151B	
100	75	100	125	90	125	✓	✓				DX1-35100FN-T54CE 3-6055-152B	
125	90	125	144	110	150	✓	✓				DX1-35125FN-T54CE 3-6055-153B	
144	110	150	208	160	200	✓	✓		FS6		DX1-35144FN-T54CE 3-6056-151B	
208	160	200	250	200	250	✓	✓				DX1-35208FN-T54CE 3-6056-152B	
Notes	¹⁾ Overload cycle for 60 s every 600 s, 150% at 50 °C ambient temperature, 110% at 40 °C ambient temperature ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz ³⁾ At 400 V, 50 Hz/at 480 V, 60 Hz											

Accessories


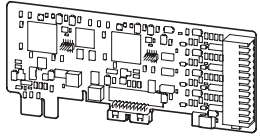
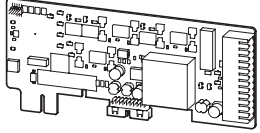
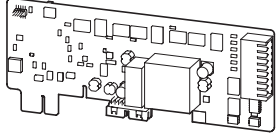




	Description	Model code Catalog number	Std. pack
	DX1 Functional Safety Card	DXX-EXT-FS 3-5962-001A	1 unit
	DX1 ABZ Encoder Card	DXX-EXT-ABZ 3-5963-001A	
	DX1 Safe ABZ Encoder Card	DXX-EXT-SABZ 3-5964-001A	
	DX1 Optical Fiber Card	DXX-EXT-OF 3-5965-001A	
	DX1 Dual Port EIP Card	DXX-NET-EIP 3-5966-001A	
	DX1 Dual Port PROFINET Card	DXX-NET-PROFINET 3-5967-001A	
	DX1 Touch Screen Keypad Kit	DXX-KEY-TS 3-5969-001A	
	DX1 Membrane Switch Keypad Kit	DXX-KEY-LCD 3-5970-001A	
	DX1 Keypad Remote Mounting Kit	DXX-KEY-RMTKIT 3-5968-001A	



2.7

DX1 variable frequency drives up to 160 kW

Accessories

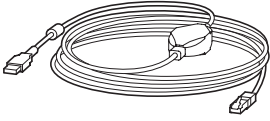	Description	Model code Catalog number	Std. pack
	DX1 OPTICAL FIBER CABLE CONNECTOR KIT	DXX-CBL-FBRKIT 3-5971-004A	1 unit
	DX1 SERIAL PROGRAMMING KIT	DXX-CBL-PCCABLE 3-5975-001A	
	DX1 1M OPTICAL FIBER CABLE	DXX-CBL-FBR1M 3-5971-001A	
	DX1 5M OPTICAL FIBER CABLE	DXX-CBL-FBR5M 3-5971-002A	
	DX1 10M OPTICAL FIBER CABLE	DXX-CBL-FBR10M 3-5971-003A	
	DX1 3 X DI, 3 X DO, 1 X THERMI	DXX-EXT-3DI3DO1T 3-6011-001A	
	DX1 1 X AI, 2 X AO (ISOLATED T	DXX-EXT-1AI2AO 3-6012-001A	
	DX1 3 X RELAY DRY CONTACT (2NO	DXX-EXT-3RO 3-6013-001A	
	DX1 3 X PT100 RTD THERMISTER I	DXX-EXT-THER1 3-6014-001A	
	DX1 6 X DI 240VAC INPUT OPTION	DXX-EXT-6DI 3-6015-001A	
Spareparts			
	DX1 FUNCTIONAL SAFETY CARD TERMINAL BLOCK	DXX-ACC-FSTB 3-5972-001A	1 unit
	DX1 ABZ ENCODER CARD TERMINAL BLOCK	DXX-ACC-ABZTB 3-5973-001A	
	DX1 SAFE ABZ ENCODER CARD TERMINAL BLOCK	DXX-ACC-SABZTB 3-5974-001A	
	DX1 Control Board Screw Type Terminal Blocks	DXX-SPR-SCREWTB 3-5976-001A	
	DX1 Control Board Push-in Type Terminal Blocks	DXX-SPR-PUSHINTB 3-5977-001A	



2.7

DX1 variable frequency drives up to 160 kW

Assigned switching and protective elements for DX1

Engineering

Model code	power rating 110 % kW	input current 110 % A	output current 110 % A	power rating 150 % kW	input current 150 % A	output current 150 % A	MCCB Type 1 coordination @ 110 %	Fuse Type 1 coordination @ 110 %	MCCB Type 1 coordination @ 150 %	Fuse Type 1 coordination @ 150 %
230 V AC, three-phase/230 V AC, three-phase										
DX1-323D7...	1.1	4.4	4.8	0.75	3.2	3.7	PKZM0-6,3	C10G8	PKZM0-6,3	C10G8
DX1-324D8...	1.5	6.1	6.6	1.1	4.4	4.8	PKZM0-10	C10G10	PKZM0-10	C10G10
DX1-326D6...	1.5	7.2	7.8	1.5	6.1	6.6	PKZM0-10	C10G10	PKZM0-10	C10G10
DX1-327D8...	2.2	10.2	11	1.5	7.2	7.8	PKZM0-12	C10G12	PKZM0-12	C10G12
DX1-32011...	3	11.6	12.5	2.2	10.2	11	PKZM0-16	C10G16	PKZM0-16	C10G16
DX1-32012...	4	16.3	17.5	3	10.2	12.5	PKZM0-20	C10G20	PKZM0-16	C10G16
DX1-32017...	5.5	23.2	25	4	16.2	17.5	PKZM0-32	C10G32	PKZM0-25	C10G25
DX1-32025...	7.5	29	31	5.5	23.1	25	PKZM0-32	C10G32	PKZM4-40	C22G40
DX1-32031...	11	44.2	48	7.5	28.7	31	PKZM4-50	C22G50	PKZM4-50	C22G50
DX1-32048...	15	56	61	11	44.4	48	PKZM4-63	C22G63	NZMC1-A80	C22G80
DX1-32061...	22	64.6	75	15	56.4	61	NZMC1-A80	C22G80	NZMC1-A100	C22G100
DX1-32075...	22	78	88	22	69.4	75	NZMC1-A100	C22G100	NZMC1-A125	C22G125
DX1-32088...	30	94.3	114	22	81.4	88	NZMC1-A125	C22G125	NZMC1-A125	C22G125
DX1-32114...	45	129	143	30	105.5	114	NZMC1-A160	160NHG02B-400	NZMC1-A160	160NHG02B-400
DX1-32143...	45	157	170	45	132.3	143	NZMC2-A200	200NHG02B-400	NZMC2-A200	200NHG02B-400
DX1-32170...	55	189	211	45	157.3	170	NZMC2-A250	250NHG02B-400	NZMC2-A250	250NHG02B-400
DX1-32211...	75	242.8	261	55	196.3	211	NZMC2-A300	315NHG2B-400	NZMC2-A300	315NHG2B-400
DX1-32248...	90	290.3	312	75	230.7	248	NZMC3-A400	400NHG03B-400	NZMC3-A400	400NHG03B-400
400 V AC, three-phase/400 V AC, three-phase										
DX1-342D2...	1.1	3.1	3.3	0.75	2	2.2	PKZM0-6,3	C10G8	PKZM0-6,3	C10G8
DX1-343D3...	1.5	4	4.3	1.1	3.1	3.3	PKZM0-6,3	C10G8	PKZM0-6,3	C10G8
DX1-344D3...	2.2	5.2	5.6	1.5	4	4.3	PKZM0-6,3	C10G8	PKZM0-10	C10G10
DX1-345D6...	3	7.1	7.6	2.2	5.2	5.6	PKZM0-10	C10G10	PKZM0-10	C10G10
DX1-347D6...	4	8.4	9	3	7.1	7.6	PKZM0-10	C10G10	PKZM0-12	C10G12
DX1-349D0...	5.5	11.2	12	4	8.4	9	PKZM0-16	C10G16	PKZM0-16	C10G16
DX1-34012...	7.5	15	16	5.5	11.2	12	PKZM0-20	C10G20	PKZM0-25	C10G25
DX1-34016...	11	21.5	23	7.5	14.9	16	PKZM0-25	C10G25	PKZM0-25	C10G25
DX1-34023...	15	29	31	11	21.4	23	PKZM0-32	C10G32	PKZM4-40	C22G40
DX1-34031...	18.5	35.2	38	15	28.8	31	PKZM4-40	C22G40	PKZM4-50	C22G50
DX1-34038...	22	42.6	46	18.5	35.3	38	PKZM4-50	C22G50	PKZM4-63	C22G63
DX1-34046...	30	55.7	61	22	42.8	46	PKZM4-63	C22G63	NZMC1-A80	C22G80
DX1-34061...	37	65.7	72	30	56.7	61	NZMC1-A80	C22G80	NZMC1-A100	C22G100
DX1-34072...	45	79.4	87	37	66.9	72	NZMC1-A100	C22G100	NZMC1-A125	C22G125
DX1-34087...	55	97	105	45	80.9	87	NZMC1-A125	C22G125	NZMC1-A125	C22G125
DX1-34105...	75	129	140	55	97.6	105	NZMC1-A160	160NHG02B-400	NZMC1-A160	160NHG02B-400
DX1-34140...	90	157	170	75	130.1	140	NZMC2-A200	200NHG02B-400	NZMC2-A200	200NHG02B-400
DX1-34170...	110	189	205	90	158	170	NZMC2-A250	250NHG02B-400	NZMC2-A250	250NHG02B-400
DX1-34205...	132	246.2	261	110	193.4	205	NZMC2-A300	315NHG2B-400	NZMC2-A300	315NHG2B-400
DX1-34245...	160	292.4	310	132	231.1	245	NZMC3-A400	400NHG03B-400	NZMC3-A400	400NHG03B-400
575 V AC, three-phase/575 V AC, three-phase										
DX1-353D3...	2.2	4.2	4.5	1.5	3.1	3.3	PKZM0-6,3	C14G8	PKZM0-6,3	C14G8
DX1-354D5...	4	7	7.5	2.2	4.2	4.5	PKZM0-10	C14G10	PKZM0-10	C14G10
DX1-357D5...	5.5	9.3	10	4	7	7.5	PKZM0-12	C14G12	PKZM0-12	C14G12
DX1-35010...	7.5	12.5	13.5	5.5	9.3	10	PKZM0-16	C14G16	PKZM0-16	C14G16
DX1-35013...	11	16.7	18	7.5	12.5	13.5	PKZM0-20	C14G20	PKZM0-20	C14G20
DX1-35018...	15	20.4	22	11	16.7	18	PKZM0-25	C14G25	PKZM0-32	C22G32
DX1-35022...	18.5	25.2	27	15	20.4	22	PKZM0-32	C22G32	PKZM0-32	C22G32
DX1-35027...	22	31.7	34	18.5	25.1	27	PKZM4-40	C22G40	PKZM4-40	C22G40
DX1-35034...	30	38.2	41	22	31.6	34	PKZM4-50	C22G50	PKZM4-50	C22G50
DX1-35041...	37	48.1	52	30	38.1	41	PKZM4-63	C22G63	PKZM4-63	C22G63
DX1-35052...	45	57.4	62	37	48.3	52	NZMC1-A80	80NHG1B-690	NZMC1-A80	80NHG1B-690
DX1-35062...	55	73	80	45	57.6	62	NZMC1-A100	100NHG1B-690	NZMC1-A100	100NHG1B-690
DX1-35080...	75	91.3	100	55	74.4	80	NZMC1-A125	125NHG1B-690	NZMC1-A125	125NHG1B-690
DX1-35100...	90	114.1	125	75	93	100	NZMC1-A160	160NHG1B-690	NZMC1-A160	160NHG1B-690
DX1-35125...	110	132.9	144	90	116.2	125	NZMC1-A160	160NHG1B-690	NZMC2-A200	200NHG1B-690
DX1-35144...	160	202.8	208	110	140.4	144	NZMC2-A250	250NHG1B-690	NZMC2-A250	250NHG1B-690
DX1-35208...	200	243.8	250	160	202.8	208	NZMC2-A300	315NHG3B-690	NZMC3-A400	400NHG3B-690

DX1 variable frequency drives up to 160 kW

2.7

Assigned switching and protective elements for DX1

minimum braking resistance	brake resistor, 10 % duty cycle @ 110 %	brake resistor, 20 % duty cycle @ 110 %	brake resistor, 40 % duty cycle @ 110 %	brake resistor, 10 % duty cycle @ 150 %	brake resistor, 20 % duty cycle @ 150 %	brake resistor, 40 % duty cycle @ 150 %
30	DX-BR050-600	DX-BR050-600	DX-BR050-0K8	DX-BR050-600	DX-BR050-600	DX-BR050-0K8
30	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1	DX-BR050-600	DX-BR050-600	DX-BR050-0K8
30	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1
30	DX-BR050-600	DX-BR050-0K8	DX-BR040-3K1	DX-BR050-600	DX-BR050-0K8	DX-BR035-1K1
30	DX-BR050-0K8	DX-BR035-1K1	DX-BR040-3K1	DX-BR050-600	DX-BR050-0K8	DX-BR040-3K1
20	DX-BR022-1K4	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-1K4	DX-BR022-1K4	DX-BR022-3K1
20	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-5K1	DX-BR022-1K4	DX-BR022-1K4	DX-BR022-3K1
20	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-5K1	DX-BR022-1K4	DX-BR022-3K1	DX-BR022-5K1
10	DX-BR012-3K1	DX-BR012-5K1	DX-BR012-9K2	DX-BR012-3K1	DX-BR012-3K1	DX-BR012-5K1
10	DX-BR012-3K1	DX-BR012-5K1	DX-BR012-9K2	DX-BR012-3K1	DX-BR012-5K1	DX-BR012-9K2
3.3	DX-BR006-5K1	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-5K1	DX-BR006-5K1	DX-BR006-9K2
3.3	DX-BR006-5K1	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-5K1	DX-BR006-9K2	DX-BR006-18K1
3.3	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-18K1	DX-BR006-5K1	DX-BR006-9K2	DX-BR006-18K1
1.4	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-18K1
1.4	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
1.4	DX-BR006-18K1	DX-BR006-18K1	DX-BR006-33K3	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
1.4	DX-BR006-18K1	DX-BR006-33K3	DX-BR002-54K3	DX-BR006-9K2	DX-BR006-18K1	DX-BR006-33K3
1.4	DX-BR006-18K1	DX-BR006-33K3	DX-BR002-54K3	DX-BR006-18K1	DX-BR006-33K3	DX-BR002-54K3
63	DX-BR100-240	DX-BR100-600	DX-BR100-1K1	DX-BR100-240	DX-BR100-600	DX-BR100-1K1
63	DX-BR100-600	DX-BR100-1K1	DX-BR075-1K1	DX-BR100-240	DX-BR100-600	DX-BR100-1K1
63	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K6	DX-BR100-600	DX-BR100-1K1	DX-BR075-1K1
63	DX-BR100-1K1	DX-BR075-1K1	P: 2x DX-BR150-1K1	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K6
63	DX-BR100-1K1	DX-BR100-1K6	DX-BR075-5K1	DX-BR100-1K1	DX-BR075-1K1	P: 2x DX-BR150-1K1
63	DX-BR075-1K1	P: 2x DX-BR150-1K1	DX-BR075-5K1	DX-BR100-1K1	DX-BR100-1K6	DX-BR075-5K1
42	DX-BR047-3K1	DX-BR047-3K1	DX-BR050-5K1	DX-BR075-1K1	DX-BR047-3K1	DX-BR050-5K1
42	DX-BR047-3K1	DX-BR050-5K1	P: 2x DX-BR100-6K2	DX-BR047-3K1	DX-BR047-3K1	DX-BR050-5K1
42	DX-BR047-3K1	DX-BR050-5K1	P: 2x DX-BR100-6K2	DX-BR047-3K1	DX-BR050-5K1	P: 2x DX-BR100-6K2
14	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2	DX-BR022-3K1	DX-BR022-5K1	DX-BR022-9K2
14	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2
14	DX-BR022-9K2	P: 2 x DX-BR050-5K1	P: 2 x DX-BR047-9K2	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2
6.5	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR022-9K2	DX-BR012-9K2	P: 2 x DX-BR022-5K1	DX-BR012-18K1
6.5	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR022-9K2	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR022-9K2
6.5	P: 2 x DX-BR022-5K1	P: 2 x DX-BR022-9K2	R: 2 x DX-BR006-33K3	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR022-9K2
3.3	DX-BR006-18K1	DX-BR006-33K3	R: 2 x DX-BR002-54K3	DX-BR006-18K1	DX-BR006-33K3	DX-BR006-33K3
3.3	DX-BR006-18K1	DX-BR006-33K3	R: 2 x DX-BR002-54K3	DX-BR006-18K1	DX-BR006-33K3	R: 2 x DX-BR002-54K3
3.3	DX-BR006-33K3	R: 2 x DX-BR002-54K3	R: 2 x DX-BR002-102K4	DX-BR006-18K1	DX-BR006-33K3	R: 2 x DX-BR002-54K3
3.3	DX-BR006-33K3	R: 2 x DX-BR002-54K3	R: 2 x DX-BR002-102K4	DX-BR006-33K3	R: 2 x DX-BR002-54K3	R: 2 x DX-BR002-102K4
3.3	DX-BR006-33K3	R: 2 x DX-BR002-54K3	R: 2 x DX-BR002-102K4	DX-BR006-33K3	R: 2 x DX-BR002-54K3	R: 2 x DX-BR002-102K4
100	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K6	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K1
100	DX-BR100-1K1	DX-BR100-1K6	DX-BR100-6K2	DX-BR100-600	DX-BR100-1K1	DX-BR100-1K6
100	DX-BR100-1K1	DX-BR100-6K2	DX-BR100-6K2	DX-BR100-1K1	DX-BR100-1K6	DX-BR100-6K2
30	DX-BR040-3K1	DX-BR040-3K1	DX-BR040-5K1	DX-BR035-1K1	DX-BR040-3K1	DX-BR040-5K1
30	DX-BR040-3K1	DX-BR040-5K1	DX-BR047-9K2	DX-BR040-3K1	DX-BR040-3K1	DX-BR040-5K1
30	DX-BR040-3K1	DX-BR040-5K1	DX-BR047-9K2	DX-BR040-3K1	DX-BR040-5K1	DX-BR047-9K2
18	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2	DX-BR022-5K1	DX-BR022-5K1	DX-BR022-9K2
18	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2
18	DX-BR022-9K2	P: 2 x DX-BR050-5K1	P: 2 x DX-BR047-9K2	DX-BR022-5K1	DX-BR022-9K2	P: 2 x DX-BR047-9K2
9	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR047-9K2	DX-BR012-9K2	DX-BR012-18K1	DX-BR012-18K1
9	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR047-9K2	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR047-9K2
9	DX-BR012-18K1	P: 2 x DX-BR022-9K2	R: 2 x DX-BR006-33K3	DX-BR012-9K2	DX-BR012-18K1	P: 3 x DX-BR047-9K2
7	DX-BR012-18K1	P: 3 x DX-BR022-9K2	R: 4 x DX-BR002-54K3	DX-BR012-18K1	P: 2 x DX-BR022-9K2	R: 2 x DX-BR006-33K3
7	DX-BR012-18K1	R: 2 x DX-BR006-33K3	R: 4 x DX-BR002-54K3	DX-BR012-18K1	P: 3 x DX-BR047-9K2	R: 4 x DX-BR002-54K3
7	P: 3 x DX-BR022-9K2	R: 4 x DX-BR002-54K3	R: 4 x DX-BR002-102K4	DX-BR012-18K1	R: 2 x DX-BR006-33K3	R: 4 x DX-BR002-54K3
2.5	DX-BR006-33K3	P: 2 x DX-BR006-33K3	R: 2 x DX-BR002-102K4	DX-BR006-33K3	P: 2 x DX-BR006-33K3	P: 2 x DX-BR006-33K3
2.5	P: 2 x DX-BR006-18K1	P: 2 x DX-BR006-33K3	on request	DX-BR006-33K3	P: 2 x DX-BR006-33K3	R: 2 x DX-BR002-102K4

Notes R: = mount in series
P: = mount in parallel

2.7

DX1 variable frequency drives up to 160 kW

Assigned switching and protective elements for DX1

Model code	RCD type @ 110 %	RCD type @ 150 %	optional mains contactor @ 110 %	optional mains contactor @ 150 %	External EMC filter @ 110 %	External EMC filter @ 150 %	External EMC filter (low leakage current) @ 110 %	External EMC filter (low leakage current) @ 150 %
230 V AC, three-phase/230 V AC, three-phase								
DX1-323D7...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L
DX1-324D8...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L
DX1-326D6...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L
DX1-327D8...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-008	DX-EMC34-016-L	DX-EMC34-008-L
DX1-32011...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016	DX-EMC34-016-L	DX-EMC34-016-L
DX1-32012...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-030	DX-EMC34-016	DX-EMC34-030-L	DX-EMC34-016-L
DX1-32017...	FRCdM-40/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM17-10(RDC24)	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030	DX-EMC34-030-L	DX-EMC34-030-L
DX1-32025...	FRCdM-40/4/003-G/Bfq	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030	DX-EMC34-030-L	DX-EMC34-030-L
DX1-32031...	FRCdM-63/4/003-G/Bfq	FRCdM-63/4/003-G/Bfq	DILM40(RDC24)	DILM40(RDC24)	DX-EMC34-055	DX-EMC34-030	DX-EMC34-055-L	DX-EMC34-030-L
DX1-32048...	FRCdM-63/4/003-G/Bfq		DILM40(RDC24)	DILM50(RDC24)	DX-EMC34-075	DX-EMC34-055	DX-EMC34-075-L	DX-EMC34-055-L
DX1-32061...			DILM50(RDC24)	DILM72(RDC24)	DX-EMC34-075	DX-EMC34-075	DX-EMC34-075-L	DX-EMC34-075-L
DX1-32075...			DILM72(RDC24)	DILM80(RDC24)	DX-EMC34-100	DX-EMC34-075	DX-EMC34-100-L	DX-EMC34-075-L
DX1-32088...			DILM80(RDC24)	DILM95(RDC24)	DX-EMC34-100	DX-EMC34-100	DX-EMC34-100-L	DX-EMC34-100-L
DX1-32114...			DILM115(RDC24)	DILM115(RDC24)	DX-EMC34-130	DX-EMC34-130	DX-EMC34-130-L	DX-EMC34-130-L
DX1-32143...			DILM150(RDC24)	DILM170(RDC24)	DX-EMC34-180	DX-EMC34-180	DX-EMC34-180-L	DX-EMC34-180-L
DX1-32170...			DILM170(RDC24)	DILM185A/22(RAC240)	DX-EMC34-250	DX-EMC34-180	DX-EMC34-250-L	DX-EMC34-180-L
DX1-32211...			DILM185A/22(RAC240)	DILM225A/22(RAC240)	DX-EMC34-250	DX-EMC34-250	DX-EMC34-250-L	DX-EMC34-250-L
DX1-32248...			DILM250/22(RA250)	DILM250/22(RA250)	DX-EMC34-400	DX-EMC34-250	DX-EMC34-400-L	DX-EMC34-250-L
400 V AC, three-phase/400 V AC, three-phase								
DX1-342D2...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L
DX1-343D3...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L
DX1-344D3...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L
DX1-345D6...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-008	DX-EMC34-008	DX-EMC34-008-L	DX-EMC34-008-L
DX1-347D6...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-008	DX-EMC34-016-L	DX-EMC34-008-L
DX1-349D0...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016	DX-EMC34-016-L	DX-EMC34-016-L
DX1-34012...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM7-10(24VDC)	DILM7-10(24VDC)	DX-EMC34-016	DX-EMC34-016	DX-EMC34-016-L	DX-EMC34-016-L
DX1-34016...	FRCdM-25/4/003-G/Bfq	FRCdM-25/4/003-G/Bfq	DILM17-10(RDC24)	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-016	DX-EMC34-030-L	DX-EMC34-016-L
DX1-34023...	FRCdM-40/4/003-G/Bfq	FRCdM-40/4/003-G/Bfq	DILM17-10(RDC24)	DILM17-10(RDC24)	DX-EMC34-030	DX-EMC34-030	DX-EMC34-030-L	DX-EMC34-030-L
DX1-34031...	FRCdM-40/4/003-G/Bfq	FRCdM-63/4/003-G/Bfq	DILM17-10(RDC24)	DILM40(RDC24)	DX-EMC34-042	DX-EMC34-030	DX-EMC34-042-L	DX-EMC34-030-L
DX1-34038...	FRCdM-63/4/003-G/Bfq	FRCdM-63/4/003-G/Bfq	DILM40(RDC24)	DILM40(RDC24)	DX-EMC34-055	DX-EMC34-030	DX-EMC34-055-L	DX-EMC34-030-L
DX1-34046...	FRCdM-63/4/003-G/Bfq		DILM40(RDC24)	DILM40(RDC24)	DX-EMC34-075	DX-EMC34-055	DX-EMC34-075-L	DX-EMC34-055-L
DX1-34061...			DILM50(RDC24)	DILM72(RDC24)	DX-EMC34-075	DX-EMC34-075	DX-EMC34-075-L	DX-EMC34-075-L
DX1-34072...			DILM72(RDC24)	DILM80(RDC24)	DX-EMC34-100	DX-EMC34-075	DX-EMC34-100-L	DX-EMC34-075-L
DX1-34087...			DILM80(RDC24)	DILM95(RDC24)	DX-EMC34-100	DX-EMC34-100	DX-EMC34-100-L	DX-EMC34-100-L
DX1-34105...			DILM115(RDC24)	DILM115(RDC24)	DX-EMC34-130	DX-EMC34-130	DX-EMC34-130-L	DX-EMC34-130-L
DX1-34140...			DILM150(RDC24)	DILM170(RDC24)	DX-EMC34-180	DX-EMC34-180	DX-EMC34-180-L	DX-EMC34-180-L
DX1-34170...			DILM170(RDC24)	DILM185A/22(RAC240)	DX-EMC34-250	DX-EMC34-180	DX-EMC34-250-L	DX-EMC34-180-L
DX1-34205...			DILM185A/22(RAC240)	DILM225A/22(RAC240)	DX-EMC34-250	DX-EMC34-250	DX-EMC34-250-L	DX-EMC34-250-L
DX1-34245...			DILM250/22(RA250)	DILM250/22(RA250)	DX-EMC34-400	DX-EMC34-250	DX-EMC34-400-L	DX-EMC34-250-L
575 V AC, three-phase/575 V AC, three-phase								
DX1-353D3...			DILM7-10(24VDC)	DILM7-10(24VDC)				
DX1-354D5...			DILM7-10(24VDC)	DILM7-10(24VDC)				
DX1-357D5...			DILM7-10(24VDC)	DILM7-10(24VDC)				
DX1-35010...			DILM7-10(24VDC)	DILM7-10(24VDC)				
DX1-35013...			DILM7-10(24VDC)	DILM7-10(24VDC)				
DX1-35018...			DILM17-10(RDC24)	DILM17-10(RDC24)				
DX1-35022...			DILM17-10(RDC24)	DILM17-10(RDC24)				
DX1-35027...			DILM17-10(RDC24)	DILM17-10(RDC24)				
DX1-35034...			DILM40(RDC24)	DILM40(RDC24)				
DX1-35041...			DILM40(RDC24)	DILM40(RDC24)				
DX1-35052...			DILM40(RDC24)	DILM50(RDC24)				
DX1-35062...			DILM72(RDC24)	DILM72(RDC24)				
DX1-35080...			DILM80(RDC24)	DILM95(RDC24)				
DX1-35100...			DILM95(RDC24)	DILM115(RDC24)				
DX1-35125...			DILM115(RDC24)	DILM150(RDC24)				
DX1-35144...			DILM170(RDC24)	DILM170(RDC24)				
DX1-35208...			DILM185A/22(RAC240)	DILM225A/22(RAC240)				

DX1 variable frequency drives up to 160 kW

2.7

Assigned switching and protective elements for DX1

passive harmonic filter @ 110 % passive harmonic filter @ 150 % Motor choke @ 110 % Motor choke @ 150 % Sine filter @ 110 % Sine filter @ 150 % All-pole sine filter @ 110 % All-pole sine filter @ 150 %

DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-004	DX-SIN3-006-A	DX-SIN3-004-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-006-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DX-PHF34-019	DX-PHF34-010	DX-LM3-011	DX-LM3-008	DX-SIN3-016	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DX-PHF34-019	DX-PHF34-019	DX-LM3-016	DX-LM3-011	DX-SIN3-016	DX-SIN3-016	DX-SIN3-013-A	DX-SIN3-013-A
DX-PHF34-019	DX-PHF34-019	DX-LM3-035	DX-LM3-016	DX-SIN3-023	DX-SIN3-016	DX-SIN3-024-A	DX-SIN3-013-A
DX-PHF34-026	DX-PHF34-019	DX-LM3-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-023	DX-SIN3-046-A	DX-SIN3-024-A
DX-PHF34-035	DX-PHF34-026	DX-LM3-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-032	DX-SIN3-046-A	DX-SIN3-046-A
DX-PHF34-073	DX-PHF34-035	DX-LM3-050	DX-LM3-035	DX-SIN3-048	DX-SIN3-032	DX-SIN3-065-A	DX-SIN3-046-A
DX-PHF34-073	DX-PHF34-073	DX-LM3-063	DX-LM3-050	DX-SIN3-061	DX-SIN3-048	DX-SIN3-065-A	DX-SIN3-065-A
DX-PHF34-073	DX-PHF34-073	DX-LM3-080	DX-LM3-063	DX-SIN3-090	DX-SIN3-061	DX-SIN3-110-A	DX-SIN3-065-A
DX-PHF34-102	DX-PHF34-073	DX-LM3-100	DX-LM3-080	DX-SIN3-090	DX-SIN3-090	DX-SIN3-110-A	DX-SIN3-110-A
DX-PHF34-102	DX-PHF34-102	DX-LM3-150	DX-LM3-100	DX-SIN3-115	DX-SIN3-090	P: 2 x DX-SIN3-065-A	DX-SIN3-110-A
DX-PHF34-144	DX-PHF34-144	DX-LM3-150	DX-LM3-150	DX-SIN3-150	DX-SIN3-115	P: 2 x DX-SIN3-110-A	P: 2 x DX-SIN3-065-A
DX-PHF34-180	DX-PHF34-144	DX-LM3-180	DX-LM3-150	DX-SIN3-180	DX-SIN3-150	P: 2 x DX-SIN3-110-A	P: 2 x DX-SIN3-110-A
DX-PHF34-217	DX-PHF34-180	DX-LM3-220	DX-LM3-180	DX-SIN3-250	DX-SIN3-180		P: 2 x DX-SIN3-110-A
DX-PHF34-289	DX-PHF34-217	DX-LM3-303	DX-LM3-220	DX-SIN3-480	DX-SIN3-250		
DX-PHF34-325	DX-PHF34-289	DX-LM3-370	DX-LM3-260	DX-SIN3-480	DX-SIN3-250		

DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-004	DX-SIN3-004	DX-SIN3-004-A	DX-SIN3-2D5-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-004	DX-SIN3-006-A	DX-SIN3-004-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-006-A	DX-SIN3-006-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-008	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-006-A
DX-PHF34-010	DX-PHF34-010	DX-LM3-011	DX-LM3-008	DX-SIN3-010	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DX-PHF34-019	DX-PHF34-010	DX-LM3-016	DX-LM3-011	DX-SIN3-016	DX-SIN3-010	DX-SIN3-013-A	DX-SIN3-013-A
DX-PHF34-019	DX-PHF34-019	DX-LM3-016	DX-LM3-016	DX-SIN3-016	DX-SIN3-016	DX-SIN3-024-A	DX-SIN3-013-A
DX-PHF34-026	DX-PHF34-019	DX-LM3-035	DX-LM3-016	DX-SIN3-023	DX-SIN3-016	DX-SIN3-024-A	DX-SIN3-024-A
DX-PHF34-035	DX-PHF34-026	DX-LM3-035	DX-LM3-035	DX-SIN3-032	DX-SIN3-023	DX-SIN3-046-A	DX-SIN3-024-A
DX-PHF34-044	DX-PHF34-035	DX-LM3-050	DX-LM3-035	DX-SIN3-048	DX-SIN3-032	DX-SIN3-046-A	DX-SIN3-046-A
DX-PHF34-044	DX-PHF34-044	DX-LM3-050	DX-LM3-050	DX-SIN3-048	DX-SIN3-048	DX-SIN3-046-A	DX-SIN3-046-A
DX-PHF34-073	DX-PHF34-044	DX-LM3-063	DX-LM3-050	DX-SIN3-061	DX-SIN3-048	DX-SIN3-065-A	DX-SIN3-046-A
DX-PHF34-073	DX-PHF34-073	DX-LM3-080	DX-LM3-063	DX-SIN3-072	DX-SIN3-061	DX-SIN3-110-A	DX-SIN3-065-A
DX-PHF34-102	DX-PHF34-073	DX-LM3-100	DX-LM3-080	DX-SIN3-090	DX-SIN3-072	DX-SIN3-110-A	DX-SIN3-110-A
DX-PHF34-102	DX-PHF34-102	DX-LM3-150	DX-LM3-100	DX-SIN3-115	DX-SIN3-090	DX-SIN3-110-A	DX-SIN3-110-A
DX-PHF34-144	DX-PHF34-102	DX-LM3-150	DX-LM3-150	DX-SIN3-150	DX-SIN3-115	P: 2 x DX-SIN3-110-A	DX-SIN3-110-A
DX-PHF34-180	DX-PHF34-144	DX-LM3-180	DX-LM3-150	DX-SIN3-180	DX-SIN3-150	P: 2 x DX-SIN3-110-A	P: 2 x DX-SIN3-110-A
DX-PHF34-217	DX-PHF34-180	DX-LM3-220	DX-LM3-180	DX-SIN3-250	DX-SIN3-180		P: 2 x DX-SIN3-110-A
DX-PHF34-289	DX-PHF34-217	DX-LM3-303	DX-LM3-220	DX-SIN3-480	DX-SIN3-250		
DX-PHF34-325	DX-PHF34-289	DX-LM3-370	DX-LM3-260	DX-SIN3-480	DX-SIN3-250		

		DX-LM3-008	DX-LM3-008				
		DX-LM3-008	DX-LM3-008				
		DX-LM3-011	DX-LM3-008				
		DX-LM3-016	DX-LM3-011				
		DX-LM3-035	DX-LM3-016				
		DX-LM3-035	DX-LM3-035				
		DX-LM3-035	DX-LM3-035				
		DX-LM3-050	DX-LM3-035				
		DX-LM3-063	DX-LM3-050				
		DX-LM3-063	DX-LM3-063				
		DX-LM3-080	DX-LM3-063				
		DX-LM3-100	DX-LM3-080				
		DX-LM3-180	DX-LM3-100				
		DX-LM3-180	DX-LM3-150				
		DX-LM3-220	DX-LM3-150				
		DX-LM3-260	DX-LM3-220				

DX1

Technical specifications

	Unit	Value
General		
Product standard		IEC/EN 61800-2
Production quality		RoHS, ISO 9001
Safety		IEC/EN 61800-5, IEC/EN 60950-1: SELF
Radio interference		IEC/EN 61800-3
Internal EMC filter		Yes, C2
Radio interference class (EMC)		C1 (with external filter, only conducted emissions), C2, C3; dependent on motor wire length, power and ambient. Eventually external filters (option) required.
Radio interference class (EMC), external filters		optional external EMC filters are required for longer motor wires and use in different EMC environments
Environment (EMC)		1st and 2nd environment according to EN 61800-3
1st environment		Yes
2nd environment		Yes
longest permissible length of motor cable with internal filter		C1 = external Filter C2 ≤ 10 m C3 ≤ 50 m DX1-35... C3 ≤ 10 m
Immunity		EN 61800-3:2004+A1-2012, first and second environment
Emissions		EN 61800-3:2004+A1-2012, Category C2
Electrostatic discharge (ESD)		IEC 61000-4-2, 4 kV Contact, 8 kV Air, Second environment, Criterion B
Fast transients (Burst)		IEC 61000-4-4, 2 kV/5 kHz, Second environment, Criterion B
Dielectrical strength		Primary to secondary: 3600 V AC/5100 V DC Primary to earth: 2000 V AC/2828 V DC
Noise		
Average noise level (cooling fan) sound power level in dB(A)		FR1: 46,4 dB FR2: 60 dB FR3: 64,4 dB FR4: 66,4 dB FR5: 66 dB FR6: 70 dB
Noise level		EN 61800-5-1 (2007)
Climatic proofing		< 95 %, medium relative humidity (RH), non-condensing (EN 50178), non corrosive
Ambient temperature		
Overload 1.1 x I _L (1 min./10 min.)	°C	-30 °C to 40 °C, up to 55 °C with derating 2%/K
Overload 1.5 x I _H (1 min./10 min.)	°C	-30 °C to 50 °C, up to 60 °C with derating 2%/K
T _{min}	°C	-30
T _{max}	°C	60
Ambient conditions		
Ambient according to IEC 60721-3-3		3C2, 3S2
Ambient temperature storage	°C	-40 - +70
Altitude		1000 m, 1000 m up to 2000 m with 1 % / 100 m derating. Up to 4000 m contact Eaton.
Supported networks		TN-S, TN-C, TN-C-S, TT, IT
Mounting positions		vertical
Degree of protection		
DX1-...-C21C		IP21 / NEMA T _{type} 1
DX1-...-C54C		IP54 / NEMA T _{type} 12 (keypad required)
Protection against direct contact		BGV A3 (VBG4, finger- and back-of-hand proof)
Overvoltage category		III
Pollution degree		2
Shock resistance		EN 61800-5-1, EN 60068-2-27 UPS drop test (for applicable UPS weights) Storage and shipping: maximum 15g, 11 ms (in package)
Main circuit		
Rated operational voltage (three phase)		
DX1-32...	V	208 (-10%) - 240 (+10%)
DX1-34...	V	380 (-10%) - 500 (+10%)
DX1-35...	V	500 (-10%) - 600 (+10%)
Tolerance up	%	10
Tolerance down	%	15
Supply frequency	Hz	50/60
Tolerance	%	10
Mains switch-on frequency	Hz	45 - 66
Mains switch-on frequency		Maximum once per 60 seconds

	Symbol	Unit	Value
General			
Overload capability			Overload cycle for 60 s every 600 s
I_L (1 min./10 min.)		%	110
I_H (1 min./10 min.)		%	150
Comment			Rated operational current at an switching frequency of 4 kHz and an ambient air temperature of +50 °C for high overload and +40 °C for low overload
Short time overload capability (2 sec / 20 sec)		%	200
Peak-overload cycle			for 2 seconds all 20 seconds
Output voltage at U_e		V	0 - U_{in}
Integrated DC link choke	u_k	%	5
Rated impulse withstand voltage	U_{imp}	μ s	1.2/50
Rated insulation voltage	U_i	V	0
Control circuit			
External control voltage	U_c	V	24 V DC (max. 250 mA incl. options)
Allowed ripple			0
Reference voltage			
Analog input 1 (voltage)		V DC	0 - 10, 2 - 10, variable - 10
Analog input 2 (voltage)		V DC	0 - 10, 2 - 10, variable - 10, -10 - +10, variable negative to variable positive
Analog input 1 and 2 (current)		mA	0 - 20, 4 - 20, variable - 20
Internal reference voltage			10 V DC (max. 10 mA)
Speed reference setpoint (resolution)			
Analog input		%	0.1% (10 bit), accuracy +1%
Keypad setpoint		Hz	0.01
Frequency reference resolution		Hz	0.01
Inverter functions			
Ramp time			
Acceleration		s	0.1 - 3000
Deceleration		s	0.1 - 3000
Operation mode			V/f control Speed control with Slip compensation sensorless vector control (SLV) Torque control Speed control (CLV)
Inputs / Outputs			
Digital inputs		s	6, programmable, max. 30 V DC
Digital outputs		s	1, programmable, 24 V DC
Analog Inputs		s	2, programmable, 0 - 10 V, 2 - 10 V, - 10 - +10 V, 0/4 - 20 mA
Analog Outputs		s	2, programmable, 0 - 10 V, 0/4 - 20 mA
Relays		s	2, programmable, 2 Form C, 6 A (240 V AC) / 6 A (24 V DC)
Communication			
on-board			Modbus RTU, Modbus TCP, Ethernet/IP
optional			PROFIBUS, PROFINET, Ethernet/IP (dual Port)
SmartWire-DT connection			No
TCP/IP support			Yes
PROFIBUS			Yes
CAN			No
Interbus			No
ASI			No
KNX			No
Modbus			Yes
DataHighway			No
DeviceNet			No
Suconet			No
LON			No
PROFINET IO			Yes
PROFINET CBA			No
Sercos			No
Foundation Fieldbus			No
Ethernet/IP			Yes
ASI-Safety			No
DeviceNet Safety			No
Interbus Safety			No
ProfiSafe			No

2.7


DX1 variable frequency drives up to 160 kW

Technical specifications


Communication	
SafetyBus P	No
BACnet MS/TP	No
BACnet IP	No
others	Yes
Communication, Number of connectors	
Industrial Ethernet	1
PROFIBUS	1
RS232	0
RS422	0
RS485	1
TTY	0
USB	0
parallel	0
others	0
Communication, Number of connectors	
Optical interface	Yes
PC connection	Yes
Option slots	4, out of that 1 for communication
Braking	
Braking torque standard	% 30
DC braking	% adjustable up to 150 %
Braking chopper (internal braking resistor)	-
Braking chopper (external braking resistor)	% 100
Flux brake	Yes
Protection functions	
Overvoltage protection	Yes
Undervoltage protection	Yes
Earth fault protection	Yes
Input phase supervision	Yes
Motor phase supervision	Yes
Overcurrent protection	Yes
Unit overtemperature protection	Yes
Motor overload protection	Yes
Motor stall protection	Yes
Motor underload protection	Yes
DC bus overvoltage control	Yes
Short-circuit protection of 24V reference voltages	Yes
Surge protection	Yes (differential mode 2 kV; common mode 4 kV)
Common coated boards (prevents corrosion)	Yes
	No
RCD protection	RCD Type B (AC/DC sensitive)
Safety functions	STO (Safe Torque Off, SIL3, PLe Cat.4)
Real time clock	Yes
Pluggable terminals	Yes
Keypad	multi line LCD keypad, removable, remote usable
Display	Yes
Keypad	Yes
Frequency inverter princip	Frequency inverter with DC link, internal choke and IGBT-rectifier
Type of inverter	V-Inverter
Use for	for normal internally and externally ventilated 4 pole, three-phase asynchronous motors with 1500 rpm at 50 Hz or 1800 rpm at 60 Hz
4-quadrant mode	
possible	Yes
with power back to the supply	No

Dimension and Weights


Frame size FR1

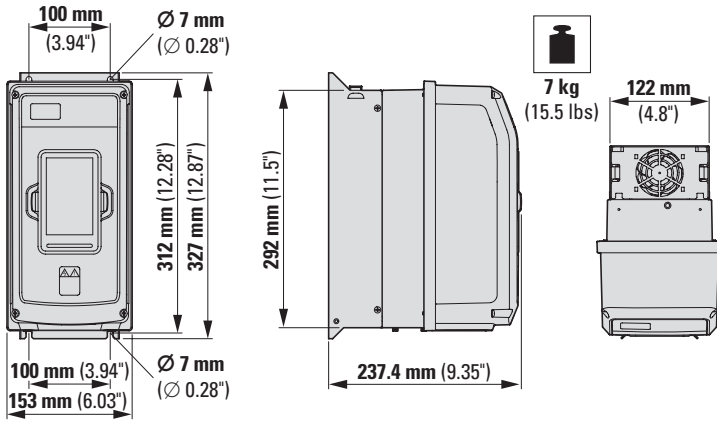

Frame size FR2

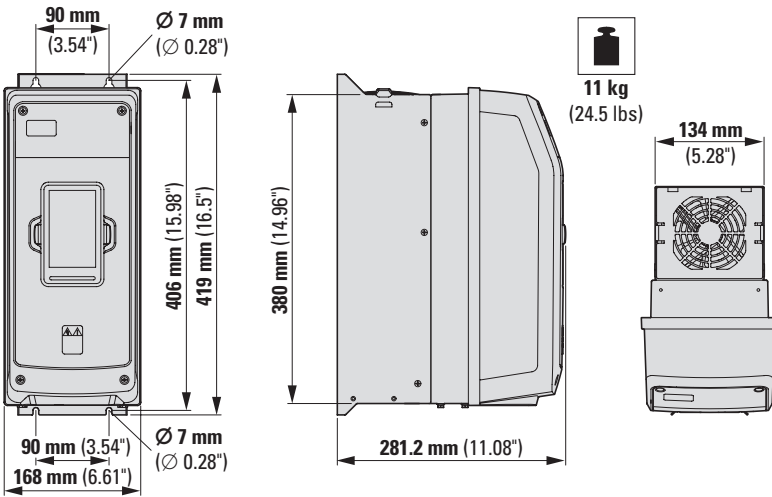

Frame size FR3

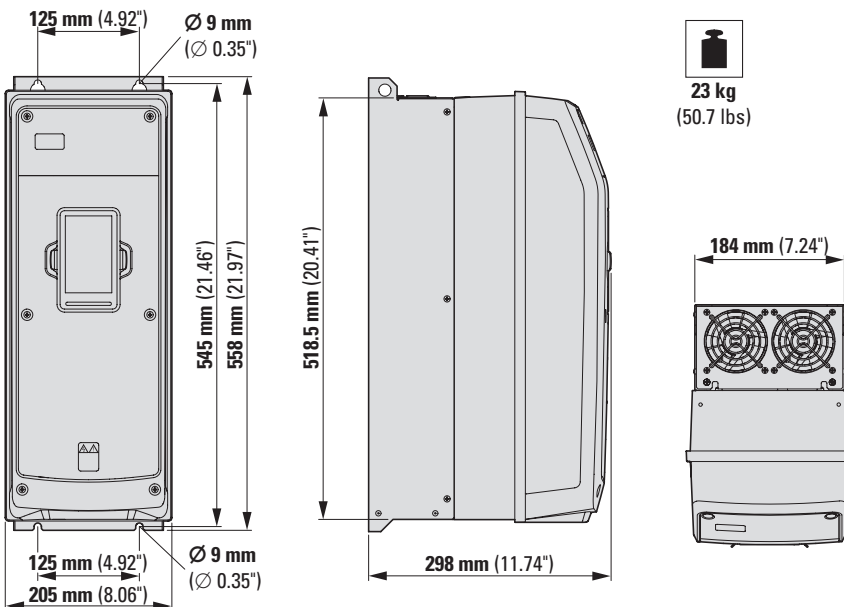


2.7


DX1 variable frequency drives up to 160 kW

Dimension and Weights

Frame size FR4

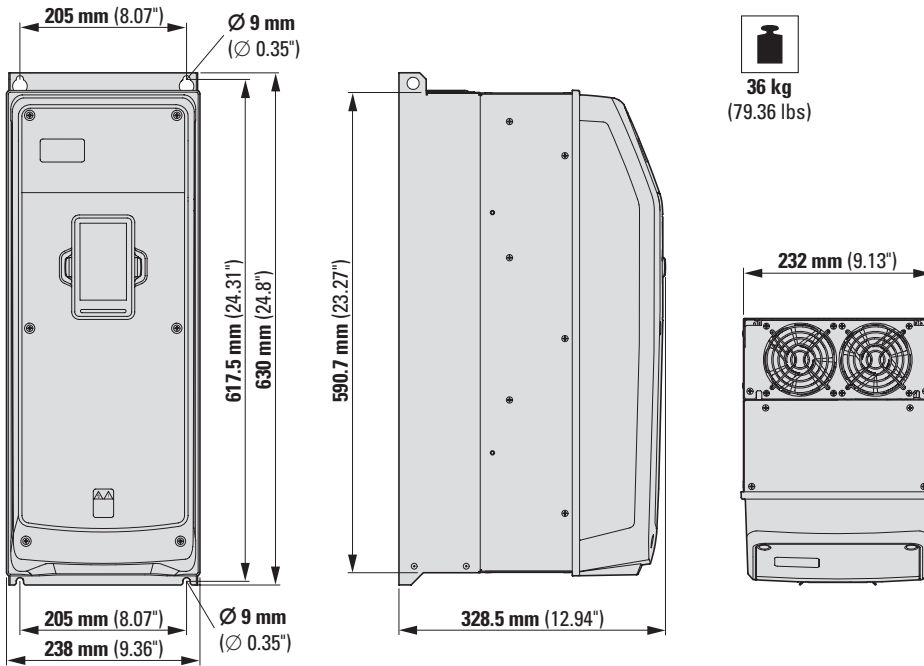


Frame size FR5

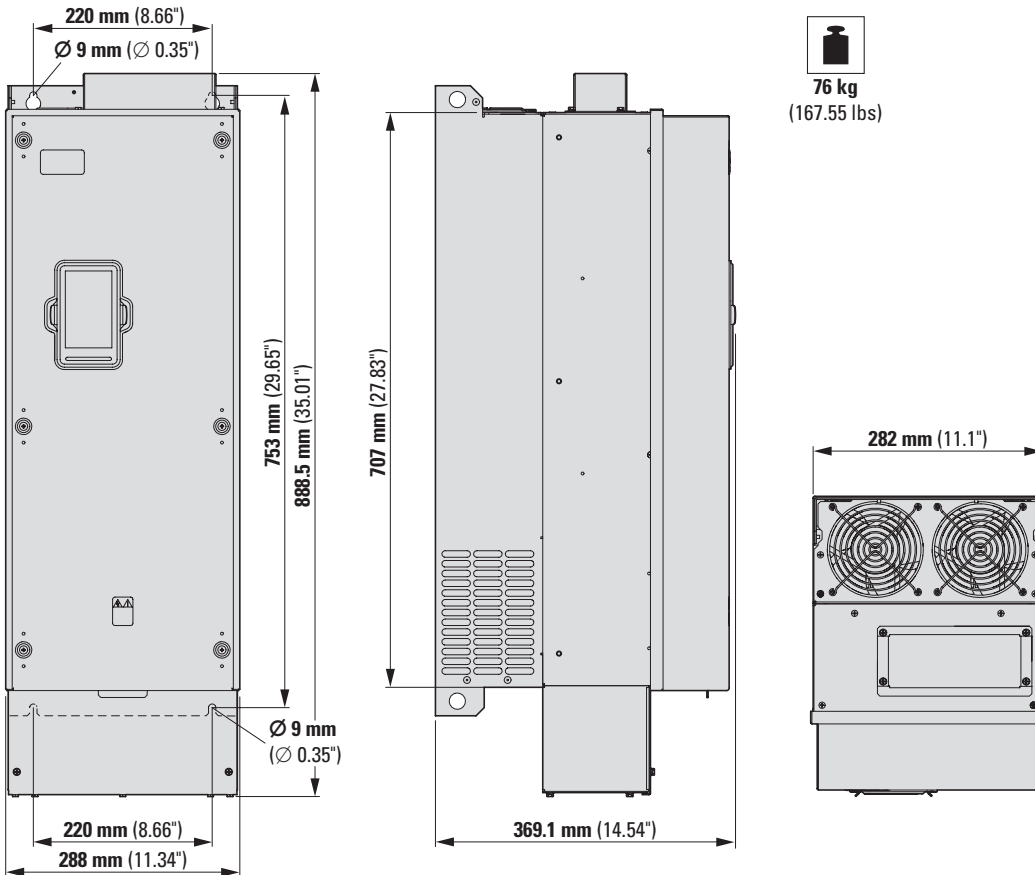

DX1

Frame size FR6

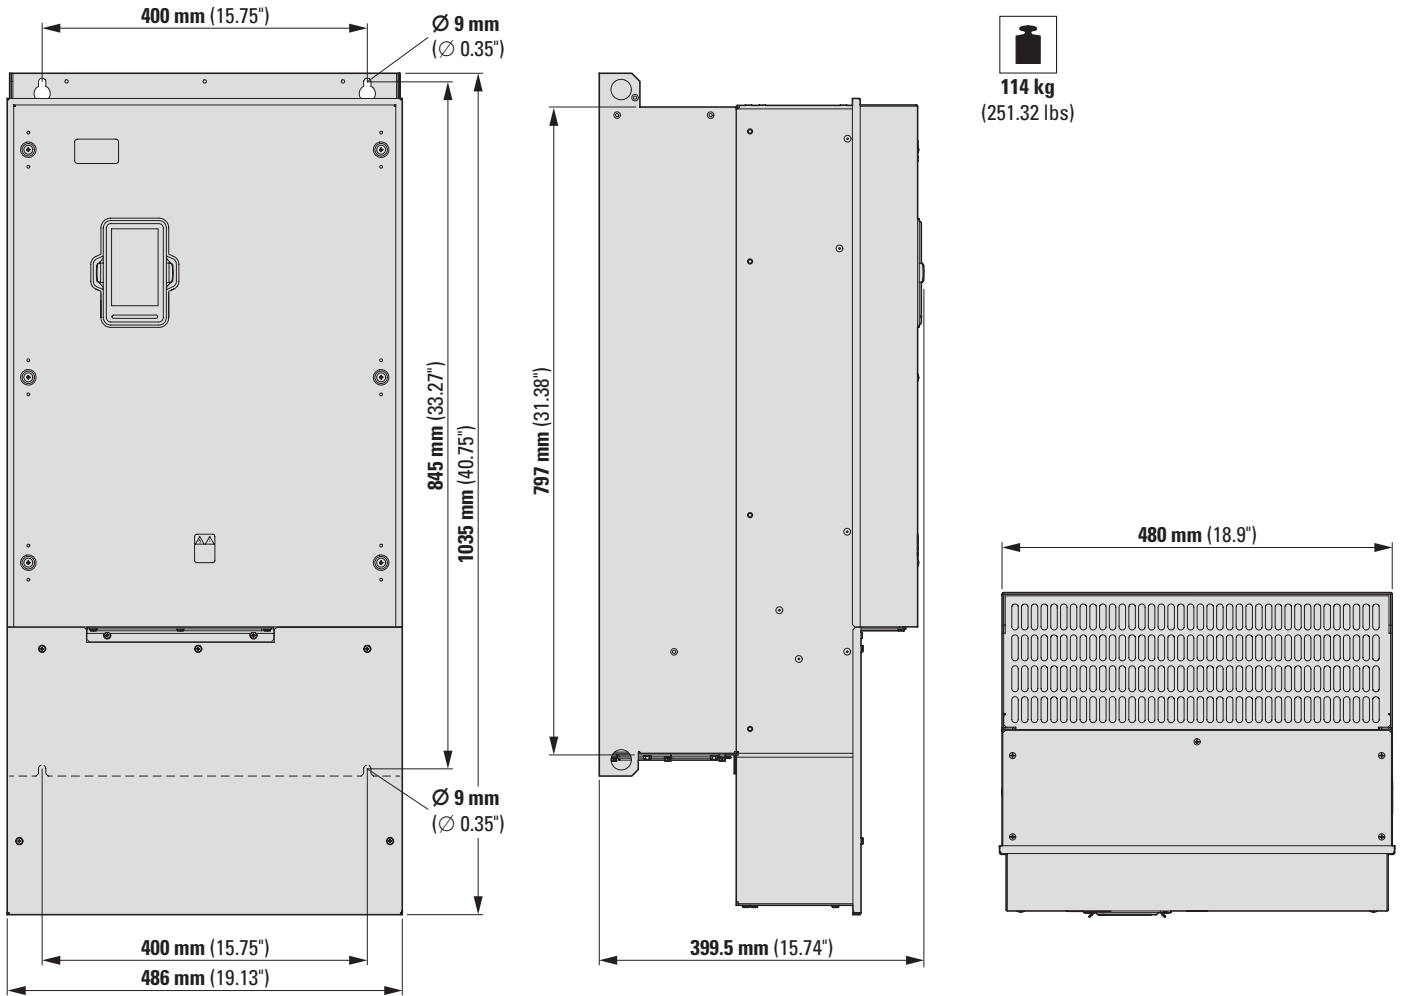



General accessories and engineering

With PowerXL variable speed starters and PowerXL variable frequency drives, you can rest assured knowing that your variable-speed power drive system (PDS) needs will be well taken care of. These units are known for their compact design and wide applicability, making them the ideal choice for most applications on the global market.

Additional options such as mains chokes, motor chokes, sine filters, and braking resistances make it possible not only to expand the devices' range of applications, but also to adapt to a variety of EMC environments and mains-side operating conditions.

Description

The voltage drop at the chokes and filters must be taken into account in the design. A voltage drop of 5% can be assumed across the board for all devices. For detailed specifications for specific cases, please contact Eaton.

DX-LN... mains chokes

DX-LN1...: single-phase, max. 260 V, 50/60 Hz, 6 - 32 A
 DX-LN3...: three-phase, max. 550 V, 50/60 Hz, 4 - 450 A

DX-PHF... passive harmonic filters

- three-phase, 0 - 520 V, 0 - 150 Hz, 10 - 433 A
- the THDi for the typical operating range can be reduced to less than 8% with a harmonic filter. The value will drop as low as 5% above speeds of 50%.

DX-EMC... EMC filters

Leakage current: normal filters: 20 - 37 mA; low leakage current: < 7 mA; super low leakage current: < 3 mA (230 V) or < 0.4 mA (400 V). With lower leakage currents, the usable motor cable length is reduced. For detailed specifications for specific cases, please contact Eaton.

DX-EMC12...: single-phase, 8 - 55 A
 DX-EMC12...-SL: single-phase, 4 - 55 A, super low leakage current
 DX-EMC34...: three-phase, 8 - 750 A
 DX-EMC34...-L: three-phase, 8 - 750 A, low leakage current
 DX-EMC34...-SL: three-phase, 8 - 250 A, super low leakage current
 DX-EMC44...-L: 4-pole, 8 - 250 A, low leakage current with filtered neutral conductor

DX-LM3... motor chokes

DX-LM3...: three-phase, max. 750 V, 0 - 400 Hz, 5 - 450 A

DX-SIN3... sine filters

DX-SIN3...: three-phase, 0 - 520 V, 0 - 150 Hz, 4 - 480 A
 Sine filters used with variable frequency drives require the frequency to be set to a fixed value within a range of 4 - 8 kHz.

DX-SIN3...-A all-pole sine filters

DX-SIN3...: three-phase, 0 - 520 V, 0 - 150 Hz, 1.3 - 110 A
 Sine filters used with variable frequency drives require the frequency to be set to a fixed value within a range of 4 - 8 kHz. With all-pole filters, the maximum cable length for variable frequency drives is limited exclusively by the voltage drop on the cable.

DX-BR... braking resistances

- with prefabricated connection cables for installation in DA1, DC1
- with 1-m long connection cable, temperature monitoring switch, 75 - 400 Ω, 0.4 - 1.6 kW
- with temperature monitoring switch, 2 - 100 Ω, 0.2 - 102.4 kW

HC... harmonic correction unit

HC...C5N1W: wall mounted, three-phase, 208-480 V, 50-125 A, 45-65 Hz, IP21
 HC...C5N2: floor mounted, three-phase, 208-480 V, 125-375 A, 45-65 Hz, IP32
 HC...C5N12: floor mounted, three-phase, 208-480 V, 125-375 A, 45-65 Hz, IP54

- Fully customizable harmonic single and group compensation
- Certified by IEEE, ABS, CCC, CE, UL, DNV, and Lloyd's Register


For more information, visit:
Eaton.com/drives-accessories



2.7 General accessories

Description	252
Ordering	254
Mains chokes	254
Passive harmonic filters / EMC filters	255
EMC filters	256
Motor chokes	258
Sine filters	259
All-pole sine filters	260
Braking resistances	261
Harmonic correction units	264
Engineering	266
Components of the Power Drives System (PDS)	266
General information on engineering	267
Connection example for DM1	269

Example applications

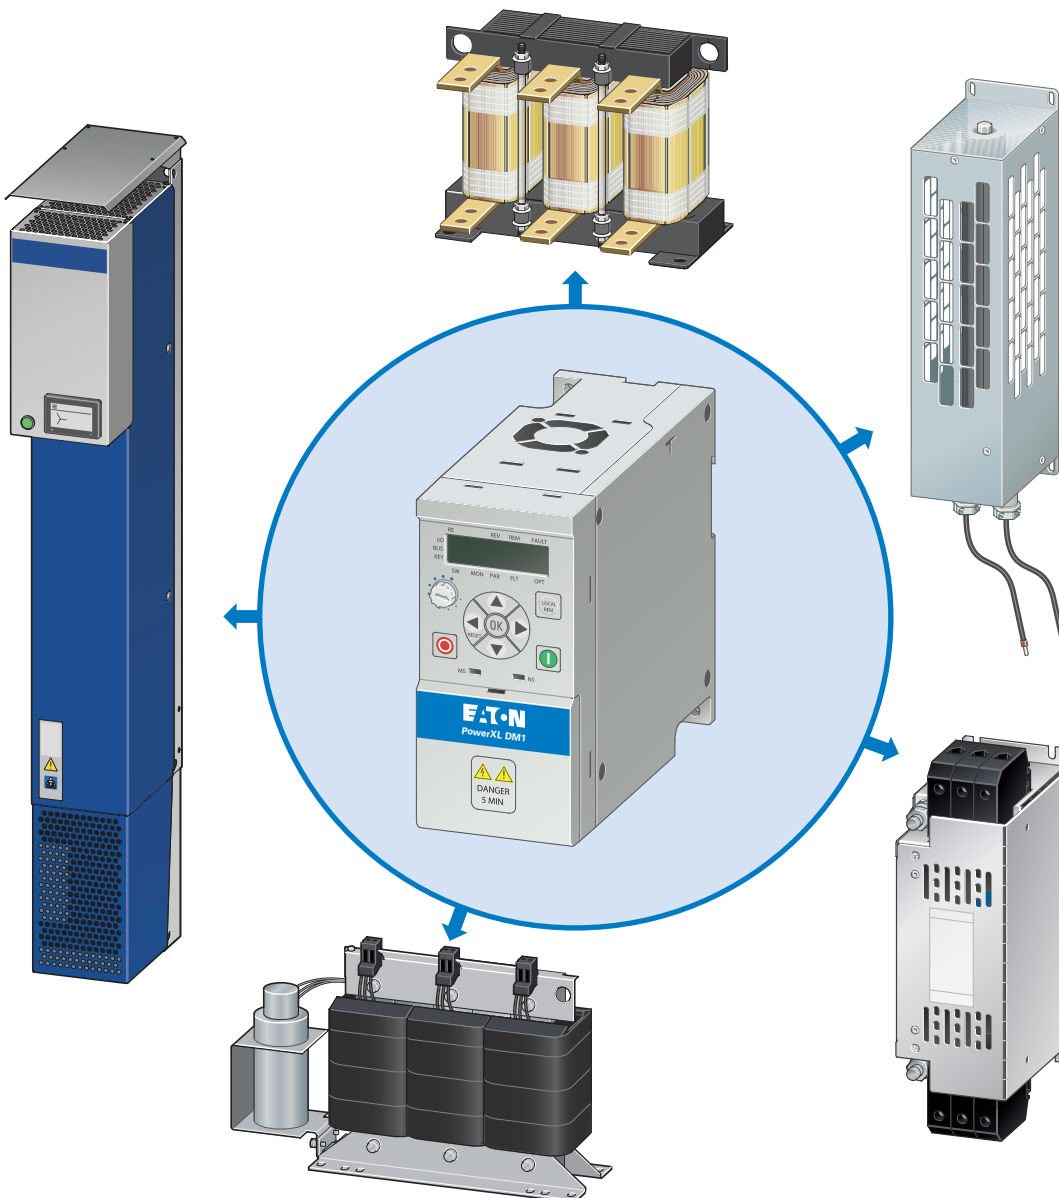

General accessories

2.7

General accessories


Mains chokes

Ordering

Rated operational current	Reactor	Max. heat dissipation	For use with	Model code Catalog number	Std. pack
I_e	L	P_v			
A	mH	W			

Mains choke


Ambient air temperature: +40 °C, max. 70 °C with derating



single-phase

max. permissible connection voltage V AC: 260 V + 0% (50/60 Hz)


5.8	5.05	9	DE1, DC1, DM1	DX-LN1-006 269490	1 unit
8.6	3.41	11	DE1, DC1, DM1	DX-LN1-009 269495	
13	2.25	12	DE1, DC1, DA1, DM1	DX-LN1-013 269496	
18	1.63	17	DE1, DC1, DA1, DM1	DX-LN1-018 269497	
24	1.22	20	DE1, DC1, DA1, DM1	DX-LN1-024 269498	
32	0.92	24	DC1, DM1	DX-LN1-032 169791	








three-phase


max. permissible connection voltage V AC: 550 V + 0% (50/60 Hz)

3.9	7.51	17	DE1, DC1, DA1, DM1	DX-LN3-004 269500	1 unit
6	4.9	19	DE1, DC1, DA1, DM1	DX-LN3-006 269501	
10	2.94	33	DE1, DC1, DA1, DM1	DX-LN3-010 269502	
16	1.84	44	DE1, DC1, DA1, DM1	DX-LN3-016 269503	
25	1.18	57	DC1, DA1, DM1	DX-LN3-025 269504	
40	0.64	59	DA1, DM1	DX-LN3-040 269505	
50	0.37	58	DA1	DX-LN3-050 269506	
60	0.31	60	DA1	DX-LN3-060 269507	
80	0.23	86	DA1	DX-LN3-080 269508	
100	0.18	101	DA1	DX-LN3-100 269509	
120	0.15	100	DA1	DX-LN3-120 269510	
160	0.11	140	DA1	DX-LN3-160 269511	
200	0.09	154	DA1	DX-LN3-200 269512	
250	0.07	155	DA1	DX-LN3-250 269513	
300	0.06	196	DA1	DX-LN3-300 269514	
303	0.06	230	DA1	DX-LN3-303 169143	
370	0.05	290	DA1	DX-LN3-370 169144	
450	0.04	300	DA1	DX-LN3-450 169145	



400 V passive harmonic filters / EMC filters

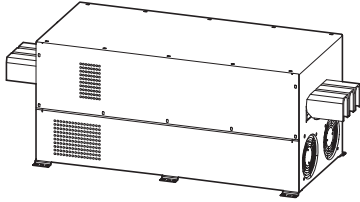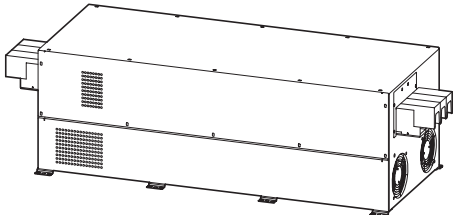



Description	Current	For use with	Model code		Std. pack
			Catalog number		
A					
400 V passive harmonic filters					
	440 V/10 A passive harmonic filters	10	DE1, DC1, DM1, DG1	DX-PHF34-010 EP-400088	1 unit
	440 V/19 A passive harmonic filters	19		DX-PHF34-019 EP-400089	
	440 V/26 A passive harmonic filters	26		DX-PHF34-026 EP-400090	
	440 V/35 A passive harmonic filters	35		DX-PHF34-035 EP-400091	
	440 V/44 A passive harmonic filters	44		DX-PHF34-044 EP-400092	
	440 V/72 A passive harmonic filters	73	DA1, DG1	DX-PHF34-073 EP-400093	
	440 V/102 A passive harmonic filters	102		DX-PHF34-102 EP-400094	
	440 V/144 A passive harmonic filters	144		DX-PHF34-144 EP-400095	
	440 V/180 A passive harmonic filters	180		DX-PHF34-180 EP-400096	
	440 V/217 A passive harmonic filters	217		DX-PHF34-217 EP-400097	
	440 V/289 A passive harmonic filters	289		DX-PHF34-289 EP-400098	
	440 V/325 A passive harmonic filters	325		DX-PHF34-325 EP-400099	
	440 V/370 A passive harmonic filters	370		DX-PHF34-370 EP-400100	
	440 V/433 A passive harmonic filters	433		DX-PHF34-433 EP-400101	

Description	Current	For use with	Model code		Std. pack
			Catalog number		
A					
EMC filter 230 V, 1 pole, leakage current 20 - 60 mA					
	Base mounted EMC filter 250 V/8 A	8	DE1, DE11, DC1, DA1, DG1, DM1	DX-EMC12-008 EP-401619	1 unit
	Base mounted EMC filter 250 V/12 A	12		DX-EMC12-012 EP-401696	
	Base mounted EMC filter 250 V/16 A	16		DX-EMC12-016 EP-401697	
	Base mounted EMC filter 250 V/20 A	20		DX-EMC12-020 EP-401698	
	Base mounted EMC filter 250 V/25 A	25		DX-EMC12-025 EP-401699	
	Base mounted EMC filter 250 V/30 A	30		DX-EMC12-030 EP-401700	
	Base mounted EMC filter 250 V/42 A	42		DX-EMC12-042 EP-401701	
	Base mounted EMC filter 250 V/55 A	55		DX-EMC12-055 EP-401702	

2.7






General accessories

EMC filters

Connection type	Rated operational current	For use with ¹⁾	Protection type	Model code	Std. pack	
	I_e A			Catalog number		
EMC filter 400 V, 3 pole, leakage current 20 – 60 mA						
	Screw terminal, PE stud	8	DE1, DC1, DA1, DG1, DM1	IP20	DX-EMC34-008 184500	1 unit
		16	DE1, DC1, DA1, DG1, DM1		DX-EMC34-016 184501	
		30	DC1, DA1, DG1, DM1		DX-EMC34-030 184502	
		42	DC1, DA1, DG1, DM1		DX-EMC34-042 184503	
		55	DC1, DA1, DG1, DM1		DX-EMC34-055 184504	
		75	DA1, DG1		DX-EMC34-075 184505	
		100	DA1, DG1		DX-EMC34-100 172285	
		130			DX-EMC34-130 172286	
		180			DX-EMC34-180 172287	
		250			DX-EMC34-250 172288	
	Flat copper bar, PE stud	400		IP00	DX-EMC34-400 172289	
		750			DX-EMC34-750 177636	
EMC filter 400 V, 3 pole, low leakage current 6 - 8 mA						
	Screw terminal, PE stud	8	DE1, DC1, DA1, DG1, DM1	IP20	DX-EMC34-008-L 184506	1 unit
		16	DE1, DC1, DA1, DG1, DM1		DX-EMC34-016-L 184507	
		30	DC1, DA1, DG1, DM1		DX-EMC34-030-L 184508	
		42	DC1, DA1, DG1, DM1		DX-EMC34-042-L 184509	
		55	DC1, DA1, DG1, DM1		DX-EMC34-055-L 184510	
		75	DA1, DG1		DX-EMC34-075-L 184511	
		100	DA1, DG1		DX-EMC34-100-L 174611	
		130			DX-EMC34-130-L 174612	
		180			DX-EMC34-180-L 174613	
		250			DX-EMC34-250-L 174614	
	Flat copper bar, PE stud	400	DA1, DG1	IP00	DX-EMC34-400-L 174615	
		750			DX-EMC34-750-L 177637	

Notes

¹⁾ See assigned switching and protective elements for an article-specific selection.

Description	Current A	For use with	Model code Catalog number	Std. pack
EMC filter 230 V, 1 pole, extra low leakage current (< 0.4 mA)				
 Extra low leakage current EMC filter 240V/4A	4	DE1, DC1, DA1, DM1, DG1	DX-EMC12-004-SL EP-400102	1 unit
Extra low leakage current EMC filter 240V/8A	8		DX-EMC12-008-SL EP-400103	
Extra low leakage current EMC filter 240V/12A	12		DX-EMC12-012-SL EP-400104	
Extra low leakage current EMC filter 240V/16A	16		DX-EMC12-016-SL EP-400105	
Extra low leakage current EMC filter 240V/20A	20		DX-EMC12-020-SL EP-400106	
Extra low leakage current EMC filter 240V/25A	25		DX-EMC12-025-SL EP-400107	
Extra low leakage current EMC filter 240V/30A	30		DX-EMC12-030-SL EP-400108	
Extra low leakage current EMC filter 240V/42A	42		DX-EMC12-042-SL EP-400109	
Extra low leakage current EMC filter 240V/55A	55		DX-EMC12-055-SL EP-400110	
EMC filter 400 V, 3 pole, extra low leakage current (< 0.4 mA)				
 Extra low leakage current EMC filter 440V/8A	8	DE1, DC1, DA1, DM1, DG1	DX-EMC34-008-SL EP-400111	1 unit
Extra low leakage current EMC filter 440V/12A	12		DX-EMC34-012-SL EP-400112	
Extra low leakage current EMC filter 440V/16A	16		DX-EMC34-016-SL EP-400113	
Extra low leakage current EMC filter 440V/30A	30		DX-EMC34-030-SL EP-400114	
Extra low leakage current EMC filter 440V/42A	42		DX-EMC34-042-SL EP-400115	
Extra low leakage current EMC filter 440V/55A	55		DX-EMC34-055-SL EP-400116	
 Extra low leakage current EMC filter 440V/75A	75	DA1, DG1	DX-EMC34-075-SL EP-400117	
Extra low leakage current EMC filter 440V/100A	100		DX-EMC34-100-SL EP-400118	
Extra low leakage current EMC filter 440V/130A	130		DX-EMC34-130-SL EP-400119	
Extra low leakage current EMC filter 440V/180A	180		DX-EMC34-180-SL EP-400120	
Extra low leakage current EMC filter 440V/250A	250		DX-EMC34-250-SL EP-400121	
EMC filter 400 V, 4 pole, low leakage current 6 - 8 mA				
 Low leakage current EMC filter 440V/8A	8	DE1, DC1, DA1, DM1, DG1	DX-EMC44-008-L EP-400143	1 unit
Low leakage current EMC filter 440V/16A	16		DX-EMC44-016-L EP-400144	
Low leakage current EMC filter 440V/30A	30		DX-EMC44-030-L EP-400145	
Low leakage current EMC filter 440V/42A	42		DX-EMC44-042-L EP-400146	
Low leakage current EMC filter 440V/55A	55		DX-EMC44-055-L EP-400147	
 Low leakage current EMC filter 440V/75A	75	DA1, DG1	DX-EMC44-075-L EP-400148	
Low leakage current EMC filter 440V/100A	100		DX-EMC44-100-L EP-400149	
Low leakage current EMC filter 440V/130A	130		DX-EMC44-130-L EP-400150	
Low leakage current EMC filter 440V/180A	180		DX-EMC44-180-L EP-400151	
Low leakage current EMC filter 440V/250A	250		DX-EMC44-250-L EP-400152	

2.7

General accessories

Motor chokes

Rated operational current	Inductance	Max. heat dissipation	For use with	Model code Catalog number	Std. pack
I_e	L	P_v			
A	mH	W			



Motor choke

Ambient air temperature: +40 °C, max. 70 °C with derating

three-phase

max. permissible connection voltage V AC: 750 V + 0% (0 - 400 Hz)

Max. permissible pulse frequency: $f_{PWM} \leq 12$ kHz (rms)




8	4.1	54	DE1, DC1, DA1, DG1, DM1	DX-LM3-008 269539	1 unit
11	3	71	DE1, DC1, DA1, DG1, DM1	DX-LM3-011 269541	
16	1.5	78	DE1, DC1, DA1, DG1, DM1	DX-LM3-016 269542	
35	1	116	DC1, DA1, DG1, DM1	DX-LM3-035 269543	
50	0.6	168	DA1, DG1, DM1	DX-LM3-050 269544	
63	0.5	193	DA1, DG1	DX-LM3-063 269545	1 unit
80	0.5	206	DA1, DG1	DX-LM3-080 269546	
100	0.45	294	DA1, DG1	DX-LM3-100 269547	
150	0.35	424	DA1, DG1	DX-LM3-150 269548	
180	0.3	439	DA1, DG1	DX-LM3-180 269549	
220	0.2	517	DA1, DG1	DX-LM3-220 269560	
260	0.15	520	DA1, DG1	DX-LM3-260 269561	
303	0.15	–	DA1	DX-LM3-303 169146	
370	0.12	–	DA1	DX-LM3-370 169147	
450	0.1	–	DA1	DX-LM3-450 169148	

Rated operational current	Inductance	Max. heat dissipation	For use with	Model code Catalog number	Std. pack
I_e	L	P_v			
A	mH	W			

Sine filters

Ambient air temperature: +40 °C, max. 50 °C with derating

three-phase
 max. permissible connection voltage V AC: 520 V + 0% (0 - 150 Hz)
 Max. permissible pulse frequency: $f_{PWM} = \text{Constant } 4 - 8 \text{ kHz (rms)}$.








4	11	50	DC1, DA1, DM1, DG1	DX-SIN3-004 271538	1 unit
10	5.1	100		DX-SIN3-010 271590	
16.5	3.07	70		DX-SIN3-016 271591	
23.5	2.5	125		DX-SIN3-023 271593	
32	2	100		DX-SIN3-032 271594	
37	1.7	100		DX-SIN3-037 271595	
48	1.2	240		DX-SIN3-048 271597	
61	1	280	DA1, DG1	DX-SIN3-061 271599	
72	0.95	300		DX-SIN3-072 271600	
90	0.8	290		DX-SIN3-090 271601	
115	0	460		DX-SIN3-115 271602	
150	0.5	530		DX-SIN3-150 271603	
180	0.4	500		DX-SIN3-180 271604	
250	0.35	550		DX-SIN3-250 271605	
480	0.14	1550		DX-SIN3-480 169149	

2.7

General accessories

All-pole sine filters 400 V

Description	Current A	For use with	Model code Catalog number	Std. pack
All-pole sine filters 400 V				
 All-pole sine filters 440V/1.3A	1.3	DC1, DA1, DM1, DG1	DX-SIN3-1D3-A EP-400085	1 unit
All-pole sine filters 440V/2.5A	2.5		DX-SIN3-2D5-A EP-400086	
All-pole sine filters 440V/4A	4		DX-SIN3-004-A EP-400087	
 All-pole sine filters 440V/6A	6		DX-SIN3-006-A 184492	
All-pole sine filters 440V/13A	13		DX-SIN3-013-A 184493	
All-pole sine filters 440V/24A	24		DX-SIN3-024-A 184494	
 All-pole sine filters 440V/46A	46		DX-SIN3-046-A 184495	
 All-pole sine filters 440V/65A	65	DA1, DG1	DX-SIN3-065-A 184496	
 All-pole sine filters 440V/110A	110		DX-SIN3-110-A 197529	

Braking resistances

Resistance value	Continuous braking power	Protection type	For use with ¹⁾	Model code Catalog number	Std. pack
R	PDB				
Ω	kW				

Braking resistances



Wire wound resistor in aluminum case for direct installation in Variable frequency drive enclosure of frame sizes FS2 and FS3. With prefabricated connection cable

100	0.2	IP54	DC1, DA1	DX-BR3-100 169150	1 unit
-----	-----	------	----------	-----------------------------	--------



Wire wound resistor in ceramic potting compound inside aluminum case for direct installation in Variable frequency drive enclosure of frame sizes FS4 and FS5.

33	0.5	IP54	DA1	DX-BR5-033 169151	1 unit
----	-----	------	-----	-----------------------------	--------



Wire wound resistor in ceramic potting compound inside aluminum case with temperature monitoring switch with connection cables (approx. 0.5 m long)

27	0.24	IP65	DC1, DA1, DG1, DM1	DX-BR027-240 174243	1 unit
40	0.2			DX-BR040-200 174242	
47	0.24			DX-BR047-240 174236	
50	0.2			DX-BR050-200 174235	
100	0.1			DX-BR100-100 174241	
100	0.2			DX-BR100-200 174237	
100	0.24			DX-BR100-240 174238	
150	0.2			DX-BR150-200 174248	
210	0.2			DX-BR210-200 174247	
430	0.1			DX-BR430-100 174246	

Notes

¹⁾ See assigned switching and protective elements for an article-specific selection.


2.7

General accessories

Braking resistances


Resistance value	Continuous braking power	Protection type	For use with ¹⁾	Model code Catalog number	Std. pack
R	PDB				
Ω	kW				

Braking resistances




Resistor combination (size 1)
with temperature monitoring switch
with connection terminals

20	0.96	IP20	DC1, DA1, DG1, DM1	DX-BR020-960 174257	1 unit
24	0.4			DX-BR024-400 174244	
24	0.6			DX-BR024-600 174267	
24	0.72			DX-BR024-720 174245	
42	0.72			DX-BR042-720 174266	
50	0.4			DX-BR050-400 174239	
50	0.6			DX-BR050-600 174240	
50	0.96			DX-BR050-960 174250	
75	0.4			DX-BR075-400 174249	
100	0.6			DX-BR100-600 174251	
100	0.72			DX-BR100-720 174252	
150	0.8			DX-BR150-800 174262	
216	0.6			DX-BR216-600 174268	
400	0.4			DX-BR400-400 174261	




Resistor combination (size 2)
with temperature monitoring switch
with connection terminals

25	1.92	IP20	DC1, DA1, DG1, DM1	DX-BR025-1920 174259	1 unit
50	1.44			DX-BR050-1440 174254	
50	1.92			DX-BR050-1920 174255	
84	1.44			DX-BR084-1440 174263	



Wire wound resistor in ceramic potting compound inside aluminum case, combined
Installed in a housing designed to prevent accidental contact and featuring a temperature monitoring
switch and a 1-meter connection cable

75	1.1	IP20	DA1, DG1, DM1	DX-BR075-1K1 171917	1 unit
100	1.1	IP20		DX-BR100-1K1 171896	
100	1.6	IP20		DX-BR100-1K6 171924	
150	1.1	IP20		DX-BR150-1K1 171895	
200	0.8	IP20		DX-BR200-0K8 171894	




Wire wound resistor in ceramic potting compound inside aluminum case, combined
Installed in a housing designed to prevent accidental contact and featuring a temperature monitoring
switch and internal connecting terminals

35	1.1	IP20	DA1, DG1, DM1	DX-BR035-1K1 171927	1 unit
50	0.8	IP20		DX-BR050-0K8 171910	

Notes

¹⁾ See assigned switching and protective elements for an article-specific selection.



Resistance value	Continuous braking power	Protection type	For use with ¹⁾	Model code Catalog number	Std. pack
R	PDB				
Ω	kW				

Braking resistances

Steel grid resistor, combined
Installed in a housing designed to prevent accidental contact and featuring a temperature monitoring switch and internal connection terminals/terminal bolts

2	54.3	IP20	DC1, DA1, DG1, DM1	DX-BR002-54K3 171923	1 unit
	102.4			DX-BR002-102K4 171903	
6	5.1			DX-BR006-5K1 171913	
	9.2			DX-BR006-9K2 171893	
	18.1			DX-BR006-18K1 171922	
	33.3			DX-BR006-33K3 171902	
12	3.1			DX-BR012-3K1 171912	
	5.1			DX-BR012-5K1 171929	
	9.2			DX-BR012-9K2 171921	
	18.1			DX-BR012-18K1 171901	
22	1.4			DX-BR022-1K4 171911	
	3.1			DX-BR022-3K1 171928	
	5.1			DX-BR022-5K1 171920	
	9.2			DX-BR022-9K2 171900	
40	3.1			DX-BR040-3K1 171919	
	5.1			DX-BR040-5K1 171899	
47	3.1			DX-BR047-3K1 171908	
	9.2			DX-BR047-9K2 171905	
50	5.1			DX-BR050-5K1 171898	
75	5.1			DX-BR075-5K1 171897	
100	6.2			DX-BR100-6K2 171904	


Notes ¹⁾ See assigned switching and protective elements for an article-specific selection.

2.7

General accessories



HC harmonic correction units

Functionality

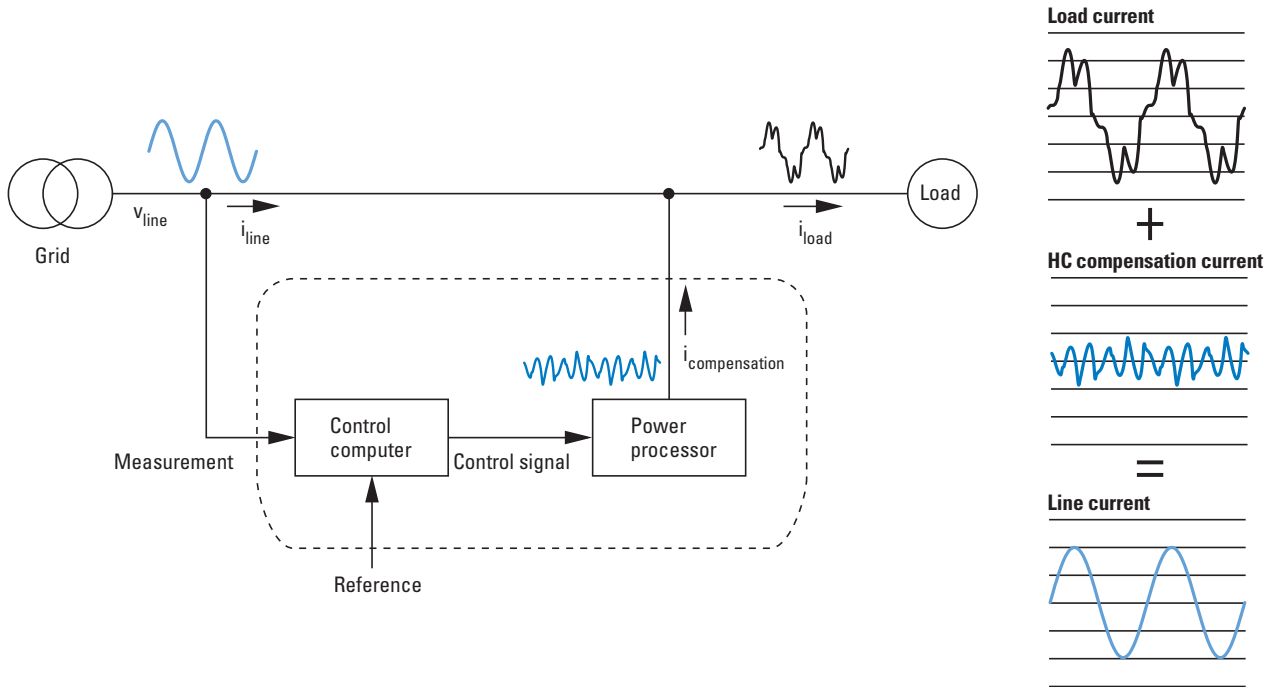

Each HC unit is connected in parallel, or in shunt, with the load that requires compensation. The power flows of electrical currents between the load and the network are measured and analyzed to identify disturbances such as reactive displacement and/or harmonics. If such disturbances are detected, the HC unit injects


compensation currents that are the exact opposite of these disturbances, effectively canceling out the undesirable load behavior. This results in an ideal load with minimal power losses and disturbances, making the energy profile appear ideal to the transformer.

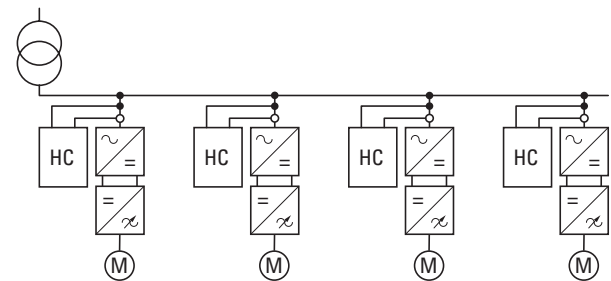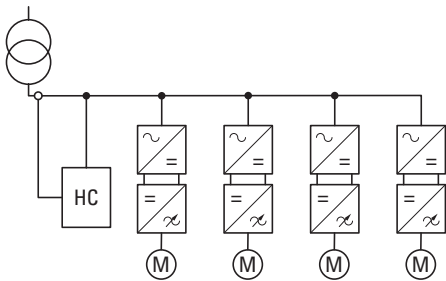

The HC unit is capable of working in single or group compensation. In single compensation, each load has its own dedicated HC unit, providing precise and tailored compensation for optimal performance and power quality. This method ensures that each load's unique disturbances are addressed individually. In group compensation, a single HC unit is connected to multiple loads, compensating for the combined

disturbances of all connected loads simultaneously. This approach is cost-effective and space-saving, though it may not offer the same level of precision as single compensation.

By choosing the appropriate compensation method, users can ensure efficient and effective power quality solutions tailored to their specific needs.

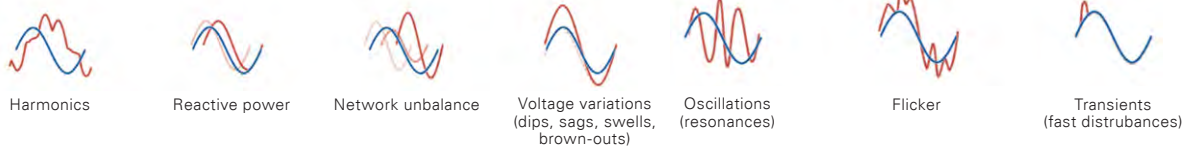

The HC unit with its active harmonic filtering technology effectively addresses all types of electrical disturbances, including harmonics, reactive power, network unbalance, voltage variations, oscillations, flicker, and transients. By

injecting compensation currents that counteract these issues, the HC unit ensures an ideal load with minimal power losses and disturbances, resulting in a stable and efficient energy profile.

General accessories


Rated operational current Protection type **Model code** Std. pack
 Catalog number

I_e
A

Harmonic correction unit, wall-mounted


Ambient air temperature: +40 C, max. 50 C with derating

Rated operational current	Protection type	Model code	Std. pack
HC...C5N1W, three-phase, 208-480 V, 45-65 Hz, wall-mounted			
50	IP21	HC050C5N1W HC050C5N1W	1 unit
75	IP21	HC075C5N1W HC075C5N1W	
100	IP21	HC100C5N1W HC100C5N1W	
125	IP21	HC125C5N1W HC125C5N1W	



Harmonic correction unit, floor-mounted

Rated operational current	Protection type	Model code	Std. pack
HC...C5N2, three-phase, 208-480 V, 45-65 Hz, floor-mounted			
125	IP32	HC125C5N2 HC125C5N2	1 unit
250	IP32	HC250C5N2 HC250C5N2	
375	IP32	HC375C5N2 HC375C5N2	
HC...C5N2S, with seismic option, three-phase, 208-480 V, 45-65 Hz, floor-mounted			
125	IP32	HC125C5N2S HC125C5N2S	1 unit
250	IP32	HC250C5N2S HC250C5N2S	
375	IP32	HC375C5N2S HC375C5N2S	
HC...C5N12, three-phase, 208-480 V, 45-65 Hz, floor-mounted			
125	IP54	HC125C5N12 HC125C5N12	1 unit
250	IP54	HC250C5N12 HC250C5N12	
375	IP54	HC375C5N12 HC375C5N12	

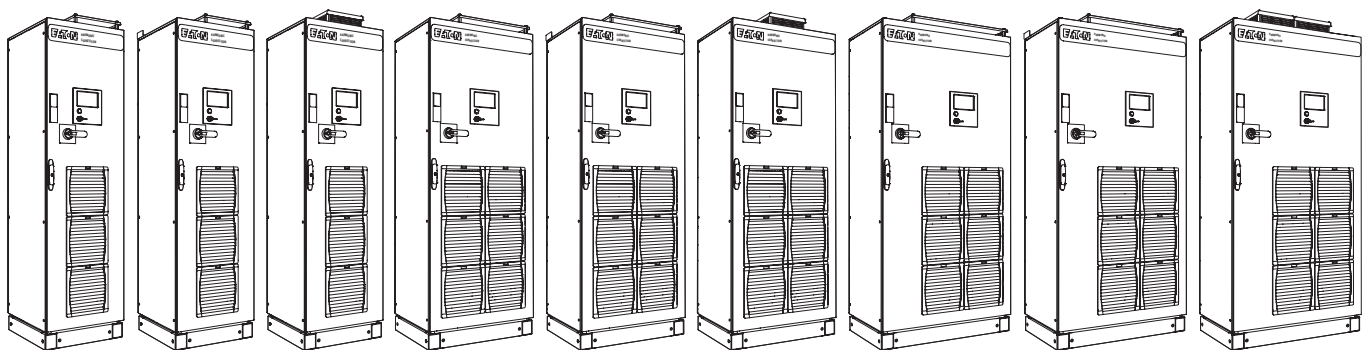


HC125C5N2 HC125C5N2S HC125C5N12 HC250C5N2 HC250C5N2S HC250C5N12 HC375C5N2 HC375C5N2S HC375C5N12

2.7

General accessories

Components of the Power Drives System (PDS)

Engineering

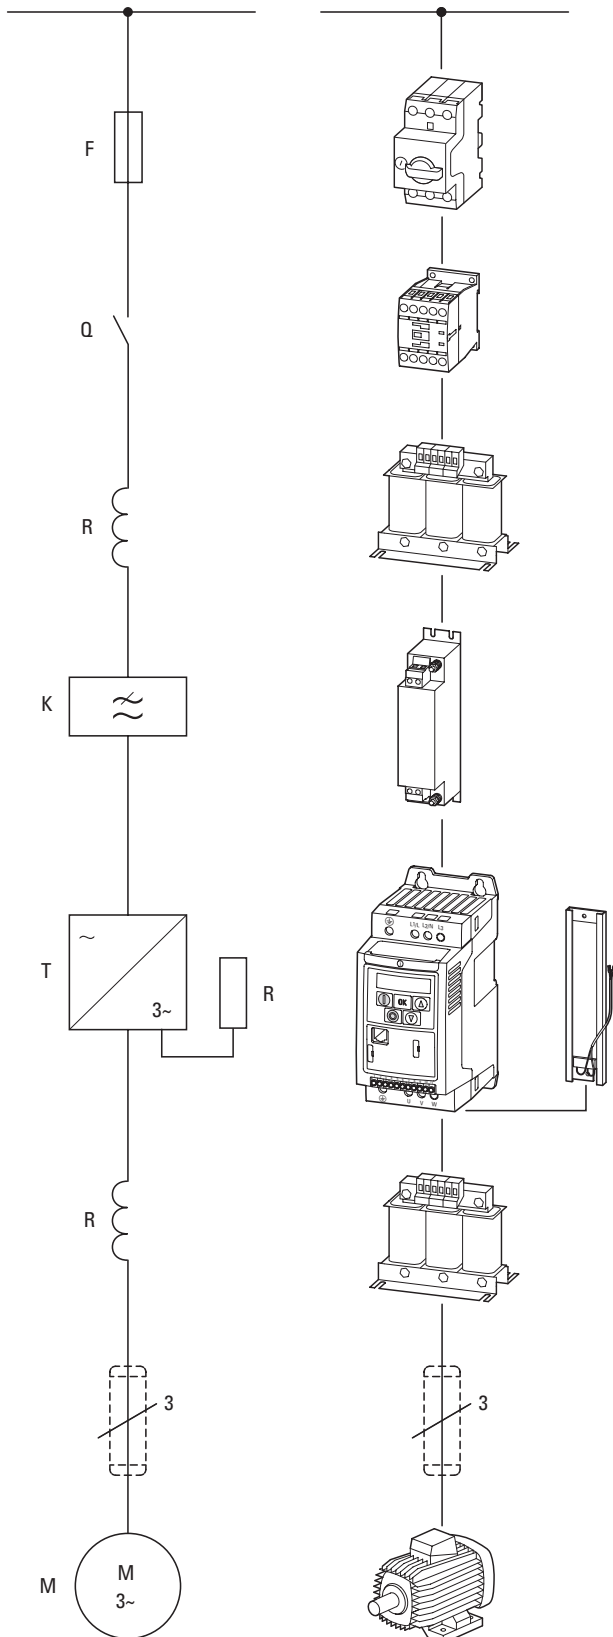

AC supply system: variable-frequency drives can be connected without restriction to AC supply systems with an earthed star point (TN/TT grounding systems). Directly connecting them to and running them on unbalanced or B phase-grounded systems (e.g., USA) is not permissible. Fuses (circuit breakers) enable you to protect wiring and electrical devices and appliances. For personal protection, additional AC/DC sensitive residual current circuit breakers (RCD type B) are required.

Contactors serve to engage and disengage mains voltage.

Mains chokes damp any harmonic distortion (THD) that occurs as well as current spikes and limit inrush currents (the link capacitor's charging current). In addition, they protect the mains rectifier from voltage peaks coming from the supply mains.

Passive harmonic filters reduce harmonic currents (THDi) so that limits required by standards can be met. They protect the connected electrical power network from the effects of line side harmonics and improve the system's interference immunity.

EMC filters damp high-frequency electromagnetic emissions from devices and appliances. They ensure that the EMC limit values for conducted interference specified in the applicable product standards are complied with (variable-frequency drives).

Note: External EMC filters (option) permit longer motor cables and have low leakage currents. Normally, they should only be used with variable frequency drives that do not feature an internal EMC filter.

Exception: directly assigned variable-frequency drives with internal filters (calibrated combination)

Variable frequency drives enable the infinitely variable speed control of three-phase motors. To do this, the variable-frequency drive converts the voltage of the AC supply system with a constant voltage and a constant frequency to a new AC voltage with a variable amplitude and a variable frequency.

A **braking resistance** converts the generator braking energy of the variable frequency drive into heat. The variable frequency drive must be equipped with a brake chopper, which connects the braking resistance parallel to the internal DC link.

Motor chokes

- Compensate the capacitive currents,
- Reduce current ripple and the motor's current change noise,
- Attenuate the retroaction on parallel connection of several motors.

Sine filters or du/dt filter

- Smoothen the output voltage sinusoidally,
- reduce motor noise through du/dt reduction, and thereby increase the motor insulation's lifespan,
- Reduce the leakage currents to allow better motor performance at improved EMC values.

All-pole sine filters

- Smoothen the output voltage sinusoidally,
- reduce motor noise through du/dt reduction, and thereby increase the motor insulation's lifespan,
- Reduce leakage currents and accordingly make it possible to use very long unshielded motor cables with improved EMC values.

Screened motor cables attenuate emitted and conducted high-frequency emissions within the limit values specified in the applicable product standard (EMC). They must be connected to the earth potential on both sides across a large area (PES).


A **three-phase asynchronous motor (standard motor)** converts electrical power ($P \sim U \times I$) into mechanical power ($P \sim M \times n$).

Equipment code

- F = Fuses and circuit breakers
- Q = Controlled switching within energy flow (contactors, circuit breakers)
- R = Limitation (reactors, resistors)
- K = Radio interference suppression filters
- T = Variable frequency drives
- M = Motors

Electrical mains connection

Variable frequency drives can be connected and operated without restriction on star-point-grounded AC supply systems (according to IEC 60364).



Connecting them to and operating them on asymmetrically earthed networks, such as phase-earthed delta networks (grounded delta, USA) or non-earthed or high-resistance earthed (> 30 Ω) IT networks is permitted with limitations. In these networks, only variable frequency drives without internal radio interference suppression filters (EMC)

may be used. On devices with internal radio interference suppression, the ground connection of the filter must be disconnected.

The standardized rated operating voltages of the power supply (EVU) assure the following conditions at the transfer point to the consumer:

- maximum deviation from the rated voltage (U_{LN}): $\pm 10\%$
- Maximum deviation in the voltage symmetry: $\pm 3\%$
- Maximum deviation from the rated frequency value: $\pm 4\%$

A further voltage drop of 4 percent in the consumer networks is permissible in relation to the lower voltage value ($U_{LN} - 10\%$) of the mains voltage.

In mesh networks (such as those found in the EU), the standardized consumer voltages (230/400/690 V) are identical to the utility company's supply voltages. In star networks (for example in North America/USA), the stated consumer voltages take the voltage drop from the utility company's infeed point to the last consumer into account.

North American voltage level

Supply voltage U_{LN} of the EVU	Motor voltage according to UL 508 C	Consumer voltage, rated value for the motors
120 V	110 - 120 V	115 V
240 V	220 - 240 V	230 V
400 V	440 - 480 V	460 V
600 V	550 - 600 V	575 V

Safety and switching

For variable frequency drives, the components placed on the mains-side are assigned as per the input-side rated operational current I_{LN} and the AC-1 utilization category.

Fuses, circuit breakers and conductor cross-sections must meet the national and regional requirements and the required approvals at the point of operation.

For fire prevention and the protection of persons and domestic animals from excessive contact voltages residual current devices (RCD) must be used. Only AC/DC sensitive residual current devices (RCD, type B) may be used in connection with a variable frequency drive that works with a three-phase power supply.

Marking on residual current devices for AC/DC sensitive RCDs, type B:




Earth leakage currents will be produced when using frequency-controlled drives due to the nature of the system. The main reasons for this consist of external capacitances between the phases of the motor cable, the motor cable's screening, star capacitors in the variable frequency drive, and radio interference suppression filters, as well as earthing measures at the motor's site of operation.

These leakage currents can exceed 3.5 mA (AC) and/or greater than 10 mA (DC) can require improved PDS earthing as per EN 50178 (earth cable cross-section $\geq 10 \text{ mm}^2$).

EMC measures

Variable frequency drives work with fast electronic switches (IGBT) in the inverter. This can cause radio interference in a magnet system, which, in turn, can adversely affect nearby electronic equipment. To provide protection against this high-frequency interference, said equipment should be spatially separated and screened from frequency-controlled drives.

In Europe, compliance with the EMC Directive is mandatory and a prerequisite for the CE marking. The EMC conditions for drive systems (PDS) are described in standard IEC/EN 61800-3. This product standard considers the complete magnet system from mains-side power supply right through to the motor. The Eaton variable frequency drive and speed starter with internal/external EMC filter satisfy the requirements of the EMC product standard for the sensitive residential sector (first environment) and therefore also the higher limit values in the industrial sector (second environment).

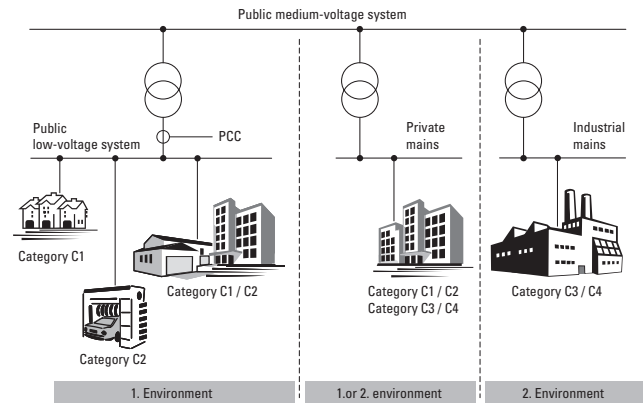


Variable frequency drives



A variable frequency drive is an electronic apparatus used for the variable-speed control of three-phase motors. It is intended for installation in a machine or for assembly with other components to a machine or plant. The main components of a modern compact variable frequency drive are a power section ① and a control section ②. Functional actuation of the variable frequency drive and the output parameters in the power section (e.g. frequency, voltage and current) can be adjusted through:

- Control signal terminals (I/O) with analog and digital (binary) inputs,
- A keypad with function keys and display units,
- Serial interfaces (BUS) with RS485 (Modbus RTU) and optional fieldbus connections (CANopen, PROFIBUS-DP etc.) and an optional PC connection.

Internal open and closed-loop control circuits monitor all variable values in the variable frequency drive and automatically switch the process off if a value reaches a dangerous level.



- ① **Power section with:**
A = Rectifier
B = Internal DC link
C = Inverter (IGBT)
- ② **Control section with:**
I/O = Analog and binary inputs and outputs
KEYPAD = Operating unit with display unit
BUS = Serial ports/interfaces (RS485, field bus, PC interface)

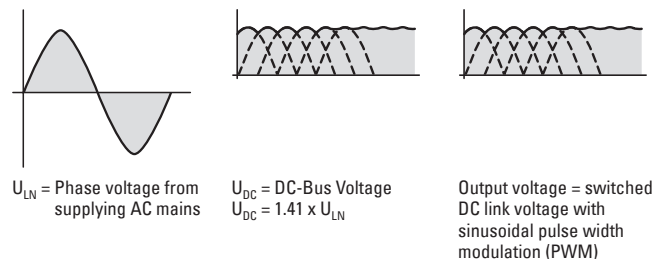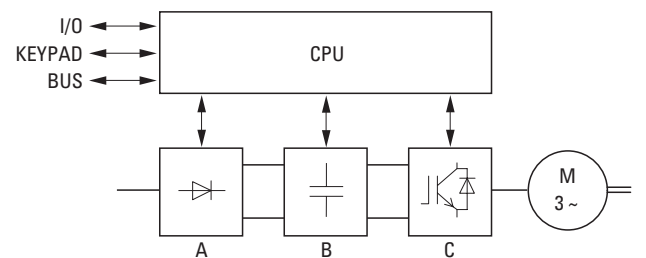

Block diagram with main components of a variable frequency drive

Control methods

The IGBTs in the inverter of the variable frequency drive are controlled with sinusoidal pulse-width modulation (PWM). In real-life applications, the industry draws a distinction between the following control methods:

- Voltage frequency control (U/f control),
- V/Hz control with slip compensation
- Sensorless vector control (speed control)
- Vector control (closed-loop), speed control.

Volts-per-Hertz control is the best known and most commonly used method. In it, the rotating field frequency for the motor is defined with a simple characteristic (linear or quadratic), and the corresponding three-phase line-to-line motor voltage is selected in such a way that the motor will not be undermagnetized or overmagnetized.

The main applications for V/Hz control are:

- Pump and fan drives,
- Horizontal conveying and transportation systems,
- Multiple motor drives (parallel operation of several motors at the variable frequency drive's output).

With the **U/f control section with slip compensation** the load-dependent speed change of individual drives can be compensated for (without sensors).


With **sensorless vector control** the magnetic fields of rotor and stator are opposed to one another. With

asynchronous motors the magnetic flux in the rotor must be mapped in an electronic model of the motor. This requires the input of the physical parameters of the rating plate on the motor.

In vector operation, the variable frequency drive can only control one motor at the output end. A parallel operation of several motors is not possible here. The exact calculation of the phase voltages at the variable frequency drive's output, however, improves the motor's operational behavior. The motor also heats up less in the lower speed range. The field-oriented vector control results in a significant improvement in the drive dynamics as well as optimizing performance; it also increases the range of possible applications. The main applications of sensorless vector control are:

- Material machining and processing equipment
- Condensers (compressor),
- Heavy starting duty (extruder, agitators, mixer),
- Lifting mechanisms and lifting gear (vertical movement, crane, lift).

With the **vector feedback control** the output current of the variable frequency drive acts serves a controlled variable. This makes it possible to perfectly adjust the three-phase motor in line with the corresponding torque boost. The motor speed can be controlled in connection with an rpm sensor (tachometer, pulse generator) (closed loop).

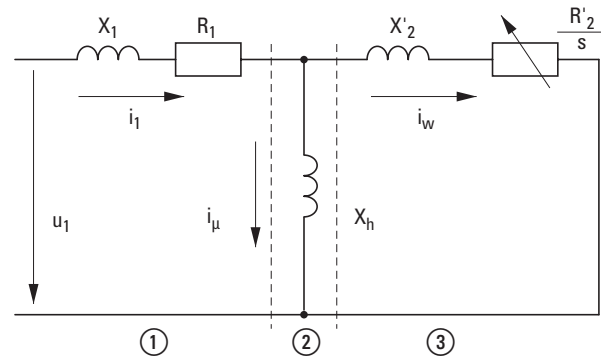

- ① Stator winding
- ② Air gap
- ③ Transformed rotor winding

Simplified equivalent circuit diagram of a three-phase motor

Motor model

Regardless of the control method used, a variable frequency drive uses the measured voltage and current values on the stator winding (u_1, i_1) to calculate the required manipulated variable for flux-generating component i_μ and the torque-forming magnitude in rotor i_w . The motor's load dependent slip is represented as resistor R'_2/s . During no-load operation, this value approaches infinity ($i_w \rightarrow 0$). On the other hand, the value approaches zero as the load increases. The current in the rotor grows at this point.

Explanation:

EMC = Electromagnetic compatibility
 EVU = Power supply companies
 IGBT = Insulated gate bipolar transistor
 PDS = Power drives system
 RCD = Residual current device

Energy-efficient drive control technology (ERP directive)

The need for energy efficiency in a PDS and legislative specifications (EC 640/2009) has been redefined by the minimum efficiency ratings of motors. Accordingly, all motors with a performance range of 0.75 to 1000 kW that are placed on the market on or after July 1st, 2021 will have to meet one of the following two requirements:

A) A minimum efficiency level of IE3

or

B) An efficiency level of IE2 if the motors are coupled with electronic speed control systems (variable frequency drives, variable speed starters).

Under these conditions, the following versions of three-phase motor predominate at the present time:

- Three-phase asynchronous motor (DASM),
- Permanent magnet motor (PM),
- Synchronous reluctance motor (SynRM)

Within the same efficiency class, these three motor technologies have a comparable efficiency rating at their nominal operating point. However, there are significant differences in terms of startup behavior, in part-load operation, in respect of acquisition costs and in terms of size.

The asynchronous motor functions in accordance with the familiar principle whereby the creation of magnetic fields in stator and rotor give rise to repulsion and, in response to that, to rotational movement. This motor can be started directly off the mains supply.

PM motor are synchronous motors, i.e. there is no slip between the rotational fields of rotor and stator. The magnets assure magnetization of the rotor. That reduces losses in the rotor and increases the efficiency rating, especially at low speed. For starting and operational purposes, the PM motor needs to have a variable frequency drive (e.g. DG1 / DM1).

With the SynRM motor, the rotor plates have specific cut sections. These guide the magnetic lines into the interior of the rotor and generate what is known as a reluctance torque. This results in a change of magnetic resistance and is characterized from about 11 kW by a very good efficiency rating at reduced speeds that changes under load. Here too, operation without friction and optimum speed control are only assured through the use of variable frequency drives (DA1).

In principle, all three variants operate using what is known as the U/f characteristics curve but the efficiency benefits of individual technologies are only guaranteed by feedback control algorithms adapted to suit the prevailing motor technology. With algorithms of this kind, motor operation can be optimized at every operating point, even with alternating loads.


Connection example for a 0.75 kW motor

Motor: P = 0.75 kW
 Mains: 3/N/PE 400 V 50/60 Hz
 Connection examples meeting EMC requirements: Power section
 (see figure below)

Variant A:

Motor in delta configuration

DM1... variable frequency drive with single-phase mains supply (230 V)

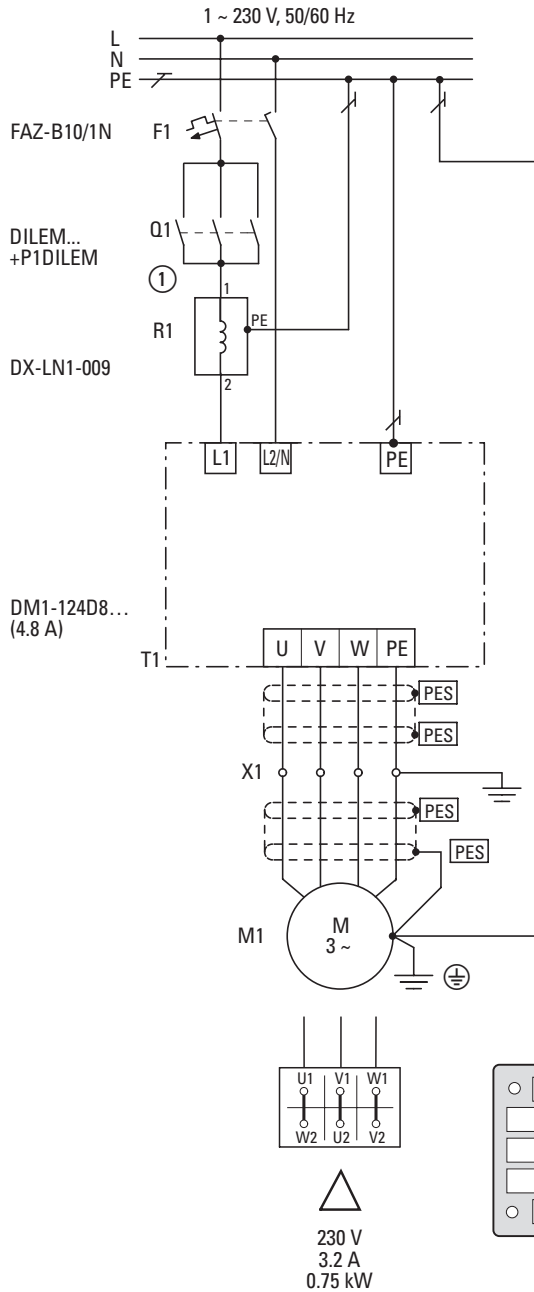


① Optional connection option for single-phase connections

The previously indicated 0.75 kW motor can be connected in a delta configuration for a single-phase 230 V supply system (version A) or in a star configuration for a 400 V supply system (version B). Depending on the mains voltage, a variable frequency drive is selected for 230 V single-phase AC (DM1-124D8...), or a DF5-340 for 400 V three-phase AC (DM1-342D2), together with the corresponding accessories.

Variant B:

Motor in star configuration

DM1... variable frequency drive with three-phase mains supply (400 V)

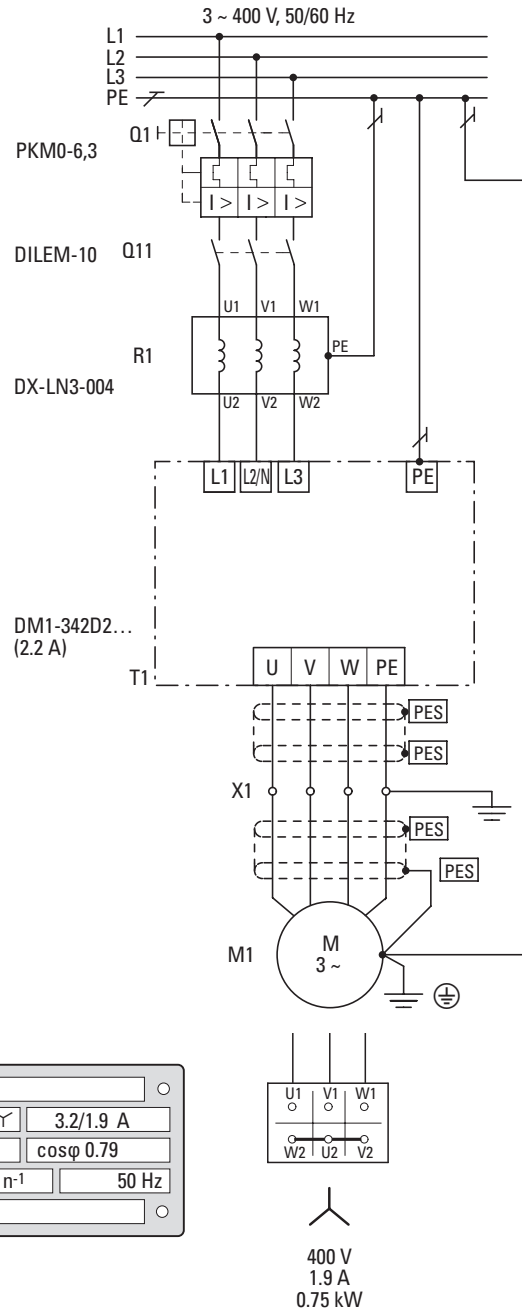



Decentralized Drive System Rapid Link 5

Rapid Link 5 is a decentralized electronic drive system that can be used for simple to complex tasks in all material handling system areas. It provides all the functions needed to switch, control, protect, and network conveyor belt electric motors. Devices are installed close to motors and can be connected quickly and in a foolproof manner

thanks to the use of standard plug connectors. In addition, a key switch can be used to select the manual and automatic operating modes. In automatic mode, the devices can communicate via AS-Interface, PROFINET, or Ethernet/IP.

Performance range:

RAM05 motor starters

- 0.09 - 3 kW (U_g : 3~ 400 V, U_2 : 3~ 400 V)

RASP5 variable frequency drives

- 0.75 - 4 kW (U_g : 3~ 400 V, U_2 : 3~ 400 V)

Applications:

- Intralogistics applications
- Airport logistics / baggage conveyor systems
- Transportation and warehouse logistics
- Belt conveyors
- Roller conveyors
- Chain conveyors
- Pallet conveyors
- Lifting applications
- Corner transfer units
- Mergers / diverters
- Rotary table applications

System features:

- Communication via AS-Interface, PROFINET or Ethernet/IP
- Same base area and hole pattern for all models and power classes
- All terminals pluggable
- Integrated manual / automatic mode
- Robust design with IP65 degree of protection
- Up to 4 sensor inputs and 2 sensor outputs
- International standards (CE, UL, cUL, CCC, RoHS)

Features RAM05

- DOL and reversing starters
- Lifespan of more than 10 million operations
- Programmable motor protection from 90 W to 3 kW (400 V) in a single device

Features RASP5

- Sensorless vector control for all motor types: IE2-, IE3-, IE4-, IE5-motors, Induction motors, Permanent magnet motors, Synchronous reluctance motors, Brushless DC motors
- Short-circuit proof in all operating modes
- Integrated EMC filter
- Integrated braking resistance
- Safe Torque Off (STO, SIL 3, PL e, Cat. 3)

Accessory:

- External keypad
- Parameter storage unit and Bluetooth communication stick
- Adapter cables for various power bus systems
- Motor cables
- drivesConnect parameter configuration software
- drivesConnect mobile App (iOS, Android)



3	Rapid Link 5 decentralized, electronic drive system	
	System overview	272
	Sizes and degree of protection	272
	Key to type references	273
	Ordering	274
	AS-Interface	274
	PROFINET	285
	Ethernet/IP	292
	Accessories	296
	Engineering	297
	RAMO5 with AS-Interface	297
	RASP5 with AS-Interface	298
	RAMO5 with PROFINET or Ethernet/IP	299
	RASP5 with PROFINET or Ethernet/IP	300
	Technical specifications	301
	General rated operational data	301
	Specific rated operational data RAMO5	303
	Specific rated operational data RASP5	304
	Dimensions and weights	305

3

Rapid Link 5 decentralized, electronic drive system

System overview, sizes and degree of protection

System overview



RAM05 motor starter 1

Three-phase electronic DOL starter or reversing starter

- Page 274
- Page 285
- Page 292

RASP5 variable frequency drives 2

Three-phase, frequency-controlled motor starter

- Page 277
- Page 286
- Page 293

Keypad 3

for parameter setting

- Page 296

Communications stick 4

for parameter setting

- Page 296

Power connection cables 5

for connection to a power bus

- Page 296

Unscreened motor cable 6

→ Page 296

Screened motor supply cable (EMC) 7

→ Page 296

Sizes and degree of protection

Frame size





Protection type

IP66/NEMA 12

RAM05-...

RASP5-...

FS1



Key to type references

Motor starter

RAM05 - D 2 0 0 A31 - 512 0 S1

Device series RA = Rapid Link M05 = Motor starter, generation 5
Starters D = Direct-on-line starter (DOL) W = Reversing starter (FWD/REV)
Sensor inputs 2 = 2 sensor inputs (2 x M12, 2 PIN assignment) 4 = 4 sensor inputs (2 x M12, 4 PIN assignment)
Actuator outputs 0 = 0 actuator outputs (0 x M12) 1 = 1 actuator outputs (1 x M12, 2 PIN assignment) 2 = 2 actuator outputs (1 x M12, 4 PIN assignment)
Motor brake drive section 0 = No motor brake drive section 1 = 180/207 V DC motor brake drive section 2 = 230/277 V AC motor brake drive section 4 = 400/480 V AC motor brake drive section

Version S1 = Standard
Repair switch 0 = Without manual override switch R = With manual override switch
Power input plug 512 = HAN Q5, lower input 412 = HAN Q4/2, lower input
Field bus A31 = ASI-3 profiles S-7.4 A32 = ASI-3 profiles S-7.A.E PNT = PROFINET EIP = Ethernet/IP

Variable frequency drives

RASP5 - 2 4 0 0 A31 - 512 0 0 0 0 S1

Device series RA = Rapid Link SP5 = Speed control unit, generation 5
Rated current 2 = 2.4 A (0.75 kW @ 400 V) 4 = 4.3 A (1.5 kW @ 400 V) 5 = 5.6 A (2.2 kW @ 400 V) 8 = 8.5 A (4.0 kW @ 400 V)
Sensor inputs 4 = 4 sensor inputs (2 x M12, 4 PIN assignment)
Actuator outputs 0 = 0 actuator outputs (0 x M12) 2 = 2 actuator outputs (1 x M12, 4 PIN assignment)
Motor brake drive section 0 = No motor brake drive section 1 = 180/207 V DC motor brake drive section 2 = 230/277 V AC motor brake drive section 4 = 400/480 V AC motor brake drive section
Field bus A31 = ASI-3 profile S-7.4 PNT = PROFINET EIP = Ethernet/IP

Version S1 = Standard
Fans 0 = Without fan 1 = With fan (only at 4.0 kW)
Functional safety 0 = Without STO 1 = With STO (Safe Torque Off)
Braking resistance 0 = Without braking resistance 1 = With braking resistance
Repair switch 0 = Without manual override switch R = With manual override switch
Power input plug 512 = HAN Q5, lower input 412 = HAN Q4/2, lower input

Ordering

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Actuator output ⁵⁾	AS-Interface profile		Power supply via		Repair switch	Catalog Number Catalog number	Std. pack
I _e	P	P			S-7.4 ⁶⁾	S-7.A.E ⁷⁾	HAN Q4/2 plug	HAN Q5 plug			
A	kW	HP									

RAM05 motor starter

Rated operating voltage 400 V AC, three-phase, mains voltage (50/60 Hz) U_{LN} 380 (-10%) - 480 (+10%) V

Direct-on-line starter, 2 sensor inputs

I _e	P	P			✓	–	✓	–	–	Catalog Number Catalog number	Std. pack
6.6	3	3	–	0	✓	–	✓	–	–	RAM05-D200A31-4120S1 199060	1 unit
					✓	–	✓	–	✓	RAM05-D200A31-412RS1 199069	
					✓	–	–	✓	–	RAM05-D200A31-5120S1 198517	
					✓	–	–	✓	✓	RAM05-D200A31-512RS1 198518	
					–	✓	✓	–	–	RAM05-D200A32-4120S1 199064	
					–	✓	✓	–	✓	RAM05-D200A32-412RS1 199075	
					–	✓	–	✓	✓	RAM05-D200A32-512RS1 199073	
			180/207 V DC		✓	–	✓	–	–	RAM05-D201A31-4120S1 199061	
					✓	–	✓	–	✓	RAM05-D201A31-412RS1 199070	
					✓	–	–	✓	✓	RAM05-D201A31-512RS1 199068	
					–	✓	✓	–	–	RAM05-D201A32-4120S1 199065	
					–	✓	✓	–	✓	RAM05-D201A32-412RS1 199076	
					–	✓	–	✓	✓	RAM05-D201A32-512RS1 199074	
			230/277 V AC		✓	–	✓	–	–	RAM05-D202A31-4120S1 199062	
					✓	–	✓	–	✓	RAM05-D202A31-412RS1 199071	
					✓	–	–	✓	–	RAM05-D202A31-5120S1 198519	
					✓	–	–	✓	✓	RAM05-D202A31-512RS1 198520	
					✓	–	–	✓	–	RAM05-D212A31-5120S1 198527	
					–	✓	✓	–	–	RAM05-D202A32-4120S1 199066	
					–	✓	✓	–	✓	RAM05-D202A32-412RS1 199077	
					–	✓	–	✓	–	RAM05-D202A32-5120S1 198521	
					–	✓	–	✓	✓	RAM05-D202A32-512RS1 198522	
			400/480 V AC		✓	–	✓	–	–	RAM05-D204A31-4120S1 199063	
					✓	–	✓	–	✓	RAM05-D204A31-412RS1 199072	
					✓	–	–	✓	–	RAM05-D204A31-5120S1 198523	
					✓	–	–	✓	✓	RAM05-D204A31-512RS1 198524	
					✓	–	–	✓	–	RAM05-D214A31-5120S1 198528	
					–	✓	✓	–	–	RAM05-D204A32-4120S1 199067	
					–	✓	✓	–	✓	RAM05-D204A32-412RS1 199078	
					–	✓	–	✓	–	RAM05-D204A32-5120S1 198525	
					–	✓	–	✓	✓	RAM05-D204A32-512RS1 198526	

Notes

- ¹⁾ 0.3 - 6.6 adjustable
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz, at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Operation with external 24 V DC supply
- ⁶⁾ Profile with 31 modules
- ⁷⁾ Profile with 62 modules

Rated operational current ¹⁾ I_e	Assigned motor output ²⁾³⁾ P P		Control voltage external brake (50/60 Hz) ⁴⁾	Actuator output ⁵⁾	AS-Interface profile		Power supply via		Repair switch	Model code Catalog number	Std. pack
					S-7.4 ⁶⁾	S-7.A.E ⁷⁾	HAN Q4/2 plug	HAN Q5 plug			
A	kW	HP									

RAM05 motor starter

Rated operating voltage 400 V AC, three-phase, mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V

Reversing starter with selector switch REV - OFF - FWD, 2 sensor inputs

6.6	3	3	-	0	✓	-	✓	-	-	RAM05-W200A31-4120S1 199080	1 unit
				0	✓	-	✓	-	✓	RAM05-W200A31-412RS1 199099	
				1	✓	-	✓	-	-	RAM05-W210A31-4120S1 199084	
				1	✓	-	✓	-	✓	RAM05-W210A31-412RS1 199103	
				0	✓	-	-	✓	-	RAM05-W200A31-5120S1 198529	
				0	✓	-	-	✓	✓	RAM05-W200A31-512RS1 198530	
				0	-	✓	✓	-	-	RAM05-W200A32-4120S1 199090	
				0	-	✓	✓	-	✓	RAM05-W200A32-412RS1 199109	
				1	-	✓	✓	-	-	RAM05-W210A32-4120S1 199094	
				1	-	✓	✓	-	✓	RAM05-W210A32-412RS1 199113	
				0	-	✓	-	✓	-	RAM05-W200A32-5120S1 199088	
				0	-	✓	-	✓	✓	RAM05-W200A32-512RS1 199107	
			180/207 V DC	0	✓	-	✓	-	-	RAM05-W201A31-4120S1 199081	
				0	✓	-	✓	-	✓	RAM05-W201A31-412RS1 199100	
				1	✓	-	✓	-	-	RAM05-W211A31-4120S1 199085	
				1	✓	-	✓	-	✓	RAM05-W211A31-412RS1 199104	
				0	✓	-	-	✓	-	RAM05-W201A31-5120S1 199079	
				0	✓	-	-	✓	✓	RAM05-W201A31-512RS1 199098	
				0	-	✓	✓	-	-	RAM05-W201A32-4120S1 199091	
				0	-	✓	✓	-	✓	RAM05-W201A32-412RS1 199110	
				1	-	✓	✓	-	-	RAM05-W211A32-4120S1 199095	
				1	-	✓	✓	-	✓	RAM05-W211A32-412RS1 199114	
				0	-	✓	-	✓	-	RAM05-W201A32-5120S1 199089	
				0	-	✓	-	✓	✓	RAM05-W201A32-512RS1 199108	
			230/277 V AC	0	✓	-	✓	-	-	RAM05-W202A31-4120S1 199082	
				0	✓	-	✓	-	✓	RAM05-W202A31-412RS1 199101	
				1	✓	-	✓	-	-	RAM05-W212A31-4120S1 199086	
				1	✓	-	✓	-	✓	RAM05-W212A31-412RS1 199105	

Notes

- ¹⁾ 0,3 - 6.6 adjustable
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz, at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Operation with external 24 V DC supply
- ⁶⁾ Profile with 31 modules
- ⁷⁾ Profile with 62 modules

3

Rapid Link 5 decentralized, electronic drive system

AS-Interface

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Actuator output ⁵⁾	AS-Interface profile		Power supply via		Repair switch	Model code Catalog number	Std. pack
I _e	P	P			S-7.4 ⁶⁾	S-7.A.E ⁷⁾	HAN Q4/2 plug	HAN Q5 plug			
A	kW	HP									

RAM05 motor starter

Rated operating voltage 400 V AC, three-phase, mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V

Reversing starter with selector switch REV - OFF - FWD, 2 sensor inputs

I _e	P	P	Control voltage external brake (50/60 Hz) ⁴⁾	Actuator output ⁵⁾	S-7.4 ⁶⁾	S-7.A.E ⁷⁾	HAN Q4/2 plug	HAN Q5 plug	Repair switch	Model code Catalog number	Std. pack			
6.6	3	3	230/277 V AC	0	✓	-	-	✓	-	RAM05-W202A31-5120S1 198531	1 unit			
				0	✓	-	-	✓	✓	RAM05-W202A31-512RS1 198532				
				1	✓	-	-	✓	-	RAM05-W212A31-5120S1 198539				
				0	-	✓	✓	-	-	RAM05-W202A32-4120S1 199092				
				0	-	✓	✓	-	✓	RAM05-W202A32-412RS1 199111				
				1	-	✓	✓	-	-	RAM05-W212A32-4120S1 199096				
				1	-	✓	✓	-	✓	RAM05-W212A32-412RS1 199115				
				0	-	✓	-	✓	-	RAM05-W202A32-5120S1 198533				
				0	-	✓	-	✓	✓	RAM05-W202A32-512RS1 198534				
			1	-	✓	-	✓	-	RAM05-W212A32-5120S1 198540					
			400/480 V AC				0	✓	-	✓		-	-	RAM05-W204A31-4120S1 199083
							0	✓	-	✓		-	✓	RAM05-W204A31-412RS1 199102
							1	✓	-	✓		-	-	RAM05-W214A31-4120S1 199087
							1	✓	-	✓		-	✓	RAM05-W214A31-412RS1 199106
							0	✓	-	-		✓	-	RAM05-W204A31-5120S1 198535
							0	✓	-	-		✓	✓	RAM05-W204A31-512RS1 198536
							1	✓	-	-		✓	-	RAM05-W214A31-5120S1 198541
							0	-	✓	✓		-	-	RAM05-W204A32-4120S1 199093
0	-	✓					✓	-	✓	RAM05-W204A32-412RS1 199112				
1	-	✓					✓	-	-	RAM05-W214A32-4120S1 199097				
1	-	✓	✓	-	✓	RAM05-W214A32-412RS1 199116								
0	-	✓	-	✓	-	RAM05-W204A32-5120S1 198537								
0	-	✓	-	✓	✓	RAM05-W204A32-512RS1 198538								

Notes

- ¹⁾ 0.3 - 6.6 adjustable
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz, at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Operation with external 24 V DC supply
- ⁶⁾ Profile with 31 modules
- ⁷⁾ Profile with 62 modules

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
I_e	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
 Mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V
 4 sensor inputs, without actuator output, AS-Interface profile S7.4 (for 31 modules)

2.4	0.75	1	-	✓	-	-	-	-	RASP5-2400A31-412000S1 198728	1 unit
				✓	-	-	-	✓	RASP5-2400A31-412001S1 198736	
				✓	-	-	-	-	RASP5-2400A31-412R00S1 198744	
				✓	-	-	-	✓	RASP5-2400A31-412R01S1 198752	
				✓	-	-	✓	-	RASP5-2400A31-412010S1 198732	
				✓	-	-	✓	✓	RASP5-2400A31-412011S1 198740	
				✓	-	✓	✓	-	RASP5-2400A31-412R10S1 198748	
				✓	-	✓	✓	✓	RASP5-2400A31-412R11S1 198756	
				-	✓	-	-	-	RASP5-2400A31-512000S1 198542	
				-	✓	-	-	-	RASP5-2400A31-512R00S1 198548	
				-	✓	-	✓	-	RASP5-2400A31-512010S1 198545	
				-	✓	✓	✓	-	RASP5-2400A31-512R10S1 198551	
			180/207 V DC	✓	-	-	-	-	RASP5-2401A31-412000S1 198729	
				✓	-	-	-	✓	RASP5-2401A31-412001S1 198737	
				✓	-	-	-	-	RASP5-2401A31-412R00S1 198745	
				✓	-	-	-	✓	RASP5-2401A31-412R01S1 198753	
				✓	-	-	✓	-	RASP5-2401A31-412010S1 198733	
				✓	-	-	✓	✓	RASP5-2401A31-412011S1 198741	
				✓	-	✓	✓	-	RASP5-2401A31-412R10S1 198749	
				✓	-	✓	✓	✓	RASP5-2401A31-412R11S1 198757	
				-	✓	-	-	-	RASP5-2401A31-512000S1 198724	
				-	✓	-	-	-	RASP5-2401A31-512R00S1 198726	
				-	✓	-	✓	-	RASP5-2401A31-512010S1 198725	
				-	✓	✓	✓	-	RASP5-2401A31-512R10S1 198727	
			230/277 V AC	✓	-	-	-	-	RASP5-2402A31-412000S1 198730	
				✓	-	-	-	✓	RASP5-2402A31-412001S1 198738	
				✓	-	-	-	-	RASP5-2402A31-412R00S1 198746	
				✓	-	-	-	✓	RASP5-2402A31-412R01S1 198754	

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

3

Rapid Link 5 decentralized, electronic drive system

AS-Interface

Rated operational current ¹⁾ I_e	Assigned motor output ²⁾³⁾ P P		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
	kW	HP		HAN Q4/2 plug	HAN Q5 plug					

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, without actuator output, AS-Interface profile S7.4 (for 31 modules)

2.4	0.75	1	230/277 V AC	✓	-	-	✓	-	RASP5-2402A31-4120100S1 198734	1 unit	
				✓	-	-	✓	✓	RASP5-2402A31-4120110S1 198742		
				✓	-	✓	✓	-	RASP5-2402A31-412R100S1 198750		
				✓	-	✓	✓	✓	RASP5-2402A31-412R110S1 198758		
				-	✓	-	-	-	RASP5-2402A31-5120000S1 198543		
				-	✓	-	-	-	RASP5-2402A31-512R000S1 198549		
				-	✓	-	✓	-	RASP5-2402A31-5120100S1 198546		
				-	✓	✓	✓	-	RASP5-2402A31-512R100S1 198552		
				400/480 V AC	✓	-	-	-	-		RASP5-2404A31-4120000S1 198731
					✓	-	-	-	✓		RASP5-2404A31-4120010S1 198739
					✓	-	-	-	-		RASP5-2404A31-412R000S1 198747
					✓	-	-	-	✓		RASP5-2404A31-412R010S1 198755
					✓	-	-	✓	-		RASP5-2404A31-4120100S1 198735
					✓	-	-	✓	✓		RASP5-2404A31-4120110S1 198743
✓	-	✓	✓		-	RASP5-2404A31-412R100S1 198751					
✓	-	✓	✓		✓	RASP5-2404A31-412R110S1 198759					
-	✓	-	-		-	RASP5-2404A31-5120000S1 198544					
-	✓	-	-		-	RASP5-2404A31-512R000S1 198550					
-	✓	-	✓	-	RASP5-2404A31-5120100S1 198547						
-	✓	✓	✓	-	RASP5-2404A31-512R100S1 198553						
4.3	1.5	2	-	✓	-	-	-	-	RASP5-4400A31-4120000S1 198764		
				✓	-	-	-	✓	RASP5-4400A31-4120010S1 198772		
				✓	-	-	-	-	RASP5-4400A31-412R000S1 198780		
				✓	-	-	-	✓	RASP5-4400A31-412R010S1 198788		
				✓	-	-	✓	-	RASP5-4400A31-4120100S1 198768		
				✓	-	-	✓	✓	RASP5-4400A31-4120110S1 198776		
				✓	-	✓	✓	-	RASP5-4400A31-412R100S1 198784		
				✓	-	✓	✓	✓	RASP5-4400A31-412R110S1 198792		

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
 Mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V
 4 sensor inputs, without actuator output, AS-Interface profile S7.4 (for 31 modules)

4.3	1.5	2	-	-	✓	-	-	-	RASP5-4400A31-512000S1 198554	1 unit
					✓	-	-	-	RASP5-4400A31-512R000S1 198560	
					✓	-	✓	-	RASP5-4400A31-5120100S1 198557	
					✓	✓	✓	-	RASP5-4400A31-512R100S1 198563	
			180/207 V DC	✓	-	-	-	-	RASP5-4401A31-4120000S1 198765	
				✓	-	-	-	✓	RASP5-4401A31-4120010S1 198773	
				✓	-	-	-	-	RASP5-4401A31-412R000S1 198781	
				✓	-	-	-	✓	RASP5-4401A31-412R010S1 198789	
				✓	-	-	✓	-	RASP5-4401A31-4120100S1 198769	
				✓	-	-	✓	✓	RASP5-4401A31-4120110S1 198777	
				✓	-	✓	✓	-	RASP5-4401A31-412R100S1 198785	
				✓	-	✓	✓	✓	RASP5-4401A31-412R110S1 198793	
				-	✓	-	-	-	RASP5-4401A31-5120000S1 198760	
				-	✓	-	-	-	RASP5-4401A31-512R000S1 198762	
				-	✓	-	✓	-	RASP5-4401A31-5120100S1 198761	
				-	✓	✓	✓	-	RASP5-4401A31-512R100S1 198763	
			230/277 V AC	✓	-	-	-	-	RASP5-4402A31-4120000S1 198766	
				✓	-	-	-	✓	RASP5-4402A31-4120010S1 198774	
				✓	-	-	-	-	RASP5-4402A31-412R000S1 198782	
				✓	-	-	-	✓	RASP5-4402A31-412R010S1 198790	
				✓	-	-	✓	-	RASP5-4402A31-4120100S1 198770	
				✓	-	-	✓	✓	RASP5-4402A31-4120110S1 198778	
				✓	-	✓	✓	-	RASP5-4402A31-412R100S1 198786	
				✓	-	✓	✓	✓	RASP5-4402A31-412R110S1 198794	
				-	✓	-	-	-	RASP5-4402A31-5120000S1 198555	
				-	✓	-	-	-	RASP5-4402A31-512R000S1 198561	
				-	✓	-	✓	-	RASP5-4402A31-5120100S1 198558	
				-	✓	✓	✓	-	RASP5-4402A31-512R100S1 198564	

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

3

Rapid Link 5 decentralized, electronic drive system

AS-Interface

Rated operational current ¹⁾ I_e	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, without actuator output, AS-Interface profile S7.4 (for 31 modules)

4.3	1.5	2	400/480 V AC	✓	-	-	-	-	RASP5-4404A31-412000S1 198767	1 unit				
				✓	-	-	-	✓	RASP5-4404A31-412001S1 198775					
				✓	-	-	-	-	RASP5-4404A31-412R00S1 198783					
				✓	-	-	-	✓	RASP5-4404A31-412R01S1 198791					
				✓	-	-	✓	-	RASP5-4404A31-412010S1 198771					
				✓	-	-	✓	✓	RASP5-4404A31-412011S1 198779					
				✓	-	✓	✓	-	RASP5-4404A31-412R10S1 198787					
				✓	-	✓	✓	✓	RASP5-4404A31-412R11S1 198795					
				-	✓	-	-	-	RASP5-4404A31-512000S1 198556					
				-	✓	-	-	-	RASP5-4404A31-512R00S1 198562					
				-	✓	-	✓	-	RASP5-4404A31-512010S1 198559					
				-	✓	✓	✓	-	RASP5-4404A31-512R10S1 198565					
				5.6	2.2	3	-	✓	-		-	-	-	RASP5-5400A31-412000S1 198800
								✓	-		-	-	✓	RASP5-5400A31-412001S1 198808
✓	-	-	-					-	RASP5-5400A31-412R00S1 198816					
✓	-	-	-					✓	RASP5-5400A31-412R01S1 198824					
✓	-	-	✓					-	RASP5-5400A31-412010S1 198804					
✓	-	-	✓					✓	RASP5-5400A31-412011S1 198812					
✓	-	✓	✓					-	RASP5-5400A31-412R10S1 198820					
✓	-	✓	✓					✓	RASP5-5400A31-412R11S1 198828					
-	✓	-	-					-	RASP5-5400A31-512000S1 198566					
-	✓	-	-					-	RASP5-5400A31-512R00S1 198572					
-	✓	-	✓					-	RASP5-5400A31-512010S1 198569					
-	✓	✓	✓					-	RASP5-5400A31-512R10S1 198575					
180/207 V DC								✓	-	-	-	-	RASP5-5401A31-412000S1 198801	
								✓	-	-	-	✓	RASP5-5401A31-412001S1 198809	
				✓	-	-	-	-	RASP5-5401A31-412R00S1 198817					
				✓	-	-	-	✓	RASP5-5401A31-412R01S1 198825					

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

Rated operational current ¹⁾ I _e	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
 Mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V
 4 sensor inputs, without actuator output, AS-Interface profile S7.4 (for 31 modules)

5.6	2.2	3	180/207 V DC	✓	-	-	✓	-	RASP5-5401A31-4120100S1 198805	1 unit			
				✓	-	-	✓	✓	RASP5-5401A31-4120110S1 198813				
				✓	-	✓	✓	-	RASP5-5401A31-412R100S1 198821				
				✓	-	✓	✓	✓	RASP5-5401A31-412R110S1 198829				
				-	✓	-	-	-	RASP5-5401A31-5120000S1 198796				
				-	✓	-	-	-	RASP5-5401A31-512R000S1 198798				
				-	✓	-	✓	-	RASP5-5401A31-5120100S1 198797				
				-	✓	✓	✓	-	RASP5-5401A31-512R100S1 198799				
							230/277 V AC	✓	-		-	-	RASP5-5402A31-4120000S1 198802
				✓	-	-		-	✓		RASP5-5402A31-4120010S1 198810		
				✓	-	-		-	-		RASP5-5402A31-412R000S1 198818		
				✓	-	-		-	✓		RASP5-5402A31-412R010S1 198826		
✓	-	-	✓	-	RASP5-5402A31-4120100S1 198806								
✓	-	-	✓	✓	RASP5-5402A31-4120110S1 198814								
✓	-	✓	✓	-	RASP5-5402A31-412R100S1 198822								
✓	-	✓	✓	✓	RASP5-5402A31-412R110S1 198830								
-	✓	-	-	-	RASP5-5402A31-5120000S1 198567								
-	✓	-	-	-	RASP5-5402A31-512R000S1 198573								
-	✓	-	✓	-	RASP5-5402A31-5120100S1 198570								
-	✓	✓	✓	-	RASP5-5402A31-512R100S1 198576								
			400/480 V AC	✓	-	-	-	RASP5-5404A31-4120000S1 198803					
✓	-	-		-	✓	RASP5-5404A31-4120010S1 198811							
✓	-	-		-	-	RASP5-5404A31-412R000S1 198819							
✓	-	-		-	✓	RASP5-5404A31-412R010S1 198827							
✓	-	-		✓	-	RASP5-5404A31-4120100S1 198807							
✓	-	-		✓	✓	RASP5-5404A31-4120110S1 198815							
✓	-	✓		✓	-	RASP5-5404A31-412R100S1 198823							
✓	-	✓		✓	✓	RASP5-5404A31-412R110S1 198831							

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

3

Rapid Link 5 decentralized, electronic drive system

AS-Interface

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
I_e	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, without actuator output, AS-Interface profile S7.4 (for 31 modules)

5.6	2.2	3	400/480 V AC	-	✓	-	-	-	RASP5-5404A31-512000S1 198568	1 unit
			400/480 V AC	-	✓	-	-	-	RASP5-5404A31-512R00S1 198574	
			400/480 V AC	-	✓	-	✓	-	RASP5-5404A31-512010S1 198571	
			400/480 V AC	-	✓	✓	✓	-	RASP5-5404A31-512R10S1 198577	

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
I _e	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
 Mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V
 4 sensor inputs, without actuator output, AS-Interface profile S7.4 (for 31 modules)

8.5	4	5	-	✓	-	-	-	-	RASP5-8400A31-4120001S1 198836	1 unit
				✓	-	-	-	✓	RASP5-8400A31-4120011S1 198844	
				✓	-	-	-	-	RASP5-8400A31-412R001S1 198852	
				✓	-	-	-	✓	RASP5-8400A31-412R011S1 198860	
				✓	-	-	✓	-	RASP5-8400A31-4120101S1 198840	
				✓	-	-	✓	✓	RASP5-8400A31-4120111S1 198848	
				✓	-	✓	✓	-	RASP5-8400A31-412R101S1 198856	
				✓	-	✓	✓	✓	RASP5-8400A31-412R111S1 198864	
				-	✓	-	-	-	RASP5-8400A31-5120001S1 198578	
				-	✓	-	-	-	RASP5-8400A31-512R001S1 198584	
				-	✓	-	✓	-	RASP5-8400A31-5120101S1 198581	
				-	✓	✓	✓	-	RASP5-8400A31-512R101S1 198587	
			180/207 V DC	✓	-	-	-	-	RASP5-8401A31-4120001S1 198837	
				✓	-	-	-	✓	RASP5-8401A31-4120011S1 198845	
				✓	-	-	-	-	RASP5-8401A31-412R001S1 198853	
				✓	-	-	-	✓	RASP5-8401A31-412R011S1 198861	
				✓	-	-	✓	-	RASP5-8401A31-4120101S1 198841	
				✓	-	-	✓	✓	RASP5-8401A31-4120111S1 198849	
				✓	-	✓	✓	-	RASP5-8401A31-412R101S1 198857	
				✓	-	✓	✓	✓	RASP5-8401A31-412R111S1 198865	
				-	✓	-	-	-	RASP5-8401A31-5120001S1 198832	
				-	✓	-	-	-	RASP5-8401A31-512R001S1 198834	
				-	✓	-	✓	-	RASP5-8401A31-5120101S1 198833	
				-	✓	✓	✓	-	RASP5-8401A31-512R101S1 198835	
			230/277 V AC	✓	-	-	-	-	RASP5-8402A31-4120001S1 198838	
				✓	-	-	-	✓	RASP5-8402A31-4120011S1 198846	
				✓	-	-	-	-	RASP5-8402A31-412R001S1 198854	
				✓	-	-	-	✓	RASP5-8402A31-412R011S1 198862	

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

3

Rapid Link 5 decentralized, electronic drive system

AS-Interface

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
I_e	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, without actuator output, AS-Interface profile S7.4 (for 31 modules)

8.5	4	5	230/277 V AC	✓	-	-	✓	-	RASP5-8402A31-4120101S1 198842	1 unit	
				✓	-	-	✓	✓	RASP5-8402A31-4120111S1 198850		
				✓	-	✓	✓	-	RASP5-8402A31-412R101S1 198858		
				✓	-	✓	✓	✓	RASP5-8402A31-412R111S1 198866		
				-	✓	-	-	-	RASP5-8402A31-5120001S1 198579		
				-	✓	-	-	-	RASP5-8402A31-512R001S1 198585		
				-	✓	-	✓	-	RASP5-8402A31-5120101S1 198582		
				-	✓	✓	✓	-	RASP5-8402A31-512R101S1 198588		
				400/480 V AC	✓	-	-	-	-		RASP5-8404A31-4120001S1 198839
					✓	-	-	-	✓		RASP5-8404A31-4120011S1 198847
					✓	-	-	-	-		RASP5-8404A31-412R001S1 198855
					✓	-	-	-	✓		RASP5-8404A31-412R011S1 198863
					✓	-	-	✓	-		RASP5-8404A31-4120101S1 198843
					✓	-	-	✓	✓		RASP5-8404A31-4120111S1 198851
✓	-	✓	✓		-	RASP5-8404A31-412R101S1 198859					
✓	-	✓	✓		✓	RASP5-8404A31-412R111S1 198867					
-	✓	-	-		-	RASP5-8404A31-5120001S1 198580					
-	✓	-	-		-	RASP5-8404A31-512R001S1 198586					
-	✓	-	✓	-	RASP5-8404A31-5120101S1 198583						
-	✓	✓	✓	-	RASP5-8404A31-512R101S1 198589						

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Model code Catalog number	Std. pack
	I _e	P		P	HAN Q4/2 plug			
A	kW	HP						

RAM05 motor starter

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, 2 sensor outputs

DOL starter										
6.6	3	3	-	✓	-	-	RAM05-D420PNT-4120S1 199125	1 unit		
				✓	-	✓	RAM05-D420PNT-412RS1 199129			
				180/207 V DC	✓	-	-		RAM05-D421PNT-4120S1 199126	
				✓	-	✓	RAM05-D421PNT-412RS1 199130			
				230/277 V AC	✓	-	-		RAM05-D422PNT-4120S1 199127	
				✓	-	✓	RAM05-D422PNT-412RS1 199131			
	400/480 V AC	✓	-	-	RAM05-D424PNT-4120S1 199128					
		✓	-	✓	RAM05-D424PNT-412RS1 199132					
		Reversing starter with selector switch REV - OFF - FWD								
		6.6	3	3	-	✓	-	-	RAM05-W420PNT-4120S1 199133	1 unit
						✓	-	✓	RAM05-W420PNT-412RS1 199137	
						180/207 V DC	✓	-	-	
✓	-					✓	RAM05-W421PNT-412RS1 199138			
230/277 V AC	✓					-	-	RAM05-W422PNT-4120S1 199135		
✓	-					✓	RAM05-W422PNT-412RS1 199139			
400/480 V AC	✓		-	-	RAM05-W424PNT-4120S1 199136					
	✓		-	✓	RAM05-W424PNT-412RS1 199140					

Notes

- ¹⁾ 0,3 - 6.6 adjustable
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Operation with external 24 V DC supply

3

Rapid Link 5 decentralized, electronic drive system

PROFINET

Rated operational current ¹⁾ I _e	Assigned motor output ²⁾³⁾ P		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
	P	HP		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								
RASP5 variable frequency drives										
Rated operating voltage 400 V AC, three-phase Mains voltage (50/60 Hz) U _{LN} 380 (-10%) - 480 (+10%) V 4 sensor inputs, 2 sensor outputs										
2.4	0.75	1	-	✓	-	-	-	-	RASP5-2420PNT-4120000S1 198932	1 unit
				✓	-	-	-	✓	RASP5-2420PNT-4120010S1 198940	
				✓	-	-	-	-	RASP5-2420PNT-412R000S1 198948	
				✓	-	-	-	✓	RASP5-2420PNT-412R010S1 198956	
				✓	-	-	✓	-	RASP5-2420PNT-4120100S1 198936	
				✓	-	-	✓	✓	RASP5-2420PNT-4120110S1 198944	
				✓	-	✓	✓	-	RASP5-2420PNT-412R100S1 198952	
				✓	-	✓	✓	✓	RASP5-2420PNT-412R110S1 198960	
			180/207 V DC	✓	-	-	-	-	RASP5-2421PNT-4120000S1 198933	
				✓	-	-	-	✓	RASP5-2421PNT-4120010S1 198941	
				✓	-	-	-	-	RASP5-2421PNT-412R000S1 198949	
				✓	-	-	-	✓	RASP5-2421PNT-412R010S1 198957	
				✓	-	-	✓	-	RASP5-2421PNT-4120100S1 198937	
				✓	-	-	✓	✓	RASP5-2421PNT-4120110S1 198945	
				✓	-	✓	✓	-	RASP5-2421PNT-412R100S1 198953	
				✓	-	✓	✓	✓	RASP5-2421PNT-412R110S1 198961	
			230/277 V AC	✓	-	-	-	-	RASP5-2422PNT-4120000S1 198934	
				✓	-	-	-	✓	RASP5-2422PNT-4120010S1 198942	
				✓	-	-	-	-	RASP5-2422PNT-412R000S1 198950	
				✓	-	-	-	✓	RASP5-2422PNT-412R010S1 198958	
				✓	-	-	✓	-	RASP5-2422PNT-4120100S1 198938	
				✓	-	-	✓	✓	RASP5-2422PNT-4120110S1 198946	
				✓	-	✓	✓	-	RASP5-2422PNT-412R100S1 198954	
				✓	-	✓	✓	✓	RASP5-2422PNT-412R110S1 198962	
			400/480 V AC	✓	-	-	-	-	RASP5-2424PNT-4120000S1 198935	
				✓	-	-	-	✓	RASP5-2424PNT-4120010S1 198943	
				✓	-	-	-	-	RASP5-2424PNT-412R000S1 198951	
				✓	-	-	-	✓	RASP5-2424PNT-412R010S1 198959	

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
I_e	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60 Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, 2 sensor outputs

2.4	0.75	1	400/480 V AC	✓	–	–	✓	–	RASP5-2424PNT-4120100S1 198939	1 unit
				✓	–	–	✓	✓	RASP5-2424PNT-4120110S1 198947	
				✓	–	✓	✓	–	RASP5-2424PNT-412R100S1 198955	
				✓	–	✓	✓	✓	RASP5-2424PNT-412R110S1 198963	
4.3	1.5	2	–	✓	–	–	–	–	RASP5-4420PNT-4120000S1 198964	
				✓	–	–	–	✓	RASP5-4420PNT-4120010S1 198972	
				✓	–	–	–	–	RASP5-4420PNT-412R000S1 198980	
				✓	–	–	–	✓	RASP5-4420PNT-412R010S1 198988	
				✓	–	–	✓	–	RASP5-4420PNT-4120100S1 198968	
				✓	–	–	✓	✓	RASP5-4420PNT-4120110S1 198976	
				✓	–	✓	✓	–	RASP5-4420PNT-412R100S1 198984	
				✓	–	✓	✓	✓	RASP5-4420PNT-412R110S1 198992	
				✓	–	–	–	–	RASP5-4421PNT-4120000S1 198965	
				✓	–	–	–	✓	RASP5-4421PNT-4120010S1 198973	
				✓	–	–	–	–	RASP5-4421PNT-412R000S1 198981	
				✓	–	–	–	✓	RASP5-4421PNT-412R010S1 198989	
				✓	–	–	✓	–	RASP5-4421PNT-4120100S1 198969	
				✓	–	–	✓	✓	RASP5-4421PNT-4120110S1 198977	
				✓	–	✓	✓	–	RASP5-4421PNT-412R100S1 198985	
				✓	–	✓	✓	✓	RASP5-4421PNT-412R110S1 198993	
230/277 V AC				✓	–	–	–	–	RASP5-4422PNT-4120000S1 198966	
				✓	–	–	–	✓	RASP5-4422PNT-4120010S1 198974	
				✓	–	–	–	–	RASP5-4422PNT-412R000S1 198982	
				✓	–	–	–	✓	RASP5-4422PNT-412R010S1 198990	
				✓	–	–	✓	–	RASP5-4422PNT-4120100S1 198970	
				✓	–	–	✓	✓	RASP5-4422PNT-4120110S1 198978	
				✓	–	✓	✓	–	RASP5-4422PNT-412R100S1 198986	
				✓	–	✓	✓	✓	RASP5-4422PNT-412R110S1 198994	

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

3

Rapid Link 5 decentralized, electronic drive system

PROFINET

Rated operational current ¹⁾ I _e	Assigned motor output ²⁾³⁾ P P		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack	
	A	kW		HP	HAN Q4/2 plug						HAN Q5 plug
RASP5 variable frequency drives											
Rated operating voltage 400 V AC, three-phase Mains voltage (50/60 Hz) U _{LN} 380 (-10%) - 480 (+10%) V 4 sensor inputs, 2 sensor outputs											
4.3	1.5	2	400/480 V AC	✓	–	–	–	–	RASP5-4424PNT-412000S1 198967	1 unit	
				✓	–	–	–	✓	RASP5-4424PNT-412001S1 198975		
				✓	–	–	–	–	RASP5-4424PNT-412R00S1 198983		
				✓	–	–	–	✓	RASP5-4424PNT-412R01S1 198991		
				✓	–	–	✓	–	RASP5-4424PNT-412010S1 198971		
				✓	–	–	✓	✓	RASP5-4424PNT-412011S1 198979		
				✓	–	✓	✓	–	RASP5-4424PNT-412R10S1 198987		
				✓	–	✓	✓	✓	RASP5-4424PNT-412R11S1 198995		
5.6	2.2	3	–	✓	–	–	–	–	RASP5-5420PNT-412000S1 198996		
				✓	–	–	–	✓	RASP5-5420PNT-412001S1 199004		
				✓	–	–	–	–	RASP5-5420PNT-412R00S1 199012		
				✓	–	–	–	✓	RASP5-5420PNT-412R01S1 199020		
				✓	–	–	✓	–	RASP5-5420PNT-412010S1 199000		
				✓	–	–	✓	✓	RASP5-5420PNT-412011S1 199008		
				✓	–	✓	✓	–	RASP5-5420PNT-412R10S1 199016		
				✓	–	✓	✓	✓	RASP5-5420PNT-412R11S1 199024		
			180/207 V DC	✓	–	–	–	–	RASP5-5421PNT-412000S1 198997		
				✓	–	–	–	✓	RASP5-5421PNT-412001S1 199005		
				✓	–	–	–	–	RASP5-5421PNT-412R00S1 199013		
				✓	–	–	–	✓	RASP5-5421PNT-412R01S1 199021		
				✓	–	–	✓	–	RASP5-5421PNT-412010S1 199001		
				✓	–	–	✓	✓	RASP5-5421PNT-412011S1 199009		
				✓	–	✓	✓	–	RASP5-5421PNT-412R10S1 199017		
				✓	–	✓	✓	✓	RASP5-5421PNT-412R11S1 199025		
230/277 V AC	✓	–	–	–	–	RASP5-5422PNT-412000S1 198998					
	✓	–	–	–	✓	RASP5-5422PNT-412001S1 199006					
	✓	–	–	–	–	RASP5-5422PNT-412R00S1 199014					
	✓	–	–	–	✓	RASP5-5422PNT-412R01S1 199022					

- Notes**
- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
 - ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
 - ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
 - ⁴⁾ For actuation of motors with electromechanical brake
 - ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
 - ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
I _e	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60 Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, 2 sensor outputs

5.6	2.2	3	230/277 V AC	✓	-	-	✓	-	RASP5-5422PNT-4120100S1 199002	1 unit
				✓	-	-	✓	✓	RASP5-5422PNT-4120110S1 199010	
				✓	-	✓	✓	-	RASP5-5422PNT-412R100S1 199018	
				✓	-	✓	✓	✓	RASP5-5422PNT-412R110S1 199026	
	400/480 V AC	✓	-	-	-	-	RASP5-5424PNT-4120000S1 198999			
		✓	-	-	-	✓	RASP5-5424PNT-4120010S1 199007			
		✓	-	-	-	-	RASP5-5424PNT-412R000S1 199015			
		✓	-	-	-	✓	RASP5-5424PNT-412R010S1 199023			
		✓	-	-	✓	-	RASP5-5424PNT-4120100S1 199003			
		✓	-	-	✓	✓	RASP5-5424PNT-4120110S1 199011			
		✓	-	✓	✓	-	RASP5-5424PNT-412R100S1 199019			
		✓	-	✓	✓	✓	RASP5-5424PNT-412R110S1 199027			

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

3

Rapid Link 5 decentralized, electronic drive system

PROFINET

Rated operational current ¹⁾ I _e	Assigned motor output ²⁾³⁾ P P		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
	kW	HP		HAN Q4/2 plug	HAN Q5 plug					
RASP5 variable frequency drives										
Rated operating voltage 400 V AC, three-phase Mains voltage (50/60 Hz) U _{LN} 380 (-10%) - 480 (+10%) V 4 sensor inputs, 2 sensor outputs										
8.5	4	5	-	✓	-	-	-	-	RASP5-8420PNT-4120001S1 199028	1 unit
				✓	-	-	-	✓	RASP5-8420PNT-4120011S1 199036	
				✓	-	-	-	-	RASP5-8420PNT-412R001S1 199044	
				✓	-	-	-	✓	RASP5-8420PNT-412R011S1 199052	
				✓	-	-	✓	-	RASP5-8420PNT-4120101S1 199032	
				✓	-	-	✓	✓	RASP5-8420PNT-4120111S1 199040	
				✓	-	✓	✓	-	RASP5-8420PNT-412R101S1 199048	
				✓	-	✓	✓	✓	RASP5-8420PNT-412R111S1 199056	
			180/207 V DC	✓	-	-	-	-	RASP5-8421PNT-4120001S1 199029	
				✓	-	-	-	✓	RASP5-8421PNT-4120011S1 199037	
				✓	-	-	-	-	RASP5-8421PNT-412R001S1 199045	
				✓	-	-	-	✓	RASP5-8421PNT-412R011S1 199053	
				✓	-	-	✓	-	RASP5-8421PNT-4120101S1 199033	
				✓	-	-	✓	✓	RASP5-8421PNT-4120111S1 199041	
				✓	-	✓	✓	-	RASP5-8421PNT-412R101S1 199049	
				✓	-	✓	✓	✓	RASP5-8421PNT-412R111S1 199057	
			230/277 V AC	✓	-	-	-	-	RASP5-8422PNT-4120001S1 199030	
				✓	-	-	-	✓	RASP5-8422PNT-4120011S1 199038	
				✓	-	-	-	-	RASP5-8422PNT-412R001S1 199046	
				✓	-	-	-	✓	RASP5-8422PNT-412R011S1 199054	
				✓	-	-	✓	-	RASP5-8422PNT-4120101S1 199034	
				✓	-	-	✓	✓	RASP5-8422PNT-4120111S1 199042	
				✓	-	✓	✓	-	RASP5-8422PNT-412R101S1 199050	
				✓	-	✓	✓	✓	RASP5-8422PNT-412R111S1 199058	
			400/480 V AC	✓	-	-	-	-	RASP5-8424PNT-4120001S1 199031	
				✓	-	-	-	✓	RASP5-8424PNT-4120011S1 199039	
				✓	-	-	-	-	RASP5-8424PNT-412R001S1 199047	
				✓	-	-	-	✓	RASP5-8424PNT-412R011S1 199055	

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
I_e	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60 Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, 2 sensor outputs

8.5	4	5	400/480 V AC	✓	-	-	✓	-	RASP5-8424PNT-4120101S1 199035	1 unit
				✓	-	-	✓	✓	RASP5-8424PNT-4120111S1 199043	
				✓	-	✓	✓	-	RASP5-8424PNT-412R101S1 199051	
				✓	-	✓	✓	✓	RASP5-8424PNT-412R111S1 199059	

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

3

Rapid Link 5 decentralized, electronic drive system

Ethernet/IP

Rated operation- al current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Model code Catalog number	Std. pack
	I _e A	P kW		P HP	HAN Q4/2 plug			

RAM05 motor starter

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60 Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, 2 sensor outputs

DOL starter

6.6	3	3	–	✓	–	✓	RAM05-D420EIP-412RS1 199117	1 unit
			180/207 V DC	✓	–	✓	RAM05-D421EIP-412RS1 199118	
			230/277 V AC	✓	–	✓	RAM05-D422EIP-412RS1 199119	
			400/480 V AC	✓	–	✓	RAM05-D424EIP-412RS1 199120	

Reversing starter with selector switch REV - OFF - FWD

6.6	3	3	–	✓	–	✓	RAM05-W420EIP-412RS1 199121	1 unit
			180/207 V DC	✓	–	✓	RAM05-W421EIP-412RS1 199122	
			230/277 V AC	✓	–	✓	RAM05-W422EIP-412RS1 199123	
			400/480 V AC	✓	–	✓	RAM05-W424EIP-412RS1 199124	

Notes

- ¹⁾ 0.3 - 6.6 adjustable
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Operation with external 24 V DC supply

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
I_e	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60 Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, 2 sensor outputs

2.4	0.75	1	-	✓	-	-	-	-	RASP5-2420EIP-412R000S1 198868	1 unit
				✓	-	-	-	✓	RASP5-2420EIP-412R010S1 198876	
				✓	-	✓	✓	-	RASP5-2420EIP-412R100S1 198872	
				✓	-	✓	✓	✓	RASP5-2420EIP-412R110S1 198880	
	180/207 V DC	✓	-	-	-	-	RASP5-2421EIP-412R000S1 198869			
		✓	-	-	-	✓	RASP5-2421EIP-412R010S1 198877			
		✓	-	✓	✓	-	RASP5-2421EIP-412R100S1 198873			
		✓	-	✓	✓	✓	RASP5-2421EIP-412R110S1 198881			
	230/277 V AC	✓	-	-	-	-	RASP5-2422EIP-412R000S1 198870			
		✓	-	-	-	✓	RASP5-2422EIP-412R010S1 198878			
		✓	-	✓	✓	-	RASP5-2422EIP-412R100S1 198874			
		✓	-	✓	✓	✓	RASP5-2422EIP-412R110S1 198882			
	400/480 V AC	✓	-	-	-	-	RASP5-2424EIP-412R000S1 198871			
		✓	-	-	-	✓	RASP5-2424EIP-412R010S1 198879			
		✓	-	✓	✓	-	RASP5-2424EIP-412R100S1 198875			
		✓	-	✓	✓	✓	RASP5-2424EIP-412R110S1 198883			
4.3	1.5	2	-	✓	-	-	-	-	RASP5-4420EIP-412R000S1 198884	
				✓	-	-	-	✓	RASP5-4420EIP-412R010S1 198892	
				✓	-	✓	✓	-	RASP5-4420EIP-412R100S1 198888	
				✓	-	✓	✓	✓	RASP5-4420EIP-412R110S1 198896	
	180/207 V DC	✓	-	-	-	-	RASP5-4421EIP-412R000S1 198885			
		✓	-	-	-	✓	RASP5-4421EIP-412R010S1 198893			
		✓	-	✓	✓	-	RASP5-4421EIP-412R100S1 198889			
		✓	-	✓	✓	✓	RASP5-4421EIP-412R110S1 198897			
	230/277 V AC	✓	-	-	-	-	RASP5-4422EIP-412R000S1 198886			
		✓	-	-	-	✓	RASP5-4422EIP-412R010S1 198894			
		✓	-	✓	✓	-	RASP5-4422EIP-412R100S1 198890			

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

3

Rapid Link 5 decentralized, electronic drive system

Ethernet/IP

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack	
I_e	P	P		HAN Q4/2 plug	HAN Q5 plug						
A	kW	HP									
RASP5 variable frequency drives											
Rated operating voltage 400 V AC, three-phase Mains voltage (50/60 Hz) U_{LN} 380 (-10%) - 480 (+10%) V 4 sensor inputs, 2 sensor outputs											
4.3	1.5	2	230/277 V AC	✓	-	✓	✓	✓	RASP5-4422EIP-412R110S1 198898	1 unit	
				✓	-	-	-	-	RASP5-4424EIP-412R000S1 198887		
				✓	-	-	-	✓	RASP5-4424EIP-412R010S1 198895		
				✓	-	✓	✓	-	RASP5-4424EIP-412R100S1 198891		
				✓	-	✓	✓	✓	RASP5-4424EIP-412R110S1 198899		
5.6	2.2	3	-	✓	-	-	-	-	RASP5-5420EIP-412R000S1 198900		
				✓	-	-	-	✓	RASP5-5420EIP-412R010S1 198908		
				✓	-	✓	✓	-	RASP5-5420EIP-412R100S1 198904		
				✓	-	✓	✓	✓	RASP5-5420EIP-412R110S1 198912		
				180/207 V DC	✓	-	-	-	-		RASP5-5421EIP-412R000S1 198901
					✓	-	-	-	✓		RASP5-5421EIP-412R010S1 198909
					✓	-	✓	✓	-		RASP5-5421EIP-412R100S1 198905
					✓	-	✓	✓	✓		RASP5-5421EIP-412R110S1 198913
					230/277 V AC	✓	-	-	-		-
				✓		-	-	-	✓		RASP5-5422EIP-412R010S1 198910
				✓		-	✓	✓	-		RASP5-5422EIP-412R100S1 198906
				✓		-	✓	✓	✓		RASP5-5422EIP-412R110S1 198914
				400/480 V AC		✓	-	-	-		-
					✓	-	-	-	✓		RASP5-5424EIP-412R010S1 198911
					✓	-	✓	✓	-		RASP5-5424EIP-412R100S1 198907
					✓	-	✓	✓	✓		RASP5-5424EIP-412R110S1 198915

Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz At 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

Rated operational current ¹⁾	Assigned motor output ²⁾³⁾		Control voltage external brake (50/60 Hz) ⁴⁾	Power supply via		Repair switch	Internal braking resistance ⁵⁾	STO ⁶⁾	Model code Catalog number	Std. pack
I_e	P	P		HAN Q4/2 plug	HAN Q5 plug					
A	kW	HP								

RASP5 variable frequency drives

Rated operating voltage 400 V AC, three-phase
Mains voltage (50/60 Hz) U_{LN} 380 (-10%) - 480 (+10%) V
4 sensor inputs, 2 sensor outputs

8.5	4	5	-	✓	-	-	-	-	RASP5-8420EIP-412R001S1 198916	1 unit
				✓	-	-	-	✓	RASP5-8420EIP-412R011S1 198924	
				✓	-	✓	✓	-	RASP5-8420EIP-412R101S1 198920	
				✓	-	✓	✓	✓	RASP5-8420EIP-412R111S1 198928	
			180/207 V DC	✓	-	-	-	-	RASP5-8421EIP-412R001S1 198917	
				✓	-	-	-	✓	RASP5-8421EIP-412R011S1 198925	
				✓	-	✓	✓	-	RASP5-8421EIP-412R101S1 198921	
				✓	-	✓	✓	✓	RASP5-8421EIP-412R111S1 198929	
			230/277 V AC	✓	-	-	-	-	RASP5-8422EIP-412R001S1 198918	
				✓	-	-	-	✓	RASP5-8422EIP-412R011S1 198926	
				✓	-	✓	✓	-	RASP5-8422EIP-412R101S1 198922	
				✓	-	✓	✓	✓	RASP5-8422EIP-412R111S1 198930	
			400/480 V AC	✓	-	-	-	-	RASP5-8424EIP-412R001S1 198919	
				✓	-	-	-	✓	RASP5-8424EIP-412R011S1 198927	
				✓	-	✓	✓	-	RASP5-8424EIP-412R101S1 198923	
				✓	-	✓	✓	✓	RASP5-8424EIP-412R111S1 198931	







Notes

- ¹⁾ Rated operational current at a switching frequency of 8 kHz and an ambient air temperature of +40 °C
- ²⁾ For normal internally and externally ventilated four-pole three-phase asynchronous motors with 1500 rpm at 50 Hz and 1800 rpm at 60 Hz
- ³⁾ At 400 V, 50 Hz at 440 - 480 V, 60 Hz
- ⁴⁾ For actuation of motors with electromechanical brake
- ⁵⁾ Integrated brake chopper with braking resistance for dynamic braking
- ⁶⁾ Corresponds to uncontrolled stopping as defined in IEC 60204-1, Stop Category 0.

3

Rapid Link 5 decentralized, electronic drive system


Accessories

	Description	Length m	For use with	Model code Catalog number	Std. pack
	External keypad With multi-language plain text OLED display Front IP54 With approx. 3 m-long, plug-in connection cable (RJ45, 8-pin)	3	DC1, DB1, DA1, RAM05, RASP5	DX-KEY-OLED 169133	1 unit
	Parameter assignment Parameter storage unit and Bluetooth communication stick For storage, copying parameters, and/or transferring parameters to a PC or smartphone (iOS or Android) via Bluetooth with the drivesConnect software or the drivesConnect mobile app respectively With 2 function keys for uploading and downloading parameters with parameter memory.	–	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-COM-STICK3 197585	1 unit
	Programming cable Interface converter USB/RS485 with connection cable, RJ45 8 pole For storage, copying parameters, and/or transferring parameters to a PC with the drivesConnect software, electrically isolated	3	DE1, DE11, DC1, DB1, DA1, RAM05, RASP5	DX-CBL-PC-3M0 744-A3036-00P	1 unit
	Mains connection Power connection cable: For connecting the device to a flat cable outlet from the Wieland podis CON 7G4 system				
	halogen-free, 5 x 1.5 mm ² , with power plug Han Q5 and plug for flexible busbar junction FCS 4 7 SI BU SW Article no. 75.015.5153.1	1.5	RAM05, RASP5	RA-C3/C1-1.5HF 290210	1 unit
	halogen-free, 5 x 1.5 mm ² , with power plug Han Q4/2 and plug for flexible busbar junction FCS 4 7 SI BU SW Article no. 75.015.5153.1	1.5	RAM05, RASP5	RA-Q4/C1-1M5 198283	
	Power connection cable For connecting the device to a Harting Han-Power S energy distributor				
	halogen-free, 5 x 1.5 mm ² , with power plug Han Q5 and plug for Han-Power S 1 x Han Q8 Article no. 09 12 008 4801	1.5	RAM05, RASP5	RA-C3/C2-1.5HF 290211	1 unit
	halogen-free, 5 x 1.5 mm ² , with power plug Han Q4/2 and plug for Han-Power S 1 x Han Q8 Article no. 09 12 008 4801	1.5	RAM05, RASP5	RA-Q4/C2-1M5 198284	
	Motor feeder Motor cable For connecting the motor starter / variable frequency drive to a motor				
	halogen-free, 8 x 1.5 mm ² With plastic Han Q8 plug and unterminated cable end	2	RAM05	RAMO-CM1-2M0 164282	1 unit
		5	RAM05	RAMO-CM1-5M0 164283	
		10	RAM05	RAMO-CM1-10M 164284	
	halogen-free, screened, 4 x 1.5 mm ² + 2 x (2 x 0.75 mm ²) With metal Han Q8 plug and unterminated cable end	2	RASP5	RASP-CM2-2M0 198280	1 unit
		5	RASP5	RASP-CM2-5M0 198281	
		10	RASP5	RASP-CM2-10M 198282	


Engineering

RAMO5 with AS-Interface


RAMO5-D...

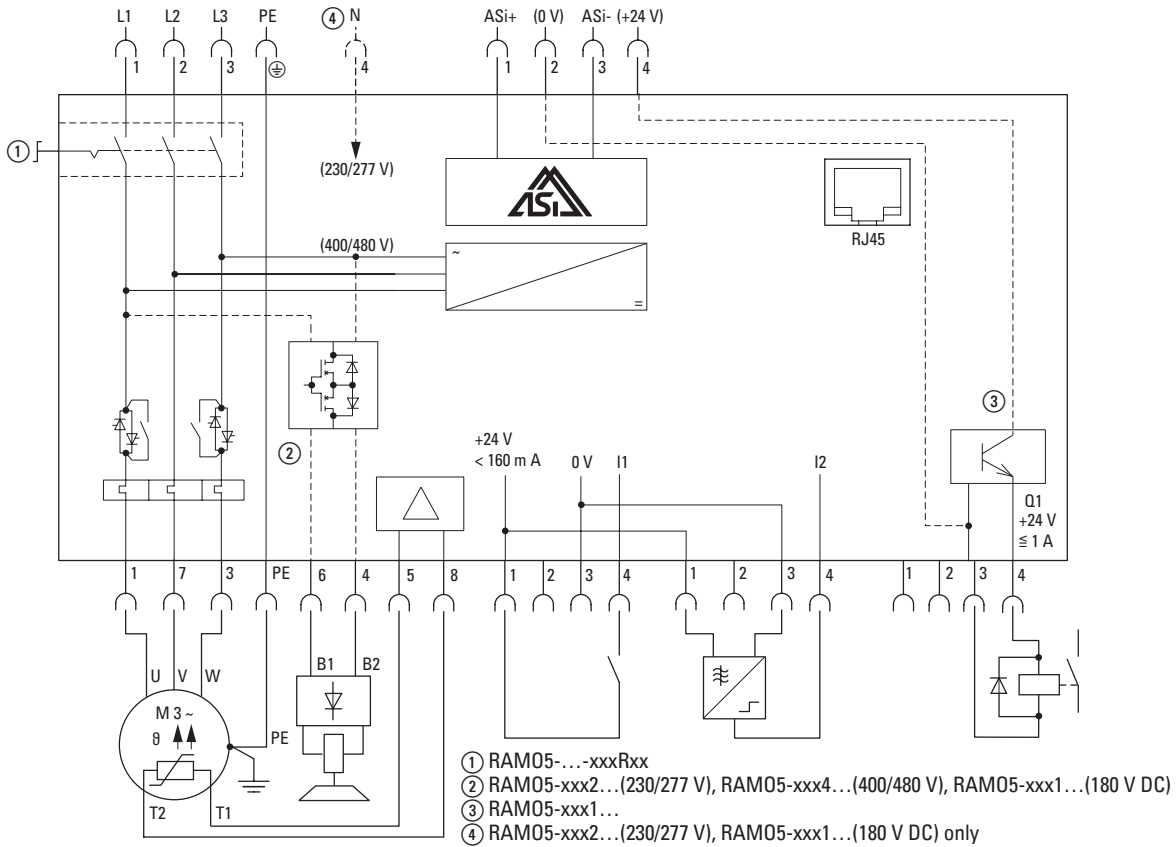

RAMO5-W...

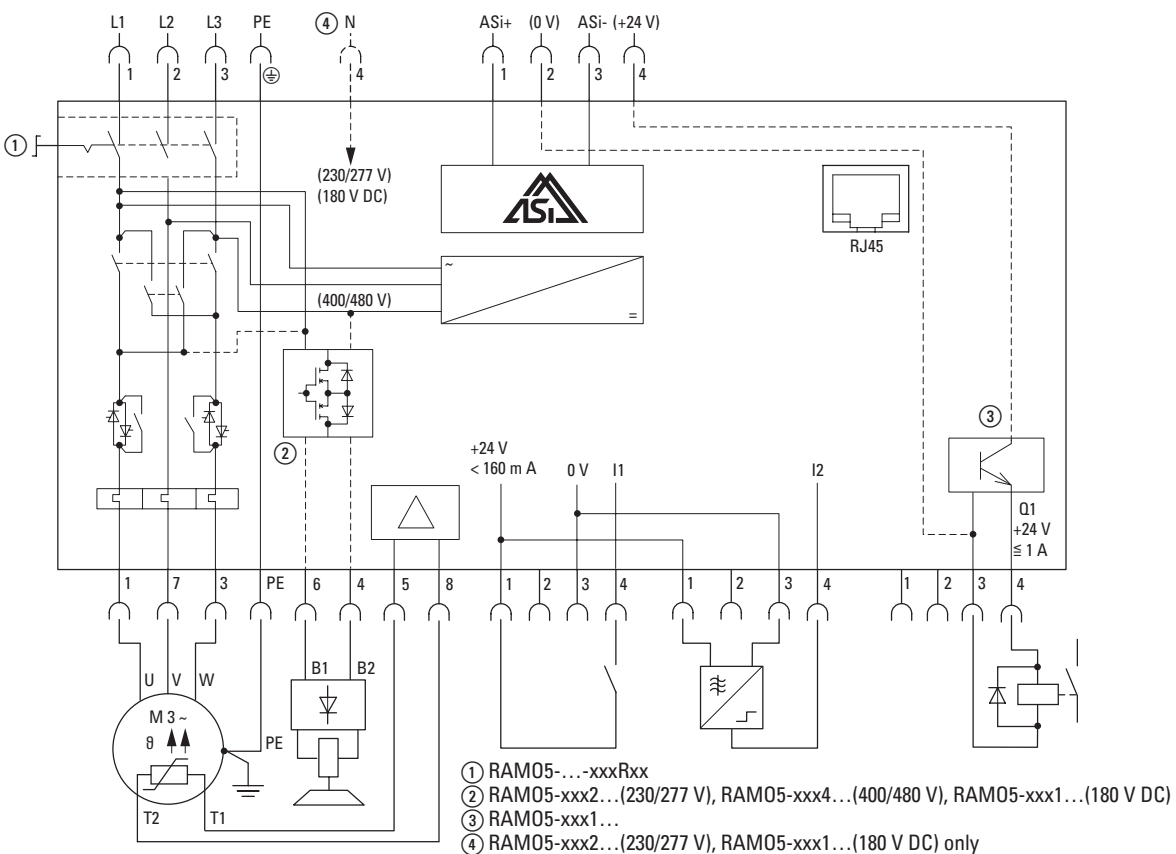


RASP5 with AS-Interface

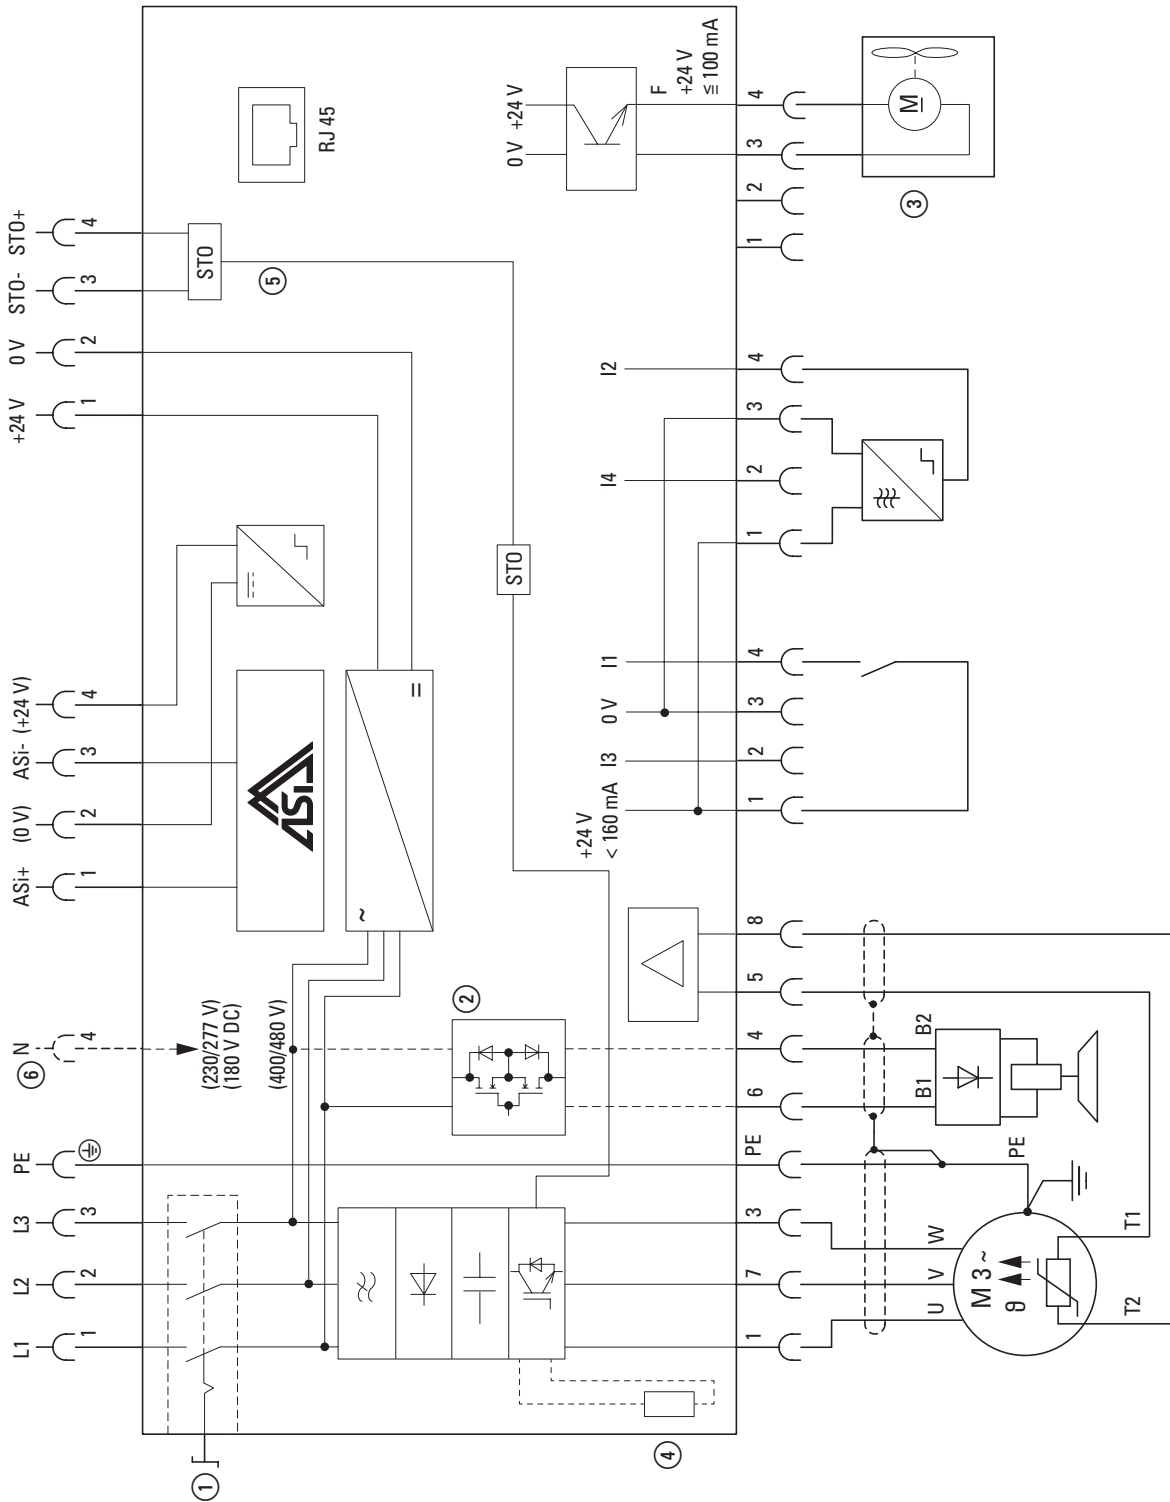


- ① RASP5-...-xxxR...
- ② RASP5-xxx1... (180 V DC)
- ③ RASP5-xxx2... (230/277 V)
- ④ RASP5-xxx3... (400/480 V)
- ⑤ RASP5-...-xxxxx1xx (FAN)
- ⑥ RASP5-...-xxxx1... (Brake resistor)
- ⑦ RASP5-...-xxxx1xxx (STO)
- ⑧ RASP5-xxx1... (180 V DC), RASP5-xxx2... (230/277 V) only

RAMO5 with PROFINET or Ethernet/IP


RAMO5-D...

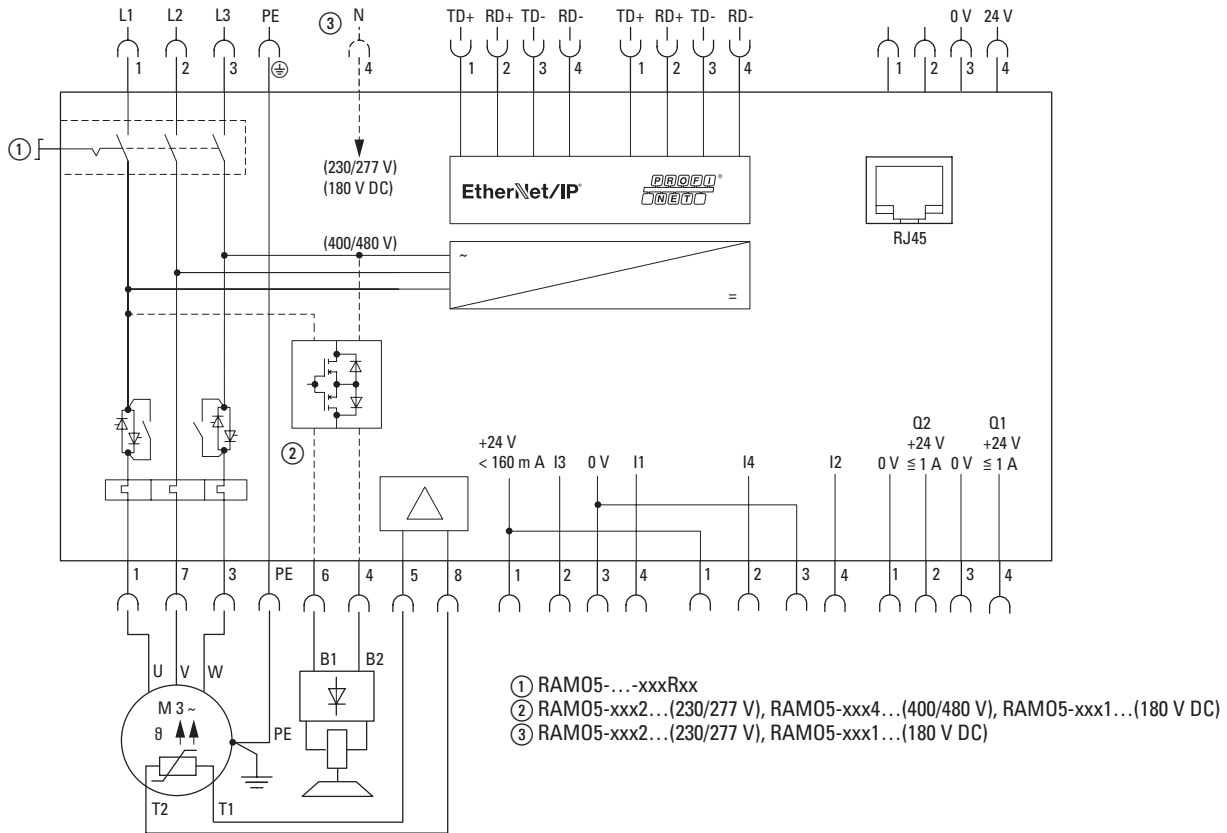

RAMO5-W...

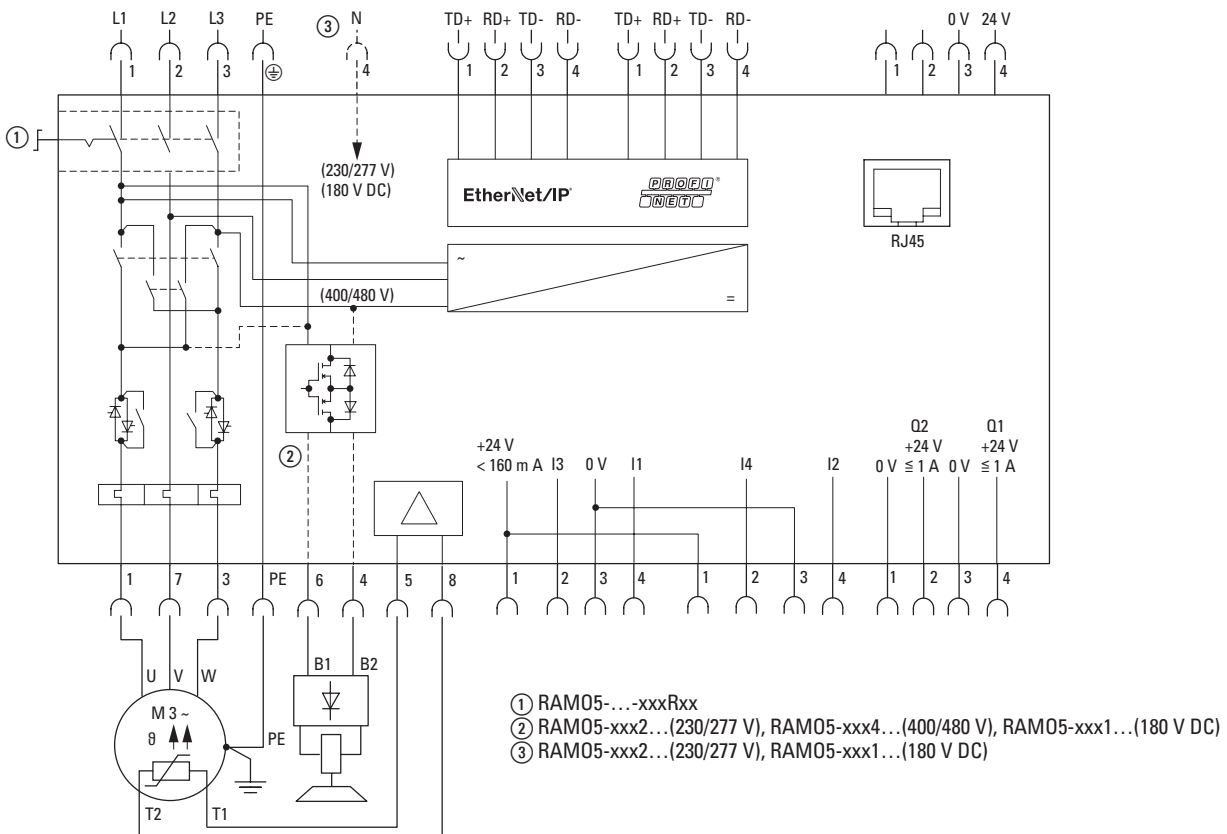

RASP5 with PROFINET or Ethernet/IP

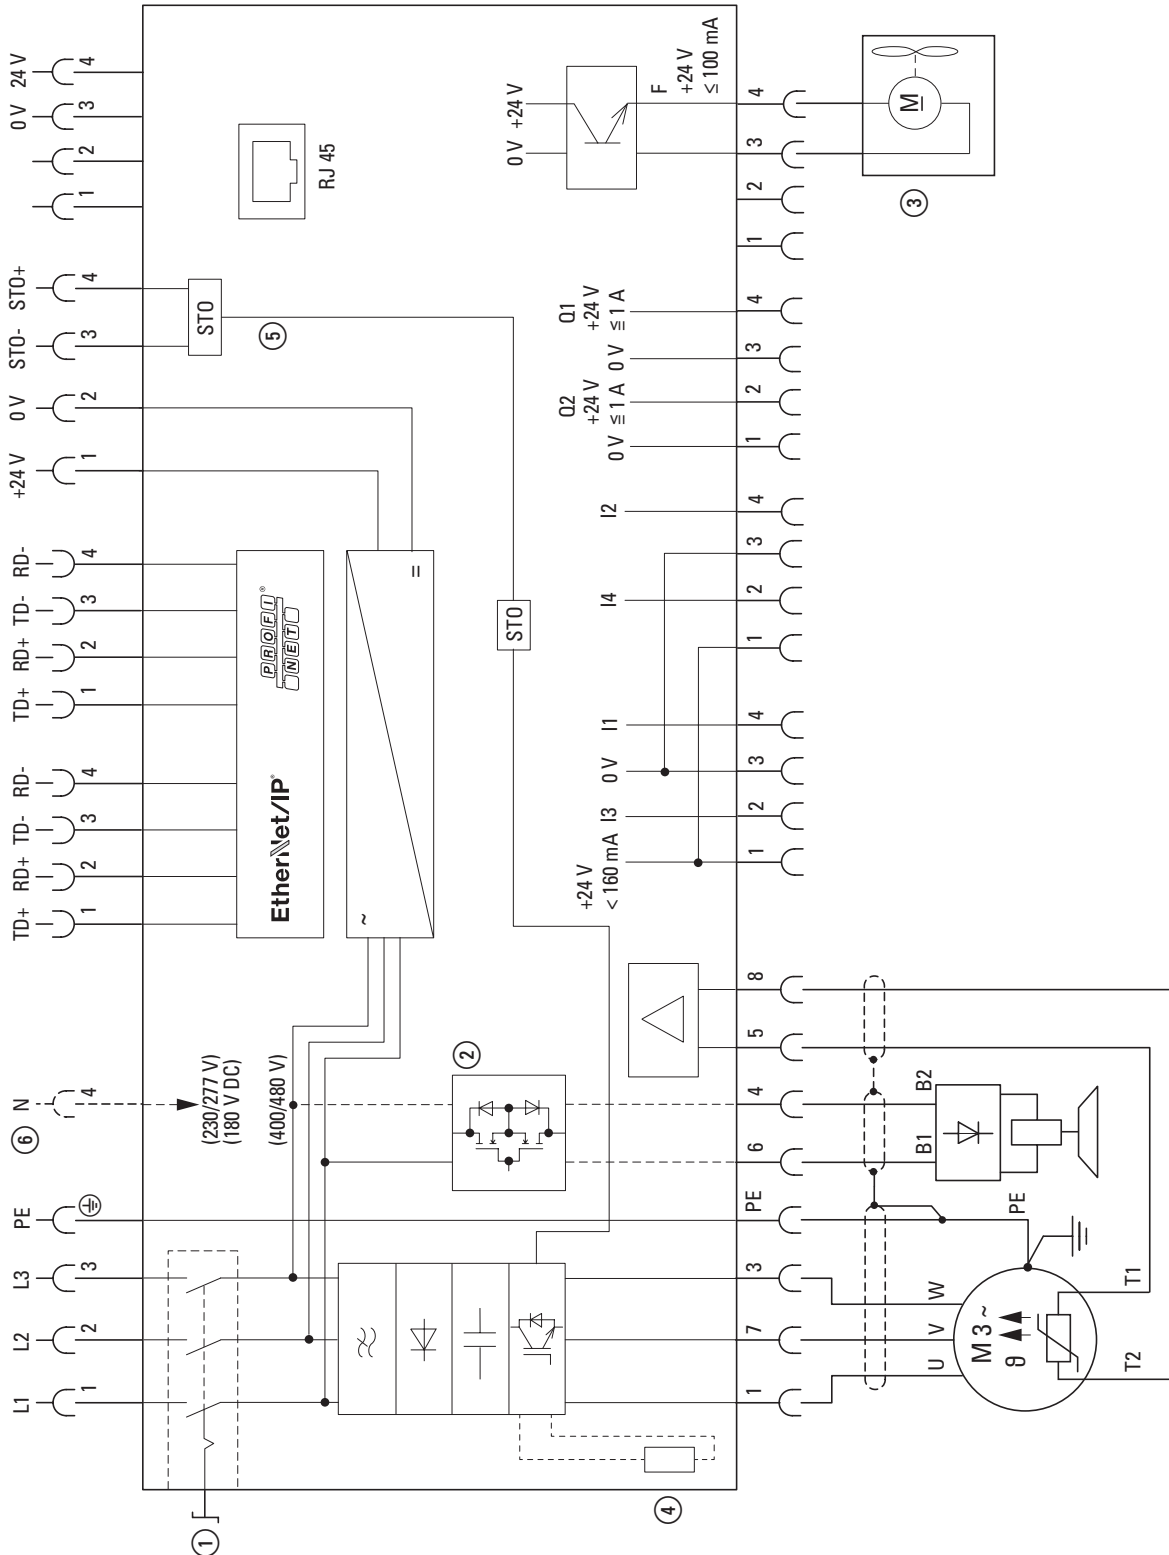

- ① RASP5-...-xxxR...
- ② RASP5-xxx1... (180 V DC)
- ③ RASP5-xxx2... (230/277 V)
- ④ RASP5-xxx3... (400/480 V)
- ⑤ RASP5-...-xxxxx1xx (FAN)
- ⑥ RASP5-...-xxx1... (Brake resistor)
- ⑦ RASP5-...-xxxx1xxx (STO)
- ⑧ RASP5-xxx1... (180 V DC), RASP5-xxx2... (230/277 V) only

Technical specifications

	Formula sign	Unit	Value	
			RAM05	RASP5
General				
Standards			IEC/EN 60947-4-2 EN 50581	IEC/EN 61800-3 IEC/EN 61800-5-1 EN 50581 EN 61800-5-2 EN ISO 13849-1 EN 62061
Approvals, certificates			CE, CCC, cUL	CE, cUL
Production quality			Directive 2011/65/EU (RoHS), ISO 9001	Directive 2011/65/EU (RoHS), ISO 9001
Protection type			IP65, NEMA 12 / NEMA 12K	IP65, NEMA 12 / NEMA 12K
Mounting position			vertical	vertical
Ambient temperature				
Operation		°C	-10 - +40	-10 - +40 (without derating)
Storage		°C	-40 - +70	-40 - +70
Altitude	H	m	0 to 2000 a.s.l., above 1000 m with 1% derating per 100 m	0 to 2000 a.s.l., above 1000 m with 1% derating per 100 m
Humidity (IEC/EN 50178)	p_w	%	< 95%, relative humidity, non-condensing	< 95%, relative humidity, non-condensing
Vibration (IEC/EN 60068-2-6)				
Amplitude		Hz	3 - 15.8 Vibration amplitude: 0.15 mm	3 - 15.8 Vibration amplitude: 0.15 mm
Acceleration		Hz	15.8 - 150 constant acceleration 2 g	15.8 - 150 constant acceleration 2 g
Mechanical shock resistance (IEC/EN 60068-2-27)				
			1000 shocks per shaft, Semisinusoidal 15 g/11 ms	1000 shocks per shaft, Semisinusoidal 15 g/11 ms
Main circuit				
Feeder				
Rated operating voltage	U_e	V	3 AC 400/480	3 AC 400/480
Rated operating voltage for brake control	U_e	V	180/207 V DC 230/277 V AC 400/480 V AC	180/207 V DC 230/277 V AC 400/480 V AC
Voltage levels	U_{LN}	V	380 (-10%) - 480 (+10%)	380 (-10%) - 480 (+10%)
Frequency range	f_{LN}	Hz	50 (-10%) - 60 (+10%)	50/60 (45 - 66 Hz \pm 0%)
Network configuration			Alternating voltage, center-point-earthed star network (TN-S network) Phase-earthed AC supply systems are not permitted.	Alternating voltage, center-point-earthed star network (TN-S network) Phase-earthed AC supply systems are not permitted.
Mains switch-on frequency		Qty.	–	At least a one-minute pause between two switching operations
Mains current	THD	%	< 120	< 120
Short-circuit current	I_k	kA	< 10	< 10
Short-circuit protection device (power bus supply) (Power bus incoming unit)			PKE3/XTUCP-36 FAZ-3-B20 or FAZ-3-C20	PKE3/XTUCP-36 FAZ-3-B20 or FAZ-3-C20
Overvoltage category/ pollution degree (DIN/VDE 0110)			III	III
Rated surge voltage invariability	U_{imp}	kV	4	–
Leakage current to PE earth (EN 50178)	I_{PE}	mA	< 3.5	< 3.5

General rated operational data

	Symbol	Unit	Value	
			RAM05	RASP5
Main circuit				
Power Part				
Instance			RAM05-D: DOL starter with thyristors and bypass contacts RAM05-W: Reversing starter with relays, thyristors and bypass contacts Two-phase controlled	Variable frequency drive with internal DC link and IGBT inverter
Lifespan (AC3)		Qty.	> 10 millions connections	–
Output voltage	U_2	V AC	U_{LN}	0 - U_{LN}
Output frequency	f_2	Hz	50/60 Hz	0 - 50 Hz, max. 500 Hz
Rated operational current	I_e	A	6.6	2.4 / 4.3 / 5.6 / 8.5
Load current for the control unit for an external brake	I	A	≤ 0.6 600 mA konstant, 6 A for 120 ms	≤ 0.6 600 mA konstant, 6 A for 120 ms
Adjustable motor protection	I	A	0.3 - 6.6	0.48 - 8.5
Overload withstand capability				
for 60 s every 600 s at +40 °C	I_L	%	–	150
for 2 s every 20 s at +40 °C	I_H	%	–	200
Allocated motor output ¹⁾				
(with motor protection) with 400 V, 50 Hz	P	kW	0.09 - 3	0.18 - 4
at 440 - 460 V, 60 Hz	P	HP	0.125 - 3	0.25 - 5
Control voltage				
External control voltage	U	V	24, for actuators, maximum load current: 1 A	24, for quick stop function via AS-Interface plug
Tolerance		%	-15 - +20	
AS-Interface Specification				
Total power consumption from AS-Interface power supply unit (30 V)	I	mA	50 + 160 for sensors	50 + 160 for sensors
Profile			S-7.4 S-7.A.E	S-7.4
Station addresses		Qty.	31/62	31
I/O code or I/O configuration			7 (hex)	7 (hex)
ID-code			4 (hex)	4 (hex)

Notes ¹⁾ Assigned motor rating for normal internally and externally ventilated three-phase asynchronous motors with 1500 rpm (at 50 Hz) or 1800 rpm (at 60 Hz).

	Symbol	Unit	Value	
			RAM05-D...	RAM05-W...
RAM05... device series				
Instance			DOL starter L1 → U, L2 → V, L3 → W	Reversing starter FWD: L1 → U, L2 → V, L3 → W REV: L1 → W, L2 → V, L3 → U
Rated operational current	I_e	A	6.6	
Adjustable motor protection		A	0.3 - 6.6	
Assigned motor power at				
400 V, 50 Hz	P	kW	0.18 - 3	
440 - 460 V, 60 Hz	P	HP	0.25 - 4	
Power side (Primary side)				
Number of phases			3	
Device voltage rating	U_{LN}	V	380 V (-10%) - 480 V (+10%), 45 - 66 Hz	
Input current	I_{LN}	A	0.3 - 6.6	
Braking				
Control voltage (external brake)	U	V	RAM05-xxx1...: 180 V DC RAM05-xxx2...: 230/277 V AC RAM05-xxx4...: 400/480 V AC	
Load current (external brake)	I	A	0.6 A, max. 6 A for 120 ms	
Heat dissipation at rated operational current (I_e)	P_v	W	max. 8 W, depending on motor current and brake	
Time of reaction				
Motor On (automatic) ¹⁾	t_{ON}	ms	Motor 20-35, brake 20-35	
Motor Off (automatic) ¹⁾	t_{OFF}	ms	Motor 20-35, brake 20-35	
Switch off the motor (quick stop)	t_{OFF}	ms	Motor 20-35, brake 20-35	
Q1 On	t_{ON}	ms	2 - 20	
Q1 Off	t_{OFF}	ms	2 - 20	
Minimum pulse duration I1/I2	t_{ON}	ms	5	

Notes ¹⁾ Without bus runtime, depending on PLC


Specific rated operational data RASP5

	Symbol	Unit	Value			
			RASP5-2...	RASP5-4...	RASP5-5...	RASP5-8...
RASP5-... device series						
Rated operational current	I_e	A	2.4	4.3	5.6	8.5
Overload current for 60 s every 600 s at 40 °C	I_L	A	3.6	6.5	8.4	12.75
Starting current for 2 s every 20 s at 40 °C	I_L	A	4.8	8.6	11.2	17
Apparent power at 400 V rated operation	S	kVA	1.84	3.27	4.24	6.49
Assigned motor power						
at 400 V, 50 Hz	P	kW	0.75	1.5	2.2	4
at 440 V, 60 Hz	P	HP	1	2	3	5
Setting range Current limitation (P1-08)	I_2	A	0.2 - 2.4	0.4 - 4.3	0.5 - 5.6	0.8 - 8.5
Power side (Primary side)						
Number of phases			3	3	3	3
Rated operating voltage	U_{LN}	V	380 V (-15%) - 480 V (+10%), 50/60 Hz (380 - 480 V \pm 0%, 45 - 66 Hz \pm 0%)			
Input current	I_{LN}	A	2.5	4.1	5.3	7.8
Braking						
Braking value	I/I_e	%	≤ 30	≤ 30	≤ 30	≤ 30
Switch-on threshold for the braking transistor	U_{DC}	V DC	765	765	765	765
DC-braking	I/I_e	%	≤ 100 , adjustable	≤ 100 , adjustable	≤ 100 , adjustable	≤ 100 , adjustable
Rated operating voltage for brake control	U	V AC	RASP5-xx1... (180 V DC) RASP5-xx2... (230/277 V AC) RASP5-xx4... (400/480 V AC)			
Switching frequency	f_{PWM}	kHz	8 (adjustable 4 - 32)			
U/f characteristic			linear	linear	linear	linear
Heat dissipation at rated operational current (I_e) and a pulse frequency (f_{PWM}) of 6 kHz	P_v	W	32	46	58	95
Heat dissipation at idle (standby) with AS-Interface supply voltage	P_v	W	< 9	< 9	< 9	< 12
Efficiency	η		0.97	0.98	0.98	0.98
Fans						
internal			temperature controlled			
Device fans on heat sink			–	–	–	Fans
Output frequency	f_z	Hz	50/60 (adjustable 0 - 320)			
1. fixed frequency (P1-12)	f_z	Hz	30	30	30	30
2. fixed frequency (P2-01)	f_z	Hz	40	40	40	40
3. fixed frequency (P2-02)	f_z	Hz	50	50	50	50
4. fixed frequency (P2-03)	f_z	Hz	50	50	50	50
Factory set response time						
Motor On (automatic) ¹⁾	t_{ON}	ms	< 10	< 10	< 10	< 10
Motor Off (automatic) ¹⁾	t_{OFF}	ms	< 10	< 10	< 10	< 10
Switch off the motor (quick stop)	t_{OFF}	ms	< 10	< 10	< 10	< 10
Minimum pulse duration I3/I4	t_{ON}	ms	5	5	5	5
Longest permissible length of motor cable (EMC, 2nd environment, C3)	l	m	25	25	25	25


Notes ¹⁾ Without bus runtime, depending on PLC.

Dimensions and weights


RAM05-...-xxx0xx

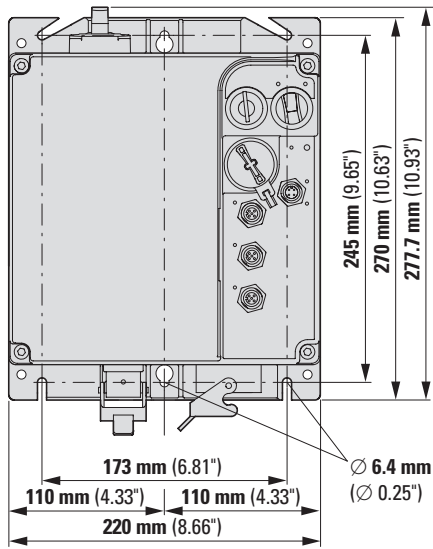


RAM05-...-xxx0xx

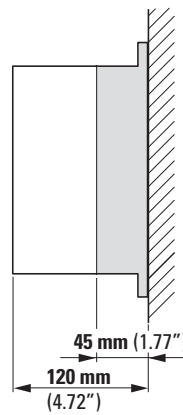


RAM05-...-xxxRxx

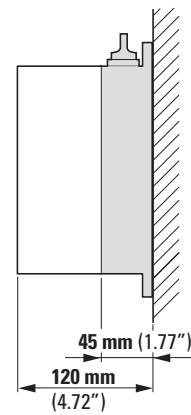


RASP5-...-xxx0xx0xx

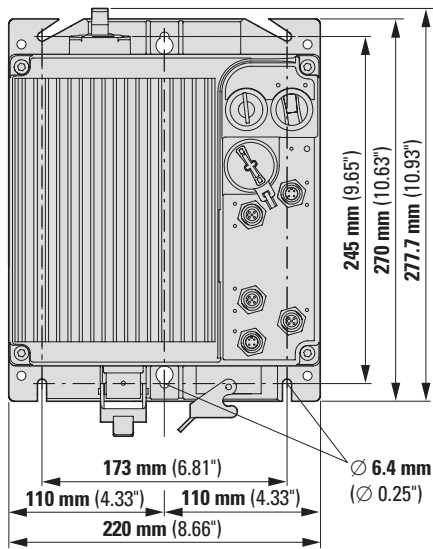

RASP5-...-xxx0xx1xx

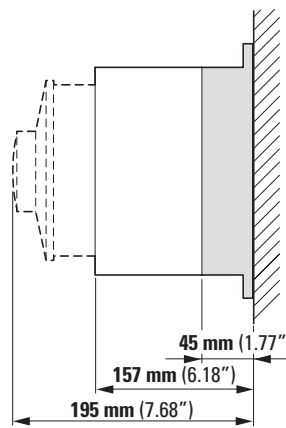

RASP5-...-xxxR

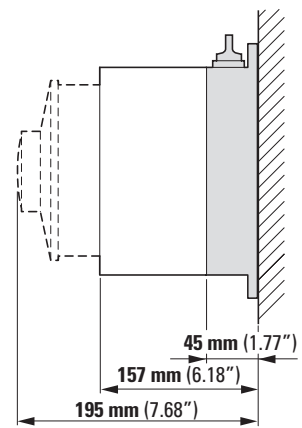

Full-load motor-running currents in amperes corresponding to various AC horsepower ratings

HP	110 - 120 V			220 - 240 V ¹⁾²⁾			360 - 380 V		440 - 480 V			550 - 600 V		
	Single phase	Two phase	Three phase	Single phase	Two phase	Three phase	Single phase	Three phase	Single phase	Two phase	Three phase	Single phase	Two phase	Three phase
1/10	3.0	–	–	1.5	–	–	1.0	–	–	–	–	–	–	–
1/8	3.8	–	–	1.9	–	–	1.2	–	–	–	–	–	–	–
1/6	4.4	–	–	2.2	–	–	1.4	–	–	–	–	–	–	–
1/4	5.8	–	–	2.9	–	–	1.8	–	–	–	–	–	–	–
1/3	7.2	–	–	3.6	–	–	2.3	–	–	–	–	–	–	–
1/2	9.8	4.0	4.4	4.9	2.0	2.2	3.2	1.3	2.5	1.0	1.1	2.0	0.8	0.9
3/4	13.8	4.8	6.4	6.9	2.4	3.2	4.5	1.8	3.5	1.2	1.6	2.8	1.0	1.3
1	16.0	6.4	8.4	8.0	3.2	4.2	5.1	2.3	4.0	1.6	2.1	3.2	1.3	1.7
1-1/2	20.0	9.0	12.0	10.0	4.5	6.0	6.4	3.3	5.0	2.3	3.0	4.0	1.8	2.4
2	24.0	11.8	13.6	12.0	5.9	6.8	7.7	4.3	6.0	3.0	3.4	4.8	2.4	2.7
3	34.0	16.6	19.2	17.0	8.3	9.6	10.9	6.1	8.5	4.2	4.8	6.8	3.3	3.9
5	56.0	26.4	30.4	28.0	13.2	15.2	17.9	9.7	14.0	6.6	7.6	11.2	5.3	6.1
7-1/2	80.0	38.0	44.0	40.0	19.0	22.0	27.0	14.0	21.0	9.0	11.0	16.0	8.0	9.0
10	100	48.0	56.0	50.0	24.0	28.0	33.0	18.0	26.0	12.0	14.0	20.0	10.0	11.0
15	135	72.0	84.0	68.0	36.0	42.0	44.0	27.0	34.0	18.0	21.0	27.0	14.0	17.0
20	–	94.0	108	88.0	47.0	54.0	56.0	34.0	44.0	23.0	27.0	35.0	19.0	22.0
25	–	118	136	110	59.0	68.0	70.0	44.0	55.0	29.0	34.0	44.0	24.0	27.0
30	–	138	160	136	69.0	80.0	87.0	51.0	68.0	35.0	40.0	54.0	28.0	32.0
40	–	180	208	176	90.0	104	112	66.0	88.0	45.0	52.0	70.0	36.0	41.0
50	–	226	260	216	113	130	139	83.0	108	56.0	65.0	86.0	45.0	52.0
60	–	–	–	–	133	154	–	103	–	67.0	77.0	–	53.0	62.0
75	–	–	–	–	166	192	–	128	–	83.0	96.0	–	66.0	77.0
100	–	–	–	–	218	248	–	165	–	109	124	–	87.0	99.0
125	–	–	–	–	–	312	–	208	–	135	156	–	108	125
150	–	–	–	–	–	360	–	240	–	156	180	–	125	144
200	–	–	–	–	–	480	–	320	–	208	240	–	167	192
250	–	–	–	–	–	602	–	403	–	–	302	–	–	242
300	–	–	–	–	–	–	–	482	–	–	361	–	–	289
350	–	–	–	–	–	–	–	560	–	–	414	–	–	336
400	–	–	–	–	–	–	–	636	–	–	477	–	–	382
500	–	–	–	–	–	–	–	786	–	–	590	–	–	472

Notes

¹⁾ To obtain full-load currents for 200 and 208 V motors, increase corresponding 220 - 240 V ratings by 15 and 10 percent, respectively.

²⁾ To obtain full-load currents for 265 and 277 V motors, decrease corresponding 220 - 240 V ratings by 13 and 17 percent, respectively.

Quote from "Power Conversion Equipment - UL 508C, May 3, 2002".

Reproduced from UL 508 C, Power Conversion Equipment, 3rd edition (May 2, 2002) with permission of Underwriters Laboratories Inc.

Rated operational current (in amperes) and shaft power (in kilowatts) of standard three-phase squirrel-cage motors (in conformity with IEC 60947-4-1)

Minimum fuse size for short-circuit protection of three-phase motors

The maximum value depends on the switching device or the overload relay.

Motor Power			230 V			400 V			440 V			500 V			690 V		
			Rated motor current	Fuse Starting		Rated motor current	Fuse Starting		Rated motor current	Fuse Starting		Rated motor current	Fuse Starting		Rated motor current	Fuse Starting	
kW	cos φ	η (%)	A	Direct	Y/Δ	A	Direct	Y/Δ	A	Direct	Y/Δ	A	Direct	Y/Δ	A	Direct	Y/Δ
0.06	0.7	58	0.37	2	–	0.21	2	–	0.19	2	–	0.17	2	–	0.12	2	–
0.09	0.7	60	0.54	2	–	0.31	2	–	0.28	2	–	0.25	2	–	0.18	2	–
0.12	0.7	60	0.72	4	2	0.41	2	–	0.37	2	–	0.33	2	–	0.24	2	–
0.18	0.7	62	1.04	4	2	0.6	2	–	0.54	2	–	0.48	2	–	0.35	2	–
0.25	0.7	62	1.4	4	2	0.8	4	2	0.76	2	–	0.7	2	–	0.5	2	–
0.37	0.72	66	2	6	4	1.1	4	2	1	4	2	0.9	2	2	0.7	2	–
0.55	0.75	69	2.7	10	4	1.5	4	2	1.4	4	2	1.2	4	2	0.9	4	2
0.75	0.79	74	3.2	10	4	1.9	6	4	1.7	4	2	1.5	4	2	1.1	4	2
1.1	0.81	74	4.6	10	6	2.6	6	4	2.4	4	2	2.1	6	4	1.5	4	2
1.5	0.81	74	6.3	16	10	3.6	6	4	3.3	6	4	2.9	6	4	2.1	6	4
2.2	0.81	78	8.7	20	10	5	10	6	4.6	10	6	4	10	4	2.9	10	4
3	0.82	80	11.5	25	16	6.6	16	10	6	16	10	5.3	16	6	3.8	10	4
4	0.82	83	14.8	32	16	8.5	20	10	7.7	16	10	6.8	16	10	4.9	16	6
5.5	0.82	86	19.6	32	25	11.3	25	16	10.2	20	10	9	20	16	6.5	16	10
7.5	0.82	87	26.4	50	32	15.2	32	16	13.8	25	16	12.1	25	16	8.8	20	10
11	0.84	87	38	80	40	21.7	40	25	19.8	32	25	17.4	32	20	12.6	25	16
15	0.84	88	51	100	63	29.3	63	32	26.6	50	32	23.4	50	25	17	32	20
18.5	0.84	88	63	125	80	36	63	40	32.8	63	32	28.9	50	32	20.9	32	25
22	0.84	92	71	125	80	41	80	50	37	80	40	33	63	32	23.8	50	25
30	0.85	92	96	200	100	55	100	63	50	100	63	44	80	50	32	63	32
37	0.86	92	117	200	125	68	125	80	61	125	80	54	100	63	39	80	50
45	0.86	93	141	250	160	81	160	100	74	125	100	65	125	80	47	80	63
55	0.86	93	173	250	200	99	200	125	90	125	100	79	160	80	58	100	63
75	0.86	94	233	315	250	134	200	160	122	160	125	107	200	125	78	160	100
90	0.86	94	279	400	315	161	250	200	146	200	160	129	200	160	93	160	100
110	0.86	94	342	500	400	196	315	200	179	250	200	157	250	160	114	200	125
132	0.87	95	401	630	500	231	400	250	210	315	250	184	250	200	134	250	160
160	0.87	95	486	630	630	279	400	315	254	400	250	224	315	250	162	250	200
200	0.87	95	607	800	630	349	500	400	318	400	315	279	400	315	202	315	250
250	0.87	95	–	–	–	437	630	500	397	630	400	349	500	400	253	400	315
315	0.87	96	–	–	–	544	800	630	495	630	630	436	630	500	316	500	400
400	0.88	96	–	–	–	683	1000	800	621	800	800	547	800	630	396	630	400
450	0.88	96	–	–	–	769	1000	800	699	800	800	615	800	630	446	630	630
500	0.88	97	–	–	–	–	–	–	–	–	–	–	–	–	491	630	630
560	0.88	97	–	–	–	–	–	–	–	–	–	–	–	–	550	800	630
630	0.88	97	–	–	–	–	–	–	–	–	–	–	–	–	618	800	630

Notes

The rated motor currents apply to normal internally and surface-cooled three-phase motors with 1500 rpm.
DOL starting: Starting current max. 6 × rated motor current.
Starting time max. 5 s.
Y/Δ-start: Starting current max. 2 × motor rated current.
Starting time max. 15 s.
Set overload relay in line to 0.58 × motor rated current.

Fuse ratings at Y/Δ starting apply also to three-phase slipring motors.
For higher rated currents, starting currents and/or longer starting times, larger fuses will be required.
Table applies for time delay and gL fuses (VDE 0636)


For low voltage h.b.c. fuses with aM characteristics, the fuse should be equal to the rated current.

Drives engineering selection criteria


Each drive task requires a drive motor. The speed, torque and controllability of each motor must fulfill the requirements of the task. The following generally applies: the application determines the drive. The drive motor most frequently used worldwide in industrial plants and large buildings is the three-phase asynchronous motor. Its robust and simple construction as well as its high degrees of protection and standard types are the main features of this inexpensive electric motor.

Motor connection


When connecting a three-phase motor to the mains supply, the data on the rating plate of the motor must correspond to the mains voltage and frequency. The standard connection is implemented via six screw terminals in the terminal box of the motor and with two types of circuit, the star connection and the delta circuit, depending on the mains voltage.



The rotation direction of a motor is always determined by directly looking at the drive shaft of the motor (from the drive end). On motors with two shaft ends, the driving end is denoted with D (= Drive), the non-driving end with N (= No drive).




Regardless of the circuit type and the type of three-phase asynchronous motor, the connections must be labeled, so that their alphabetical sequence (e.g. U1, V1, W1) corresponds with the order of the mains voltage phase sequence (L1, L2, L3) and causes the motor to rotate clockwise.



On the three-phase asynchronous motor, three windings are arranged offset from each other by $120^\circ/p$ (p = number of pole pairs). To generate a rotating field in the motor, an alternating voltage is applied to each phase in turn at a time delay of 120° .

The effect of inductance causes the rotation field and torque to be formed in the rotor winding. The speed of the motor thus depends on the number of pole pairs and the frequency of the supply voltage. The operating direction can be reversed by swapping over two of the supply phases.




FWD = forward run (clockwise rotation field)
REV = reverse run (anticlockwise rotation field active)

Information on the rating plate


The electrical and mechanical rating data of the motor must be stated on its rating plate (IEC 34-1, VDE 0530). The data on the rating plate describes the stationary operation of the motor in the area of its operating point (M_N , e.g. at 400 V and 50 Hz). The operational data is unstable in the motor start phase. The following examples show the rating plates for two motors with a motor shaft output of 4 kW and the respective connection circuits on a three-phase AC network with 400 V and 50 Hz.

Star connection

230 / 400 V	Δ / Y	14.5 / 8.5 A
S1	4.0 kW	$\cos \varphi$ 0.82
1410 min ⁻¹		50 Hz
IP 54 Iso. KI F		




$$U_{LN} = \sqrt{3} \times U_W \quad I_{LN} = I_W$$



- With the specified 230/400 V voltage, this motor must be connected to the three-phase system ($U_{LN} = 400$ V) in a star-connected circuit.
- The voltage of each motor winding is designed for 230 V. The windings must therefore be connected in sequence to the phase voltage (400 V).
- The three winding phases (W2-U2-V2) are configured in the terminal box to the so-called star point. The voltage of the individual phases to the star point is 230 V (= UW).

Startup characteristics


The following figure shows the characteristic startup curves of a three-phase asynchronous motor.



- I_A : Starting current
- I_N : Rated operational current at the operating point
- M_A : Starting torque
- M_B : Accelerating torque ($M_M > M_L$)
- M_K : Breakdown torque
- M_L : Load torque
- M_M : Motor torque
- M_N : Rated load torque, (stable operating point, intersection point of the three-phase speed torque characteristic with the load characteristic)
- M_S : Pull-up torque
- n : Speed (actual value)
- n_N : Rated speed at the operating point
- n_S : Synchronous speed ($n_S - n_N =$ slip speed s)

Delta circuit

400 / 690 V	Δ / Y	8.5 / 4.9 A
S1	4.0 kW	$\cos \varphi$ 0.82
1410 min ⁻¹		50 Hz
IP 54 Iso. KI F		



$$U_{LN} = U_W \quad I_{LN} = \sqrt{3} \times I_W$$



- With the specified 400/690 V voltage, this motor must be connected to the three-phase system ($U_{LN} = 400$ V) in a delta circuit.
- Each motor winding is designed for the maximum phase voltage of 400 V and can be connected directly.
- The three winding phases (U1 - W2, V1 - U2, W1 - V2) are combined in the terminal box and connected directly to the individual phases.

Synchronous speed:

$$n_S = \frac{f}{p}$$

Slip speed in %:

$$s = \frac{n_S - n}{n_S} \times 100\%$$

Three-phase asynchronous motor speed:

$$n = \frac{f}{p} \times (1 - s)$$

f : Frequency of voltage in Hz (= s⁻¹)

n : Speed in r.p.m.

p : Number of pole pairs

s : Slip speed in r.p.m.

Electric power:

$$P_1 = U \cdot I \cdot \sqrt{3} \cdot \cos \varphi$$

P_1 : Electrical power in W

U : Rated operating voltage in V

I : Rated operational current in A

$\cos \varphi$: Power factor

Motor output (power equation):

$$P_2 = \frac{M_N \times n}{9550}$$

P_2 : Mechanical shaft output power in kW

M_N : Rated torque in Nm

n : Speed in r.p.m.

Efficiency:

$$\eta = \frac{P_2}{P_1}$$



Global export of machines and systems

European machine and system building and worldwide exports are closely related. Even if you don't export your machines at present, you should be prepared for it in the future. Eaton provides switchgear and protective devices with all the essential approvals and certificates for machine and system building. In most countries around the world, conformity with international standards is the sole requirement for successful exports. This is because components in these locations are governed by compliance with well known and established IEC standards. In this respect, the European CE mark is not only the passport for exports within Europe but also far beyond its borders.



World market equipment for machine building

Nearly all the switchgear and protective devices of Eaton's Moeller series are world market devices. Each product range thus carries all the approvals and certification marks required for worldwide use.

These product ranges include among others


- Pilot devices, limit switches
- Contactors and various timing and special relays
- Motor protective circuit breakers
- Electronic components and systems.

With circuit breakers and switch-disconnectors, Eaton offers IEC devices for use in most countries in the world and NA devices with virtually the same dimensions and the same accessories for the North American market. This considerably simplifies device selection since the North American standards often involve the need for considerably different technical specifications.

The standards for electrical products and their applications are not internationally harmonized.

The most significant deviations from the IEC standards are found in North America, i.e. in the U.S.A. and Canada. Many newcomers to the export business are initially surprised by the different opinions and solutions that prevail in different countries.

For example, for export to North America, special components are sometimes required, such as dedicated handles for main switches that can only be actuated by deliberately operating an additional handle when the control cabinet door is open. Likewise, European motor protective circuit breakers are only accepted in combination with an upstream protective device (such as a UL248 fuse) or with increased air and creepage distances at the input terminals. Eaton is your expert partner for all matters related to export.



Notes on the changes to the 2020 NEC and 2017 NEC

This publication covers all major “chapters,” “articles” and “parts” of the NEC 2020. Each code section is labeled “REVISION” or “NEW,” followed by an explanation of its significance and references to the relevant NEC sections, with information about what to look out for in order to determine if a machine is code-compliant, including a detailed explanation of the standard where necessary.




Accurate information is an important key to success



The Eaton data sheets on eaton.com provide reliable information about the North American approvals of our components. For each product, you will find information about the applicable product standard, the e-file number, the category control number or the CSA class number. You can incorporate this information into your parts lists and documentation to ensure that you are well prepared for acceptance testing.

Degree of protection	IP65 UL/CSA Types 1, 12, 13, 4X, indoor only 4X (NEMA) IK10 IP65 (IEC)
Certifications	UL508A UL listed UL (Category Control Number NITW) UL (File No. E499317) Specially designed for North America

All important information is listed there for each product, for example, whether the product is suitable for use in feeders or branch circuits, the maximum operating voltage or the respective North American protection class, for example UL/CSA Type 4X.

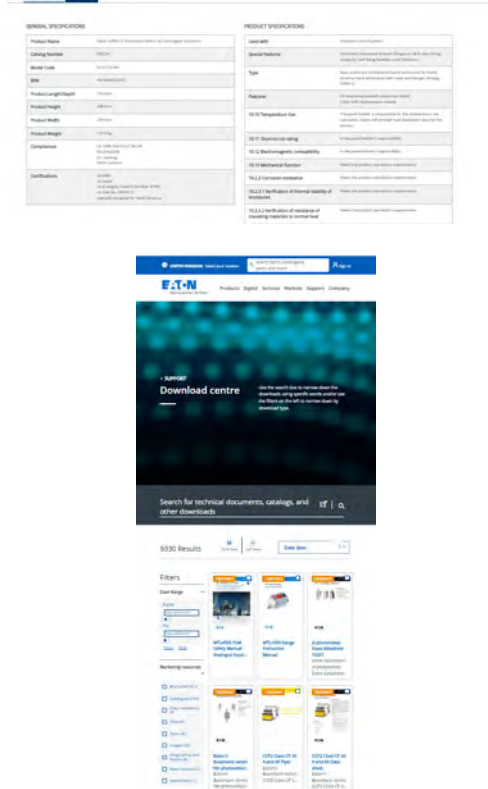

For any technical documentation, catalogs or other relevant product documents, please use the central download centre available at:

Eaton.com/documentation

The approvals and certifications for each component type are available in the data sheets of the respective products. The same information can also be found in the databases maintained by the respective authorities.



To find the right contact person:

At Eaton, we believe that building and maintaining strong relationships with our customers is something that deserves our undivided attention.

This is why you can rest assured knowing that you will be able to count on us for every project from the very start. To find out whom to contact for your needs, please visit our website:

In just a few steps, we will get you the contact information for the person or team in charge of support for your specific industry in your region.

To find the right contact person anywhere in the world, visit: Eaton.com/EatonCare

Do you have questions about our products?

Our technical support will advise you on all questions concerning our products.

Technical Support

Eaton.com/eatoncare

Your contact persons in your region:

Eaton.com/contacts

Helpline

E-Mail: AfterSalesEGBonn@eaton.com

Internet: Eaton.com/aftersales

Onsite Service

Troubleshooting, inspections, tests, maintenance, commissioning

Repairs

Replacement devices and spare parts for current and discontinued products; direct/warranty replacement for select products; repairs

Online Services

Downloads, FAQs and interactive troubleshooting

Eatons After Sales Service

Eaton is known for its unparalleled after-sales support for all low-voltage switchgear, switchgear systems, and services.

Service Specialists

Gain the benefit of our Service personnel. Comprehensive expertise linked with long term experience and modern equipment help you find the solution to your tasks.

Material

Components, cards and spare parts of the Eaton product range are available for your use.

Service products

The After Sales Service offers appropriate service products for the Eaton products.

For more detailed information, please visit Eaton.com/support



Eaton is an intelligent power management company dedicated to protecting the environment and improving the quality of life for people everywhere. We make products for the data center, utility, industrial, commercial and institutional, machine building, residential, aerospace and mobility markets. We are guided by our commitment to do business right, to operate sustainably and to help our customers manage power – today and well into the future. By capitalizing on the global growth trends of electrification and digitalization, we're helping to solve the world's most urgent power management challenges and building a more sustainable society for people today and generations to come.

For more information, visit www.eaton.com.

Eaton addresses worldwide: Eaton.com/contacts

EatonI

EMEA Headquarters
Route de la Longeraie 7
1110 Morges
Switzerland
Eaton.com

**Electrical Sector
Eaton Industries GmbH**

Hein-Moeller-Str. 7-11
53115 Bonn / Germany

The products, information and prices contained in this document are subject to change. The same is true for any errors or omissions. Only the order confirmation and the technical documentation received from Eaton are binding. Photos and illustrations are indicative only and do not serve as proof of any appearance or functionality. Their use in any form must be approved in advance by Eaton. The same applies for brand names (in particular Eaton, Moeller, Cutler-Hammer, Cooper and Bussmann). Eaton's terms of sale, as published on Eaton's websites and included with order confirmations received from Eaton, apply.

©2014 Eaton
All Rights Reserved
Publication no.: CA04020001Z-EN-INT
April 2026

Eaton is a registered trademark.
All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

